superlux

we engineer light



34

Lighting Catalogue

This comprehensive specifiers catalogue replaces all previous catalogues.

For our full and most up to date range visit our website.

70 Years of Ingenuity



You can be assured SUPPLIER DECLARATION OF COMPLIANCE WITH STANDARDS

Superlux is committed to the electrical safety of all products sold, and in addition to our in-house engineering facilities we utilise the independent services of laboratories to verify product compliance. Where required by New Zealand and Australian regulations, our products also have all necessary regulatory approvals and/or declarations.

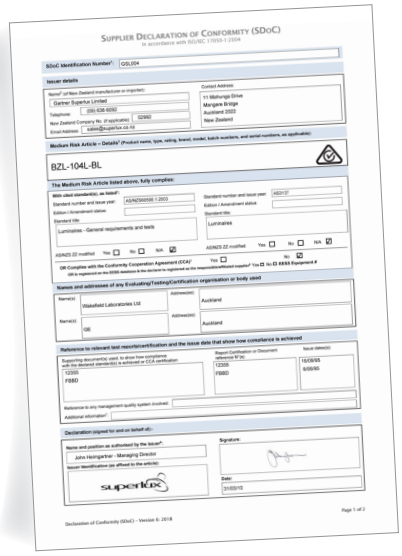
SUPPLIER DECLARATION OF CONFORMITY (SDoC)

BZL-104L-BL

Where applicable SDocs are available on our product pages to download from our website.

www.superlux.co.nz
www.superlux.com.au

Where to buy

2000 lines stocked in our Auckland Warehouse for immediate dispatch nationwide throughout New Zealand and Australia

All Superlux products can be purchased on-line at **www.alphalighting.co.nz** (NZ Only)

Or Purchase from your local independent lighting retailer or electrical merchant near you.

For business to business sales contact our team via email **b2bsales@superlux.co.nz** or by phone 09 636 6092

New Zealand Owned and Operated Since 1955

superlux
we engineer light

Contents

Task Lighting

12-25

Downlights

26-41

Button & Oyster Lights

42-50

Strip lighting

51-60

Spotlighting

61-71

Track Lighting

72-78

Wall Lights Interior

79-91

Wall and Ceiling Decorative Lighting

92-132

Shades, Suspension & Components

133-141

Pathway & Step Lights

142-150

Bulkheads - Exterior wall and ceiling

151-167

Lanterns, Bollards and Globes

168-203

Landscape Lighting

204-218

Flood & Area Lighting

219-223

Sensors

224-226

Furniture and Display Lights

227-232

Control Gear & Electrical Products

233-236

Lamps - Light Sources

237-247

Index

PRODUCT	PAGE
720-22	185
720-32	185
720-32-QF	184

248-255

IP Chart and Reference Icons


256-257



Superlux over 70 Years of ingenuity, a 100% NZ owned company!

Number 8 wire outside of the box thinking

Having actively manufactured product for over 60 years, when Superlux adds a new lighting fixture to its extensive family of products they are scrutinised to exacting standards. They are designed to spec, many completely from scratch which is all done here locally in NZ.

Made for New Zealand



We dont just buy product off the shelf and sell it onto our customers. We are excited to produce products which are innovative and designed better, with added benefits of easier installation and better performance within the NZ environment. We are dedicated to NZ ingenuity and feedback from our customers allows us to provide products which solve issues, reduce costs and enable better margins for kiwi electricians and competitive prices for the end user.

Superlux are always looking to better our product offer to our customers and are actively involved in researching and engaging the worlds greater lighting community which continually feeds back into our product development efforts.

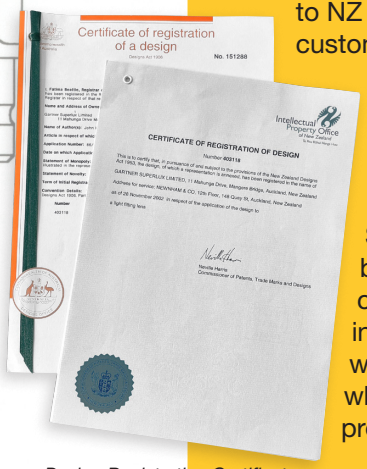

Design Registration Certificates

Rigorous In House Testing

Our In-House testing facilities allow us to be assured that our products are ready for release into the NZ market place. Light output, heat testing and stress testing are some of the many test carried out.

Products are not only tested before initial release, we continually test and improve them as they develop within the market place too.

Support New Zealand

We encourage you to support the New Zealand electrical industry and New Zealand owned and operated manufacturing in the face of world wide commodity supply. Support ensures the ongoing innovation by New Zealanders for New Zealanders, supporting our local economy and people, allowing us to provide products made better for you.

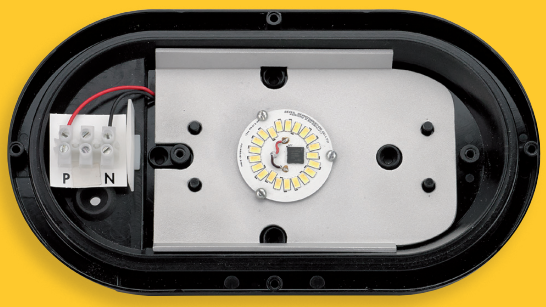







superlux
we engineer light

Superlux

How it all started - Company History

Emil Heimgartner, a trained production engineer, emigrated from Switzerland to New Zealand in 1950. He arrived at a time in New Zealands history when production engineering was in its infancy.

Established as Gartner Engineering Ltd, Emil provided manufacturing services from a property in Princess St, Onehunga.

An increasing design aware public saw rapid industrial growth in the late 1960's. Gartner products stood out for their reliable quality and highly competitive pricing, all as a result of the 'Swiss' principles of attention to design, detail and productivity.

Demand for Gartner products meant the Onehunga facility was outgrown by the late 1960's and land was secured in nearby Mangere Bridge. The current premises started to emerge in 1972. Sons Mark and John Heimgartner had training as manufacturing technologists since 1970. It was not long before new technologies were imported to produce precise automotive parts, electrical products, hydraulic equipment and architectural builders' hardware including the well known Arrow brand hydraulic door closers.

With well over 60 years in the New Zealand manufacturing industry you can be assured the passion for design and manufacturing continues in all Superlux products of which are innovated and designed here in New Zealand and manufactured locally and overseas. This passion has been passed onto a new generation; Jennifer Heimgartner now part of the design and management team.

Important to the success of Superlux has been the strong work ethic of dedicated staff, many who have remained with the company for close to 30 years. We thank our staff and long standing customers for their continued support.

John Heimgartner

Jennifer Heimgartner

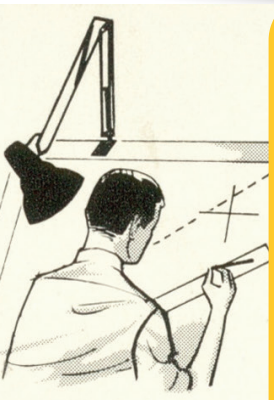



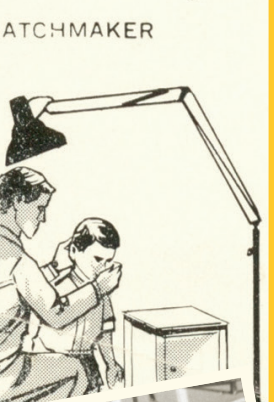

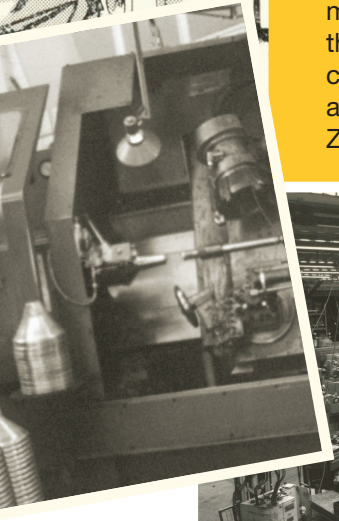











Visual Index


12


13

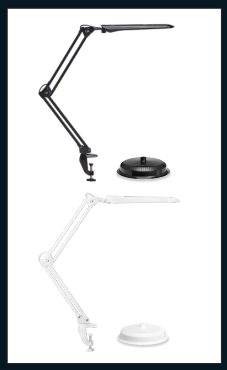
14

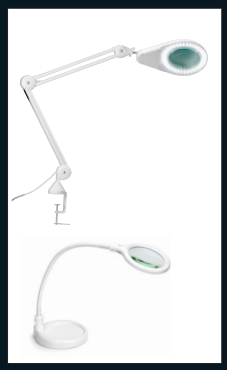
15

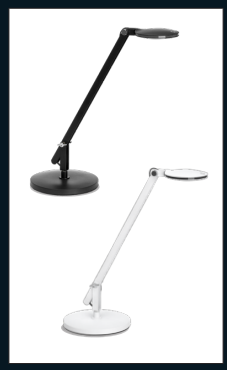
16

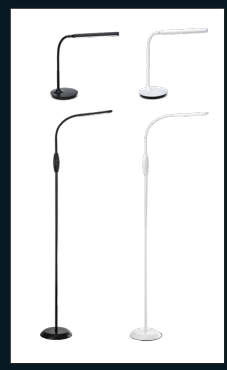
17


18


19


20


21


22


23

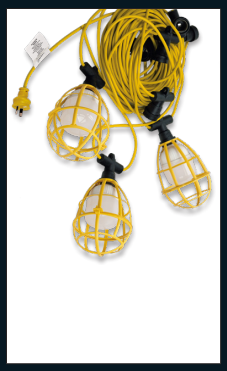
24


25

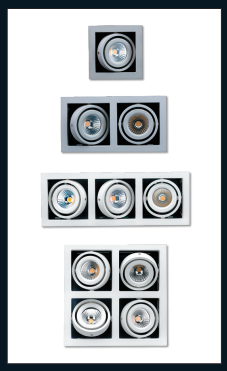
26


27


28


29


30


31


32


33


34


35


36


37


38

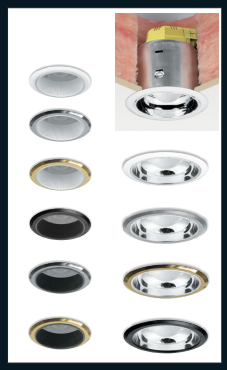
39


40

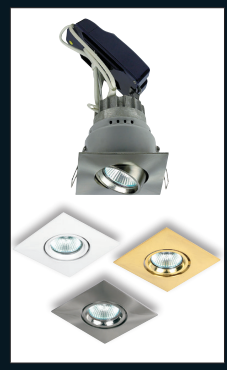
41

Visual Index


42


43


44


45


46


47


48


49


50

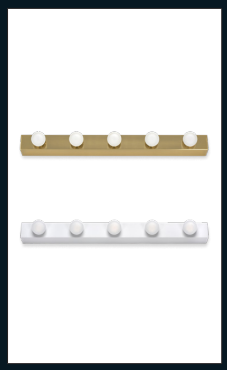
51

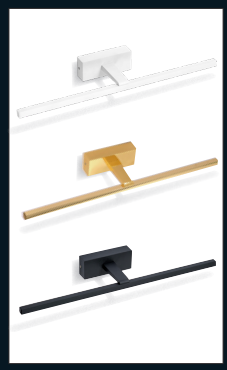
52

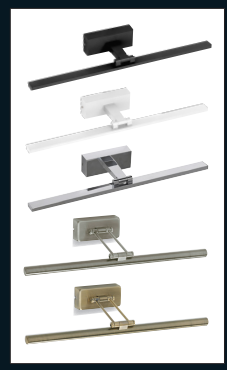
53


54

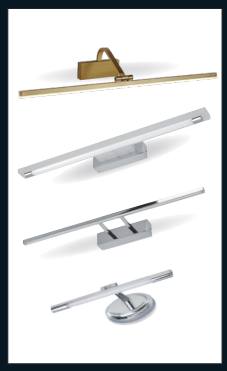
55


56


57


58


59


60


61


62


63


64


65

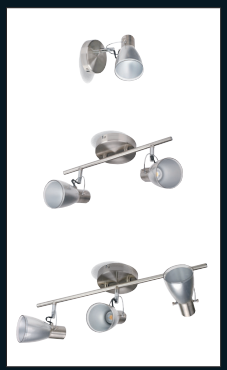
66


67


68

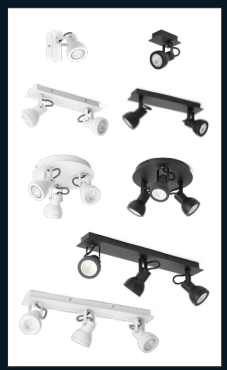
69


70


71

Visual Index


72


73

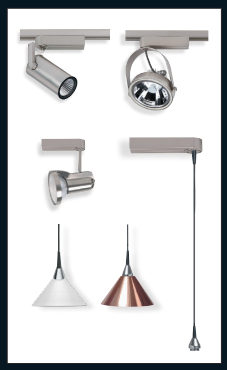
74


75


76/77

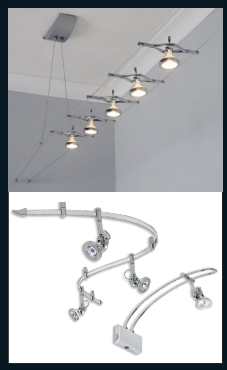
78


79


80


81


82

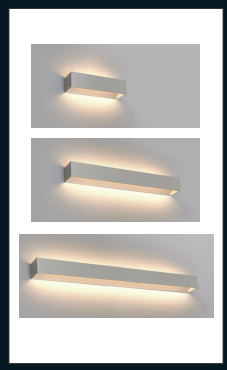
83


84

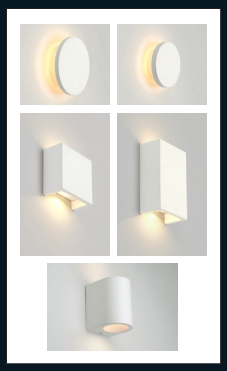
85


86


87

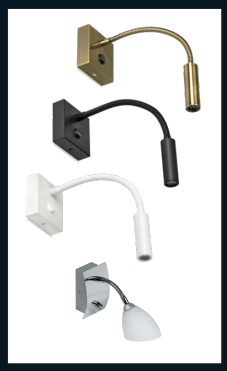
88


89


90


91


92


93

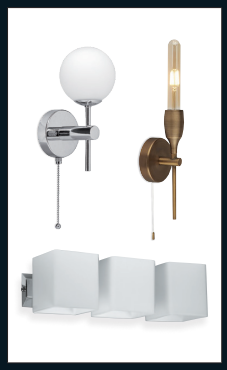
94


95


96


97

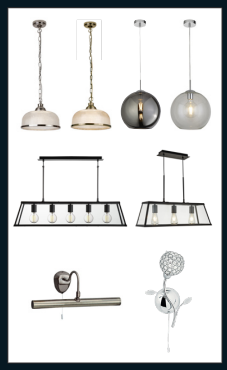
98


99


100


101


102

Visual Index

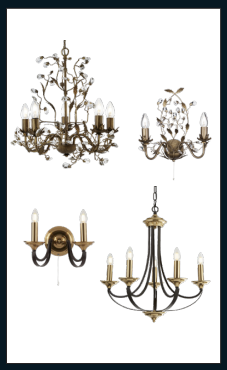
103


104


105

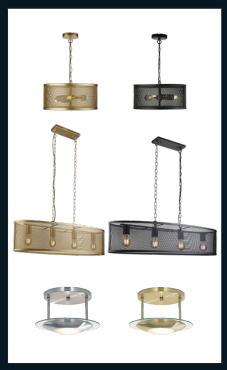
106


107

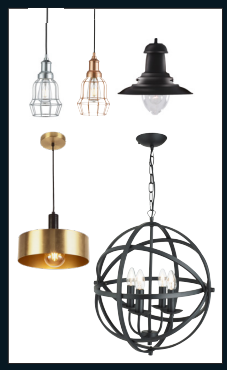
108


109


110

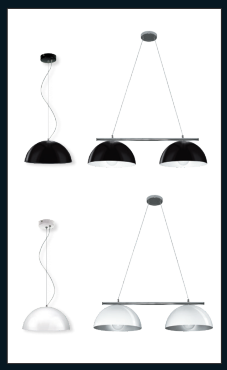
111

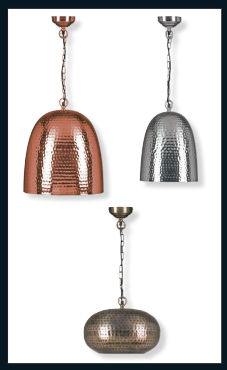
112


113

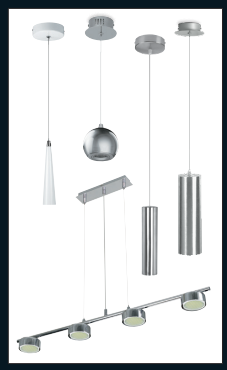
114

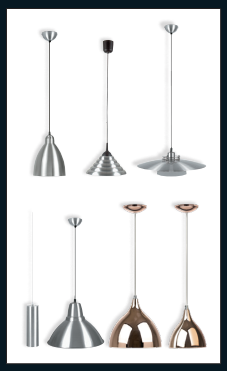
115


116


117

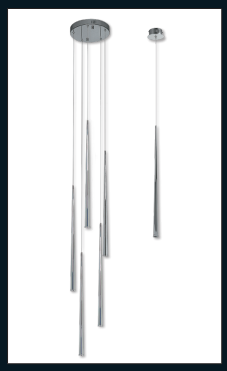
118


119


120

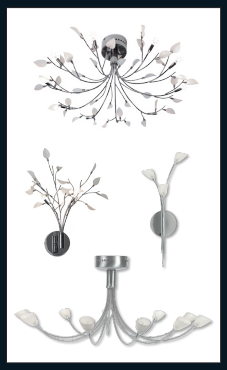
121


122

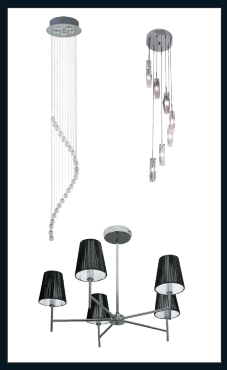
123

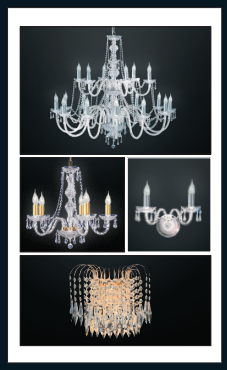
124


125


126

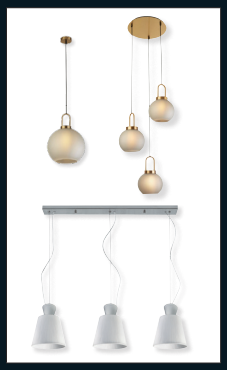
127


128


129


130


131


132

Visual Index


133


134


135


136


137/138


139


140

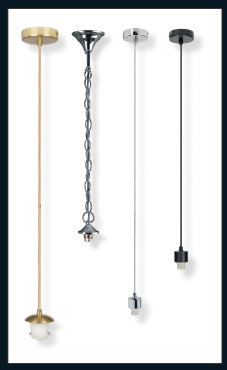
141

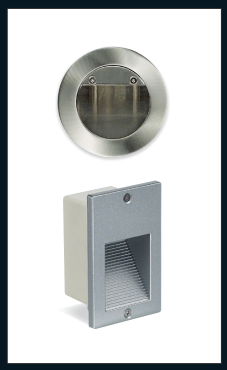
141


143


144


145


146

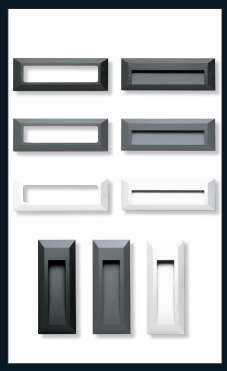
147

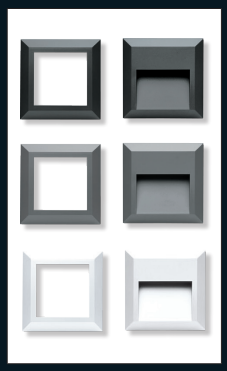
148

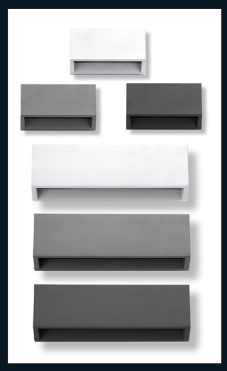
149

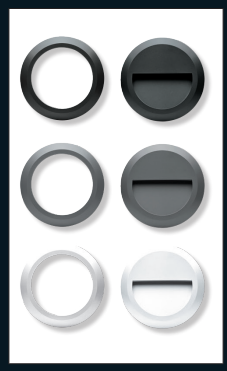
150


151


152/153


154/155

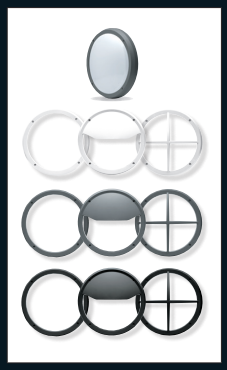
156


157


158


159


160

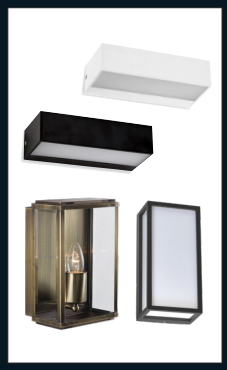
161


162


163



164


165

Visual Index


166/167


168


169


170


171

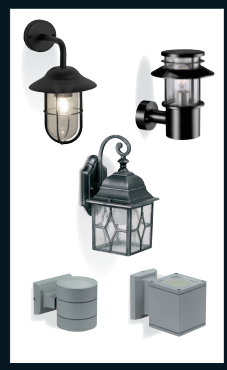
172


173


174


175


176


177


178

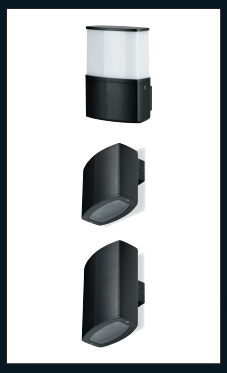
179


180


181


182

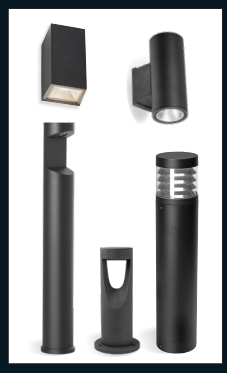
183


184

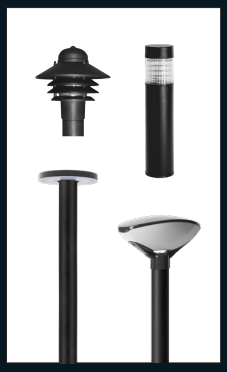
185


186

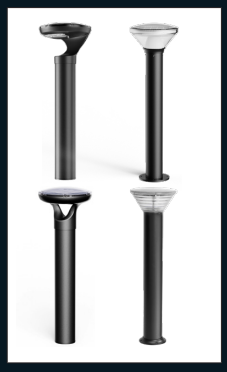
187

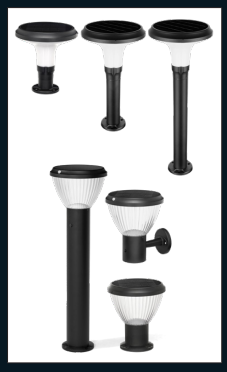
188

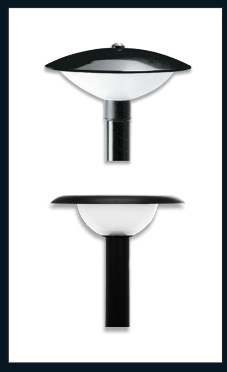
189

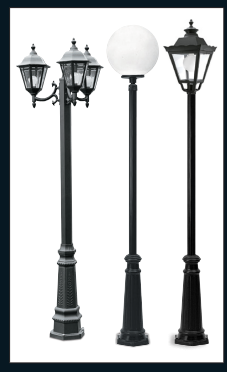
190


191


192


193

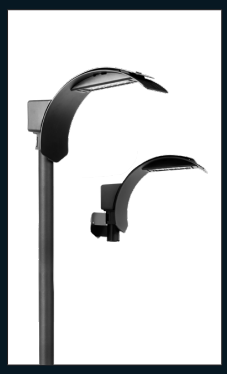
194


195


196

Visual Index

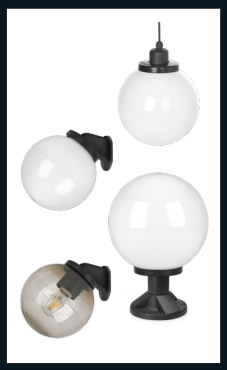
197

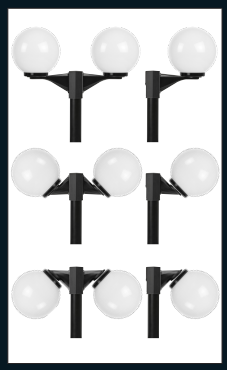
198

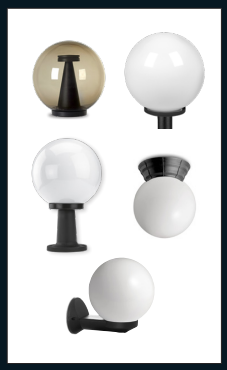
199

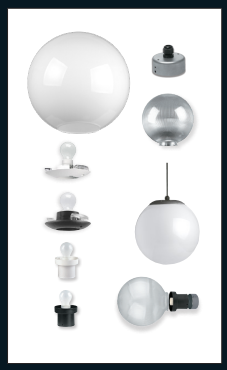
200/201


201

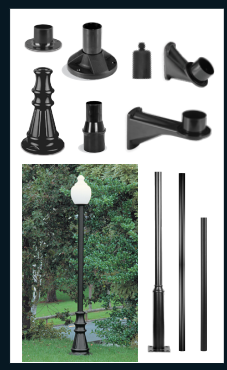
202/203


204

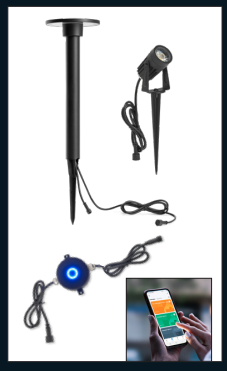
205

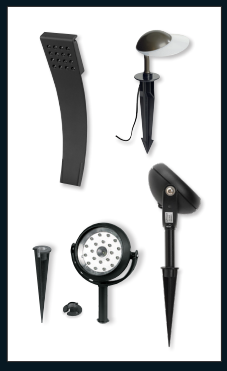
206


207


208


209


210


211


212


213


214/215

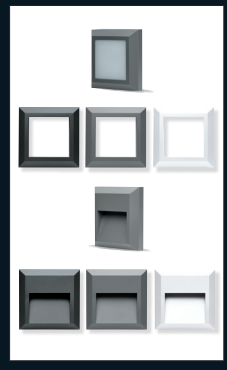
216


217


218


219


220


221


222


223


224


225


226


227


228

Visual Index


229


230


231


232


233


234


235


236


237


238


239


240


241


242


243


244


245


246/247

1. FULL TERMS & CONDITIONS OF SALE

are available on request.

2. GENERAL

Goods are sold on the condition that the reseller is familiar with the technical information contained in this catalogue,relevant electrical codes of practice, wiring rules and is suitably knowledgeable with this type of lighting to make the correct product choice.

3. RECEIPT OF GOODS

Gartner Superlux Limited is responsible for goods only up until they are received into your care. It is important that any external damage to packaging is recorded on the courier documentation when signing. It will be the responsibility of the customer to check deliveries for damages and notify Gartner Superlux Ltd within 48 hours of any damage caused by delivery for us to make claims against the carrier. Non-delivery – any shipments that fail to arrive or have items missing must be reported within 5 working days. Once goods have left your store no claims for missing goods can be accepted.

4. CUTTING OF HOLES

For reasons beyond our control, specifications may change without notice. As such, the cutting of holes or other installation / constructional work prior to receiving product is entirely at the purchaser's risk.

5. SPLIT DELIVERIES

For reasons beyond our control, specifications may change regularly. As such, split deliveries run the risk of model changes and / or supply issues and are entirely at the purchaser's risk.

6. WARRANTY GUARANTEE

We put considerable effort into ensuring our products are made to meet or exceed the relevant standards. Should a product fail due to defects in materials or workmanship, we will either repair or replace it at our discretion. If this is not possible then we will offer an alternative product as replacement. The Warranty does not cover products damaged due to wrong selection, misuse or incorrect installation. Lighting fixtures carry a minimum 12 months guarantee from date of despatch. Gartner Superlux Limited accepts no claims for indirect or consequential damages whether based on contract, tort or any other legal theory.

E & OE: Errors and Omissions Excepted.

Equipoise™ Lamps

Superlux Equipoise™ lamps, famous for their precision engineering guaranteed easy to move and to stay where you put it

- Shade switches are incorporated in all Equipoise™ models
- Availiable in black or white • Approval number NSW28333

LARGE



LSB-BL



LSB-WH

MEDIUM



LSA-BL



LSA-WH

METAL COPY HOLDERS

Made in NZ



CH-DATA-BL



CH-STD-IV

E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

LED
SBL-18EWW



- 1730 total lm
- 18 Watts • 3,000K • CRI>80 • 160° Beam

E27 | LED ONLY | MAX. 19W | AS-NZ Approved | LED REPLACEABLE

LSB

- Large size Equipoise™, 1065mm reach
- Comes complete with G clamp base
- Maximum clamping width 58mm
- Supplied with 1.5 metre cord and plug
- Extra base options
  LSM - 1, 3, 4, 7, 8, 9, 11, 12, 14, 15, 16

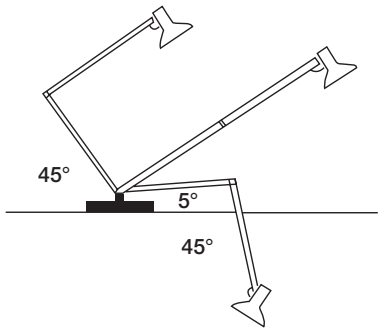

E27 | LED ONLY | MAX. 19W | AS-NZ Approved | LED REPLACEABLE

LSA

- Medium size Equipoise™, 800mm reach
- Comes complete with heavy table base
- Supplied with 2 metre cord and plug
- Extra base options:
  LSM - 1, 2, 3, 4, 8, 9, 11, 12, 14

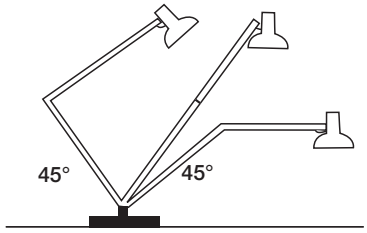

Designed with copyreading ergonomics, increased comfort and efficiency

CH-DATA

- B4 paper
- Black
- Sturdy all metal construction
- 380mm x 270mm

CH-STD-IV

- A4 paper
- Ivory, sturdy all metal construction (supplied with clamp base)
- Max load 300 grams

Equipoise™ Base Fittings

Equipoise™ accessories for a variety of uses









LSM-1
- Swivel G-clamp for inclined surfaces and vertical edges up to 48mm thickness (for example, drawing boards)

LSM-2
- Plain G-clamp for clamping onto horizontal surfaces only. Up to 48mm thickness

LSM-3H
- Extra heavy duty wall bracket
- 56mmW x 70mmH x 84mm depth

LSM-4
- Bracket for horizontal surfaces
- Base 66mmØ x 50mmH

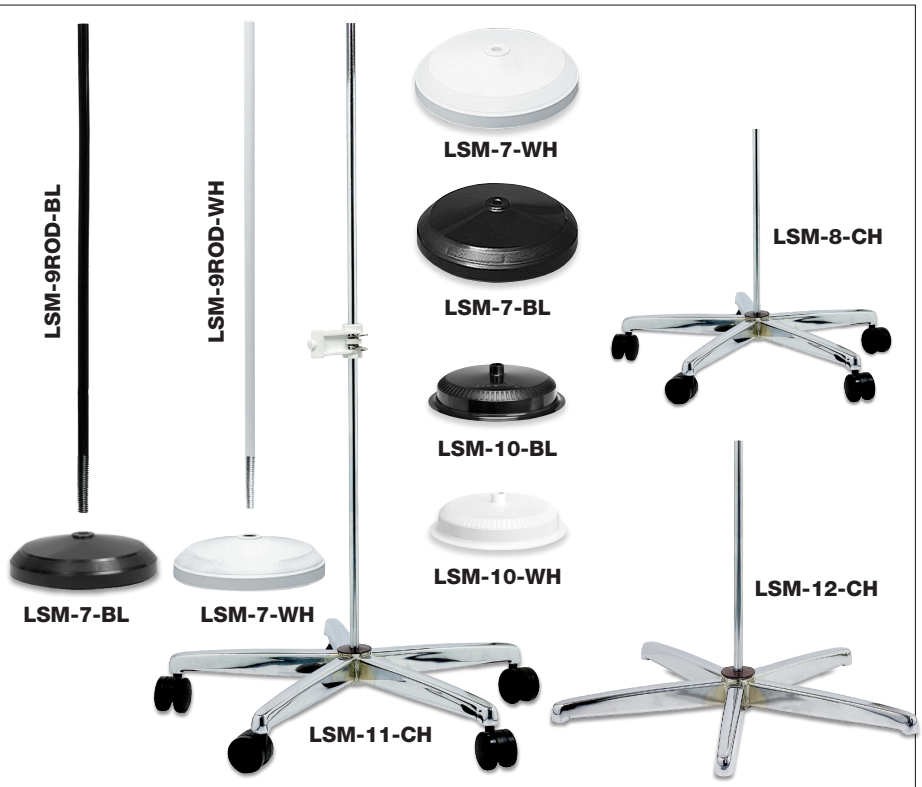

LSM-7
- Heavy table base for LSB, LSA
- 220mmØ

LSM-8-CH
- Five castor floor stand
- Overall height 700mm

LSM-9ROD
- Low cost solution for floor mounting
- Must be used with LSM-7 Heavy base
- Suitable for LSA, LSB, LSG and LST models
- 220mmØ x 730mmH

LSM-10
- Heavy table base for LSG
- 175mmØ base

LSM-11
- Five castor overall height 1220mm and quick release adjustable height bracket
- 660mmØ base

LSM-12
- Floor stand with 300mm rod, overall height 340mm, 660mmØ
- Suitable for LSB and LSX lamps

TASK	LSM 1	LSM 2	LSM 3H	LSM 4	LSM 7	LSM 8	LSM 9	LSM 10	LSM 11	LSM 12
LSA	•	•	•	•	Included	•	•		•	•
LSB	•	Included	•	•	•	•	•		•	•
LSG	•	Included	•	•		•	•	•	•	•
LST		•	•	•	Included	•	•		•	•
LSX		Included	•	•		•			•	•

CLINICAL	LSM 2	LSM 3H	LSM 4	LSM 11	LSM 14	LSM 16
LSD	•	•	•	•	•	•
LSP	•	•	•	•	•	•
LSS	•	•	•	•	•	•

Equipoise™ LED Lamps

Superlux LED Equipoise™ lamps with a generous range of movement for desks, laboratories, workshops, hobbyists and more





INTEGRAL LED
• 500 total lm • Dimmable • 80° Beam
• 8 Watts • 4,000K • CRI>80

LSG
- 960mm reach
- Touch switch on top of head
- 3 x light level settings
- 4,000K, neutral white
- Metal frame with ABS head
- Complete with G-Clamp and 1.8m cable with plug-in power supply
- G-Clamp fits up to 48mm thickness horizontal surfaces
- Fits other Equipoise™ base mount options, LSM-1, LSM-3H, LSM-4, LSM-10, LSM-8, LSM-9ROD, LSM-11, LSM-12

LSM-10
- Optional heavy table base for LSG
- 175mmØ
- Purchase separately



Easy access touch switch on head



960mm reach when fully extended

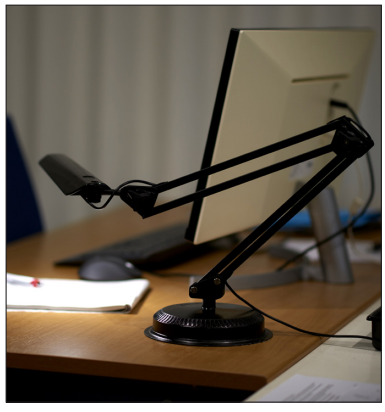

OTHER MOUNTING OPTIONS *(Purchase Separately)*



Table Base LSM-10 | **Wall Bracket LSM-3H** | **Floor Stand LSM-12** | **Floor Stand LSM-7 + LSM-9ROD**

Specialist Magnifying Equipoise™

High brightness LED, safe and cool to touch

LARGE MAGNIFYING EQUIPOISE™



INTEGRAL LED
- 500 total lm
- 10 Watts • 6,000K • CRI>80

LSX
- LED Magnifying Equipoise™ lamp
- 6 diopter magnification
- 1200mm reach
- 120mmØ magnifying lens
- Table clamp included
- Clamping width 14mm to 73mm
- Fits other Equipoise™ base options LSM-3H, 4, 8, 11, 12
- Approved for sale in Australia and New Zealand: NSW28333
- Supplied with 1.7 metre power cord
- Switch on head

FLOOR STAND OPTION



LSM-12
340mm height x 660mmØ base

MAGNIFYING LED LAMP



INTEGRAL LED
- 570 total lm
- 6 Watts • 5,700K • CRI>80

LSY
- Elegant professional Magnifying Lamp
- 6 Watt LED shadowless design
- 3 diopter magnification
- Flexible stem ensuring ease of positioning
- 95mmØ magnifiying lens
- 450mm reach
- Easy to access switch on top of lamp head
- AS/NZS Safety Standard Approved
- Both table clamp and table base included
- 360° adjustment at base
- Supplied with 1.5 metre cable and plug-in extra low voltage power supply

Dimmable LED Lamps

Superlux LED lamps with a generous range of movement, light can be easily placed where needed

EQUIPOISE™ SOLO



Touch switch adjustable - 3 light settings

Easy to adjust with large range of movement 500mm height and reach

INTEGRAL LED

• 540 total lm • Dimmable • 75° Beam
• 6 Watts • 4,000K • CRI>80

LST

- Touch switch dimmable – 3 light levels
- 1500 lux @ 500mm height
- Maximum height 500mmL
- Complete with heavy table base and 2.2 metre cable with plug-in extra low voltage power supply
- Lamp head is tiltable up and down & side to side
- Lamp stem moves through 90°
- Fits other Equipoise™ base mount options, LSM-2, LSM-3H, LSM-4, LSM-7 + LSM-9ROD

OPTIONAL WALL BRACKET



LSM-3H





LED Table and Floor Lamps

Easy manoeuvrable flexible stems
- Easy to access touch switches

KORA TABLE LAMP



INTEGRAL LED
- 320 total lm • Dimmable
- 5 Watts • 4,000K • CRI>80

TLED19
Kora Table lamp
- Easy to adjust flexible stem
- Touch switch 3 light levels
- Supplied with 1.8 metre cable and plug-in extra low voltage power supply
- 380mm height as pictured



NOVA FLOOR LAMP

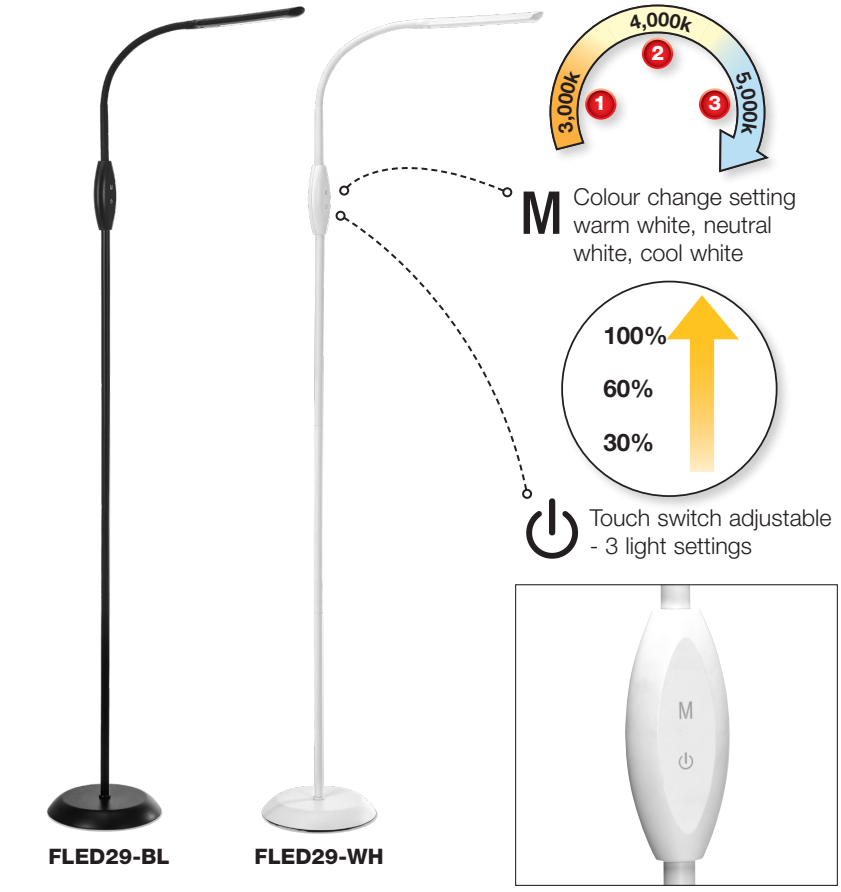

INTEGRAL LED
- 600 total lm • Dimmable
- 6 Watts • Variable CT • CRI>80

FLED29
Nova Floor lamp
- Fexible stem near head
- Dimmable and colour temperature adjustable
- Supplied with 1.7 metre cable and plug-in extra low voltage power supply
- Maximum 1450mm height



Limited Edition Table & Floor Lamps

Product information available at superlux.co.nz, superlux.com.au
simply type in the product code in the search box

TABLE LAMPS



TL2143



AU1533-CC (Pair)
AU1533-CC-1 (Single)



AU5481-GO



AU5481-SI



AU700405

TABLE & FLOOR LAMPS



UL2149-CH



UL6021-AB

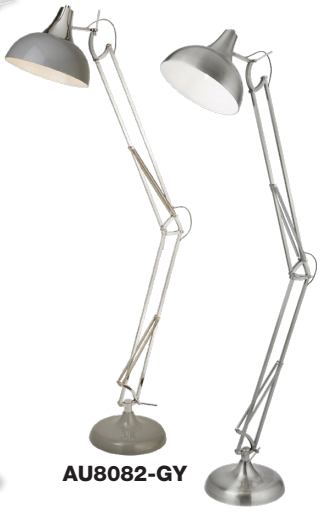

AU8082-GY
AU8082-SS



AU14380



AU5430-SS



AU5430-CC



AU5430-AB



AU3573-CC

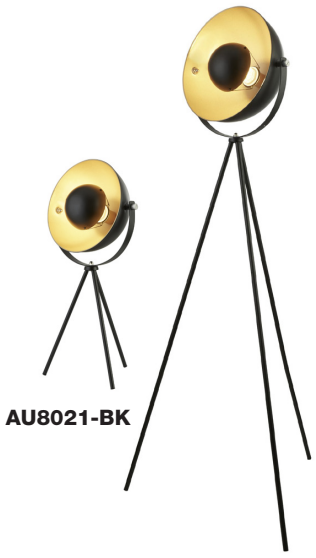

AU8021-BK
AU8022-BK



AU2111-CC
AU2112-CC



AU700186
AU700187



AU2812-RU
AU2813-RU

Arlo LED Table & Floor Lamps

Touch switch dimmable – 3 light levels
- Each spot head has a 5 Watt integral LED and is individually switched
- Heads are tiltable 90° degrees and rotates 350° degrees


FLED36-BL



TLED36-WH

ARLO TABLE & FLOOR LAMPS


Touch switch located on lamp heads



Touch switch adjustable 3 light settings


TLED36-BL


TLED36-WH

FLED36-BL

FLED36-WH

INTEGRAL LED
• 450 total lm • Dimmable • 75° Beam
• 5 Watts • 3,000K • CRI>80

TLED36
- 460mmH x 160mmØ base
- 1.8m supply cord
- Available in black or white

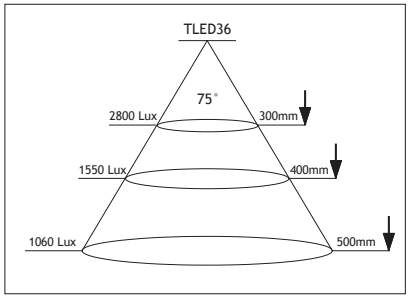

INTEGRAL LED
• 900 total lm • Dimmable • 75° Beam
• 2 x 5 Watts • 3,000K • CRI>80

FLED36
- 1.4 metres H x 230mmØ base
- 1.8m supply cord
- Available in black or white

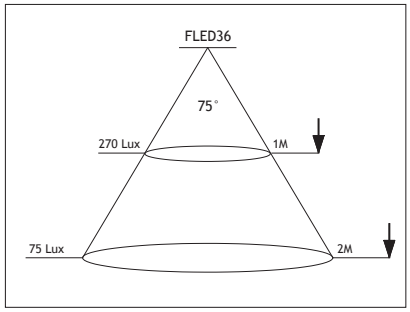

LED Precision Examination Lamps

Colour truer to life CRI 93

220V-240V | EEI Complies | Manufactured in Switzerland

18 Watt



LSH15-473
Purchase base mounts separately.
Wall, table and floor
mounting options available.

- 40,000 Lux at 0.5m
- Illumination area 170mm diameter
- CRI 93 high quality colour rendering
- Switching on top of head for colour changing and 5 level dimming
- Flexible and stable arm

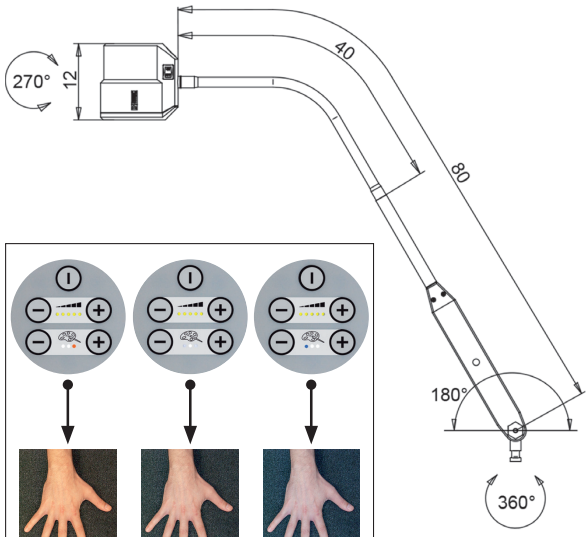

Mixing LEDs of different colours is a great innovation in the domain of medical examination. The light colour (Kelvin) can be modified according to the type of procedure.
The user can select the optimum lighting for the examination depending on the skin area and the type of tissue or wound. Adjustments can be made from a simple and clear control unit directly on the head of the lamp. It is also possible to select the luminous intensity and personalize it using five dimming levels.

Three Colour Temperatures:

3,300K (warm white) Ideal for different types of skin examination

3,800K (neutral white) Ideal for general examinations

4,400K (cold white) Ideal for the recognition of different vessels – for post operative treatment and small interventions.

LED MODEL – 4,400K

13 Watt



LSH15-758
Purchase base mounts separately.
Wall, table and floor
mounting options available.

- Luminaire head can turn 280°
- Ergonomic handle & sealed construction
- CRI 93 high quality colour rendering
- Illumination field is 180mm diameter
- Switch on arm
- 50,000 Lux at 0.5m
- 4,400K colour temperature
- 20° beam

LSM-8-HOS
Five castor floor stand
Overall height 700mm

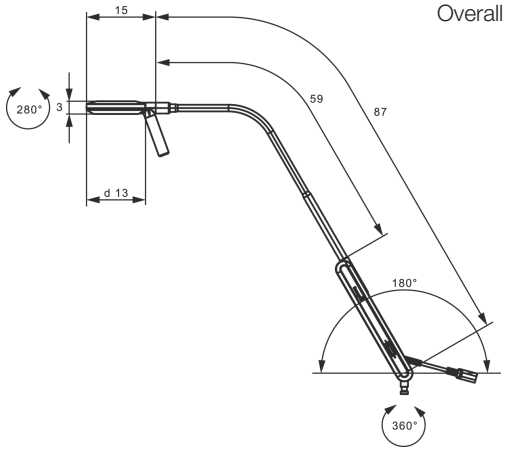

Speciality Hospital Lamps

Metal and polycarbonate construction
- 16mmØ mounting stem with optional bases
- Purchase base mounts separately

Manufactured in Switzerland

220V-240V

LED BEDSIDE LAMP WITH NIGHT LIGHT

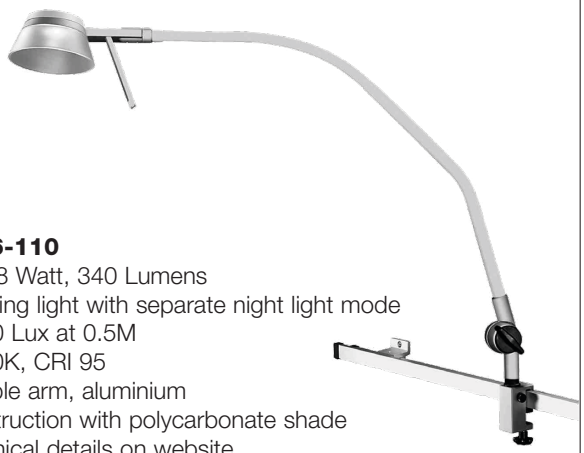

LSH16-110
- LED 8 Watt, 340 Lumens
- Reading light with separate night light mode
- 1,000 Lux at 0.5M
- 3,000K, CRI 95
- Flexible arm, aluminium construction with polycarbonate shade
- Technical details on website

HOSPITAL INSPECTION LAMP

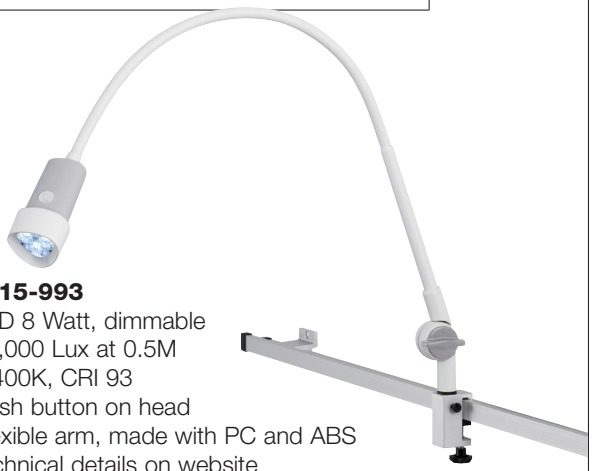

LSH15-993
- LED 8 Watt, dimmable
- 30,000 Lux at 0.5M
- 4,400K, CRI 93
- Push button on head
- Flexible arm, made with PC and ABS
- Technical details on website

Optional Lamp Bases - for 16mm stem hospital lamps

RAIL BASES

Illustration of assembly with one moveable bracket (order separately)

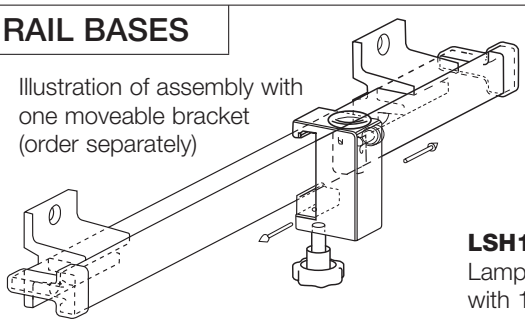



LSH13-269
Lamp rail bracket with 16mmØ stem hole

LSH13-505
Horizontal mounting rail
- Complete with 2 wall brackets
- 1000mm overall length



WALL BASES

LSH13-363
400mm extension for use with LSH 13-231 wall bracket

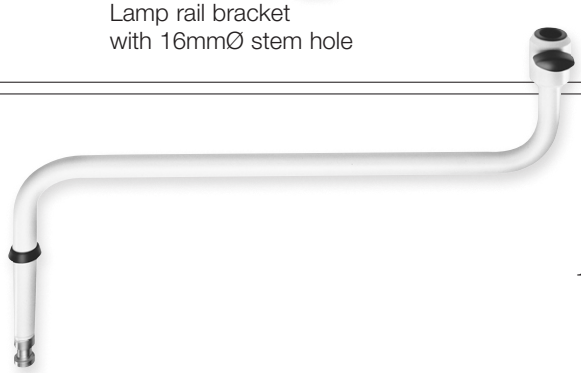

LSH13-231
Wall bracket with 16mmØ stem hole



TABLE CLAMP BASE



LSH14-228
- Clamps up to 70mm
- For LSH lamps with 16mmØ stem

FLOOR BASE

LSM-8-HOS
- For LSH lamps with 16mmØ stem
- Five castors for stability
- Overall height 700mm



LED Precision Clinical Lamps

Swiss made quality clinical LED lighting maintenance free

Manufactured in Switzerland

220V-240V | 21 Watt | EEI Complies

- Thanks to the long life LEDs no light source replacement is required for the whole service life, 30,000 hours
- Made from PC and ABS
- Scratch proof PMMA acrylic glass with an ABR-GL abrasion proof coating on the lens
- 60,000 Lux at 0.5m
- 2 colour temperature selectable 3,500K or 4,500K
- Touch panel switching on head
- 4 x dimming levels
- Head rotatable 360° turnover axis
- Internal spring balancing
- CRI 95 high quality colour rendering
- Illumination field 210mm diameter

UNIVERSAL MOUNT



LSH15-451

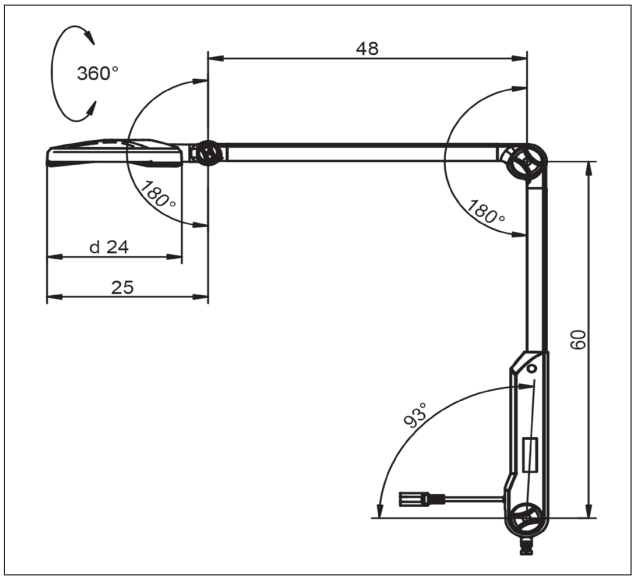

CEILING MOUNT



LSH15-450

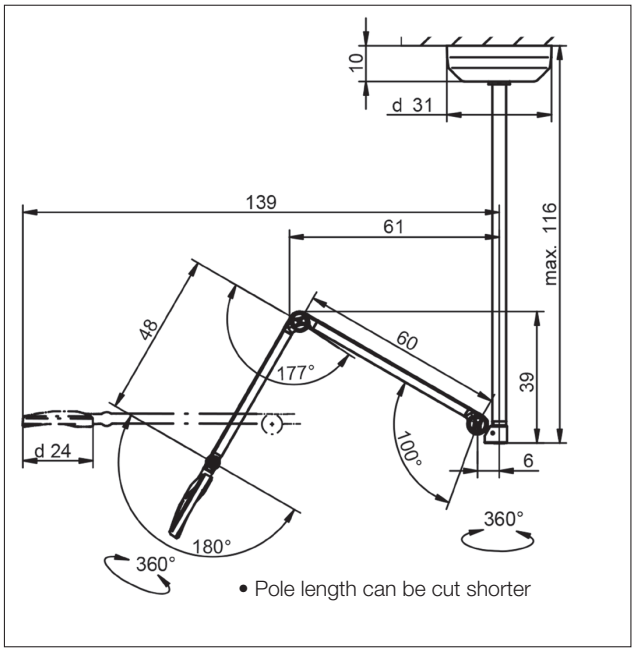

Halogen version available LSH14-661

Clinical Equipoise™ Lamps

Maximum downward movement when mounted on wall or ceiling brackets

• Products on this page supplied in white paint finish • Clinical frames have a backstop to prevent damage to walls • Complies with: AS60598.2.4:2019 and AS/NZS60598-1:2017 + A1



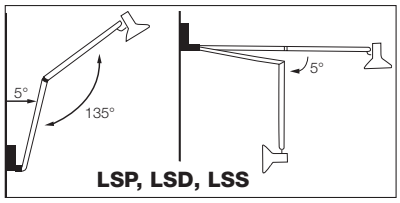

LSP, LSD, LSS

220V-240V Made in NZ

• **Base options:** LSM-2, 3H, 4, 8, 11, 12, 14, 16

E27 | LED ONLY | MAX. 19W | LED REPLACEABLE

LSD

• Superlux lamp GLS9-EWW
• Equipoise™ shade 188mmØ, 1065mm Reach

E27 | LED ONLY | MAX. 19W | 0.3m | LED REPLACEABLE

LSS

Examination lamp

• Supplied with 9 Watt LED, high colour rendering lamp CRI90, 15° beam, 4,000K, 900 lumens
• 12200Lux @ 0.5 metres
• 6100Lux @ 0.7 metres
• Shade 100mmØ

PAR 38 | LED ONLY | MAX. 19W | E27 | LED REPLACEABLE

LSP

• Suits PAR38-HPLED-WW, 5,200Lux @1Metre and 24° beam angle
• Also suitable lamp SBL-18EWW
• Shade 135mmØ, 1065mm reach

Wall & ceiling mounting bracket options



LSM-14 Wall bracket, adjustable 560mm height movement. Quick release sliding bracket.



Example: Mounted on **LSM-16**
Photo Courtesy of The Intensive care unit, Waikato Hospital, Hamilton.



LSM-3H

• Extra heavy duty wall bracket

LSM-16

• Ceiling mount, 360° overhead mount with extension
• 440mmL x 630mmH

Temporary Lighting Systems

For indoor and outdoor use, construction sites, parking lots, walkways, wooded areas - wherever temporary lighting is required.

• 30 metre overall length • Lamp holders permanently moulded onto cable 3 metres apart • Rigid mount eyelets for hooks or wire to make hanging easy • To comply with AS/NZS3012 the centurion must be mounted at least 2.5 metres from the floor/ground/platform unless mounted directly below ceiling • Approval number - NSW22910

CENTURION



E27

LED
GLS-9EWW



• 820 total lm
• 9 Watts • 3,000K • CRI>80 • 240° Beam

LED
SBL-18EDL



• 1870 total lm
• 18 Watts • 6,000K • CRI>80 • 160° Beam

CENT10

E27 10x MAX. 19W IP 23 LED REPLACEABLE

CAGE

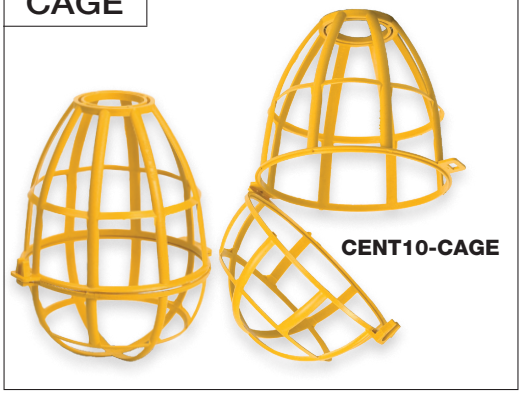

CENT10-CAGE

• Replacement cages can be purchased separately
• The patented cage snaps on fitting to enable quick assembly



Picture showing **CENT10-CAGE** on standard batten holder using shade rings **Q940** & **Q945**. Can also be mounted onto cordsets with 29mmØ mounting

Maxim Temporary Lighting System

For indoor and outdoor use, construction sites, parking lots, walkways, wooded areas - wherever temporary lighting is required



MAXIM10

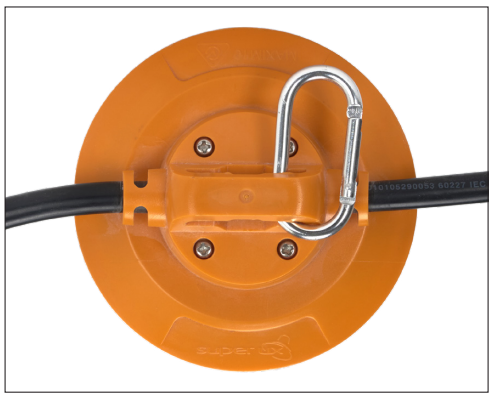



INTEGRAL LED

- 12000 total lm • 90° Beam
- 10x10 Watts • 5,000K • CRI>80

IP 65 | 10x | 10 Watt

MAXIM10

- Temporary protected LED string lighting system tested to AS/NZS 60598.2:20:2018
- UV protected
- 30 metre of heavy duty cable 2.5mm^2 conductors
- LED light heads permanently moulded onto cable 3 metres apart
- Each light head has 1200 Lumens light output
- 30 metre overall length
- Supplied with carabiners for quick & easy installation
- To comply with AS/NZS3012 the MAXIM must be mounted at least 2.5 metres from the floor/ground/platform unless mounted directly below ceiling

LED Frame Lights

Double insulated construction

• Recessed gimble frame lights • Integral 6.5W LED module similar light output to a 50 Watt halogen downlight
• Full metal case provides forward heat-sinking and closed IC rating • Integral driver



LDL-GIM1-SI Dimmable



LDL-GIM3-SI Dimmable





LDL-GIM2-SI Dimmable

LDL-GIM4-SI



LDL-GIM1-WH Dimmable



LDL-GIM3-WH Dimmable





LDL-GIM2-WH Dimmable

LDL-GIM4-WH

220V-240V

INTEGRAL LED
• 540 total lm • Dimmable • 30° Beam
• 6 Watts • 3,000K • CRI>80

LDL-GIM1

• Flange 110mm Sq

INTEGRAL LED
• 1080 total lm • Dimmable • 30° Beam
• 2 x 6 Watts • 3,000K • CRI>80

LDL-GIM2

• Flange 203mmL x 110mmW

INTEGRAL LED
• 1620 total lm • Dimmable • 30° Beam
• 3 x 6 Watts • 3,000K • CRI>80

LDL-GIM3

• Flange 300mmL x 110mmW

INTEGRAL LED
• 2160 total lm • 30° Beam
• 4 x 6 Watts • 3,000K • CRI>80

LDL-GIM4

• Flange 210mm Sq



30° half light beam angle

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDL-GIM1	IC	Closed	cover over -non flammable	Yes	95mm x 95mm	150mm	20mm
LDL-GIM2	IC	Closed	cover over -non flammable	Yes	95mm x 190mm	150mm	20mm
LDL-GIM3	IC	Closed	cover over -non flammable	Yes	95mm x 285mm	150mm	20mm
LDL-GIM4	IC	Closed	cover over -non flammable	Yes	195mm x 195mm	150mm	20mm

Multiform LED Downlights

NEW GOLD

Gimbal fully adjustable tilt in any direction

• SAA safety approved driver • Triac Dimmable • Available in black or white • Purchase downlights and plates separately

MULTI FORM DOWNLIGHTS





LDL-TLT-BL



LDL-TLT-WH



LDL-TLT-GD

INTEGRAL LED

• 580 total lm • Dimmable • 40° Beam
• 8 Watts • 3,000K • CRI>80

IP 44 | IC-F

LDL-TLT

- 95mmØ
- 40° half light beam angle
- Use with or without plates
- Supplied with dimmable driver

MULTI FORM PLATES



LDL-PLATE1-BL + LDL-TLT-BL



LDL-PLATE2-BL + LDL-TLT-BL x 2



LDL-PLATE3-BL + LDL-TLT-BL x 3



LDL-PLATE1-WH + LDL-TLT-WH



LDL-PLATE2-WH + LDL-TLT-WH x 2



LDL-PLATE3-WH + LDL-TLT-WH x 3



LDL-PLATE1-GD + LDL-TLT-GD



LDL-PLATE2-GD + LDL-TLT-GD x 2



LDL-PLATE3-GD + LDL-TLT-GD x 3

LDL-PLATE1
• 130mm x 130mm

LDL-PLATE2
• 235mm x 130mm

LDL-PLATE3
• 340mm x 130mm

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDL-TLT	IC-F	Closed	Cover over	Yes	85mmØ	100mm	20mm
LDL-PLATE1	IC-F	Closed	Cover over	Yes	90mmØ	100mm	20mm
LDL-PLATE2	IC-F	Closed	Cover over	Yes	2 x 90mmØ	100mm	20mm
LDL-PLATE3	IC-F	Closed	Cover over	Yes	3 x 90mmØ	100mm	20mm
LDL-PLATE4*	IC-F	Closed	Cover over	Yes	4 x 90mmØ	100mm	20mm

*LDL-PLATE4 • Available in black or white only • 240mm x 240mm

Low Profile LED CCT Downlights

Colour selectable downlights choose at the flick of a switch
• 3000K, 4000K, 5700K colour temparature • Triac Dimmable • Building insulation may cover driver

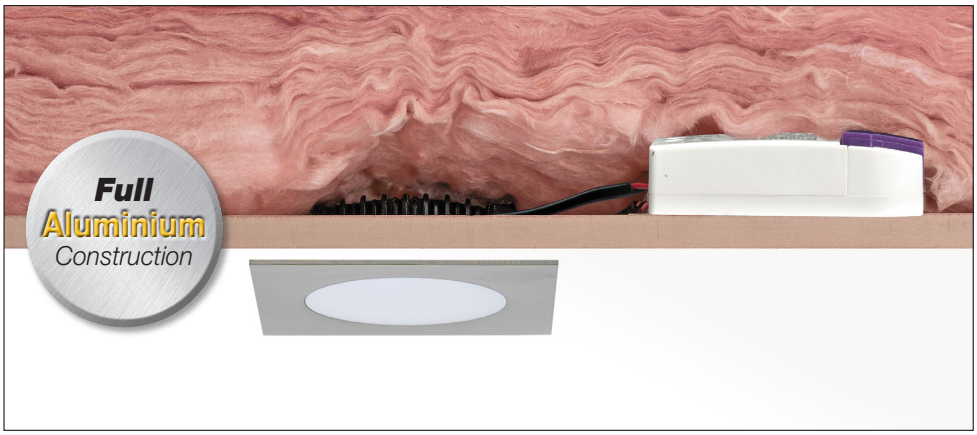

INTEGRAL LED
• 830 total lm • Dimmable • 90° Beam
• 10 Watts • 3K, 4K, 5.7K • CRI>83

220V-240V | IP 44 | IC-4

LDE90S
Square Trim
Low profile 30mm height
LED downlight

- 10 Watt LED chip
- 90° degree light beam
- Full aluminium construction body and trim
- Flange size 104mm square
- Easy large looping terminal block on driver for quick and easy installation
- SAA safety approved driver

SQUARE LED 10 WATT

Dimmable





- Plug and socket between driver and downlight. Easy to plug and unplug light before/after painting etc

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDE90S	IC-4	Closed	cover over	Yes	90mm	65mm	20mm

Low Profile LED CCT Downlights

Colour selectable downlights choose at the flick of a switch
• 3000K, 4000K, 5700K colour temparature • Triac Dimmable • Building insulation may cover fixture and driver



INTEGRAL LED
• 830 total lm • Dimmable • 90° Beam
• 10 Watts • 3K, 4K, 5.7K • CRI>83

220V-240V | IP 44 | IC-4

LDE90
Round Trim
Low profile 30mm height
LED downlight
- 10 Watt LED chip
- 90° degree light beam
- Full aluminium construction body & trim
- Flange size 104mmØ
- Easy large looping terminal block on driver for quick and easy installation
- SAA safety approved driver

ROUND LED 10 WATT

Dimmable

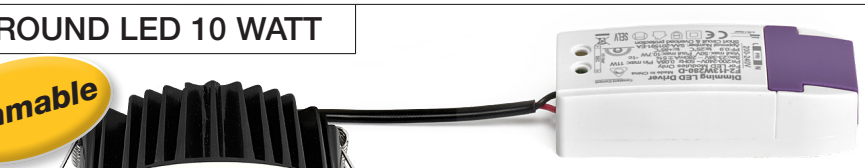

LDE90-WH



LDE90-SC



LDE90-BL



LDE90-GD





- Plug and socket between driver and downlight. Easy to plug and unplug light before/after painting etc

Retro-fit Flange
LDE90-LFL-WH
- Retro fit downlight trim
- For use with 90mm diameter downlights to fit into 100mm to 135Ø ceiling holes

RETROFIT FLANGE

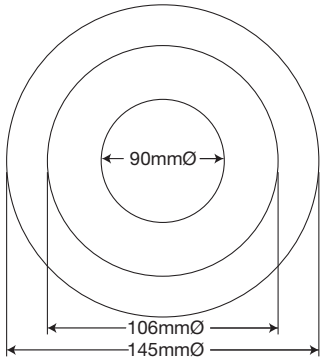

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDE90	IC-4	Closed	cover over	Yes	90mm	65mm	20mm

Velia Low Glare Downlights

Increase your visual comfort - advanced design with less than 22% glare (UGR<22)
• Triac Dimmable • IP44 below ceiling • Use cordset or hardwire to large terminals

VELIA DARKLIGHTERS



LDUGR90-BL



LDUGR90-WH

INTEGRAL LED
• (BL=850) (WH=950) total lm • Dimmable • 35° Beam
• 10 Watts • 3,000K • CRI>80

IP 44 | 220V-240V | IC-4

LDUGR90

- 10 Watt LED
- Triac dimmable
- 35° half-beam light
- Flange size 104mmØ
- Easy large looping terminal on driver for quick and easy installations
- SAA approved driver





Retro-fit Flange
LDE90-LFL-WH



- Retro fit downlight trim
- For use with 90mm diameter downlights to fit into 100mm to 135Ø ceiling holes

RETROFIT FLANGE

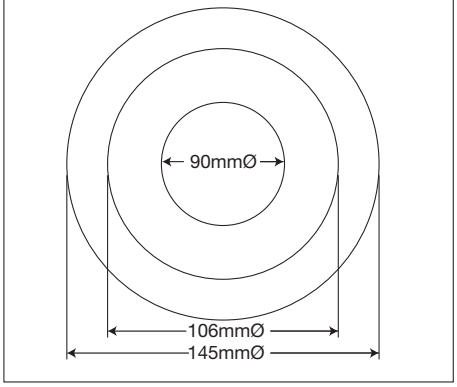

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDUGR90	IC-4	Closed	Cover over	Yes	90mmØ	100mm	20mm

Equator LED Surface Downlights

Less than 19% glare - Compliant to UGR <19 Standard
Specified by Superlux to ensure quality light output & dimming
• Ideal for use in buildings where Fire Rated Ceiling Construction is required

EQUATOR SURFACE DOWNLIGHTS



LDLS115-BL



LDLS115-WH

EXAMPLES WITH OPTIONAL REFLECTORS



LDLS115-BL + LDLS-REF-GD



LDLS115-WH + LDLS-REF-GD



LDLS115-BL + LDLS-REF-WH



LDLS115-WH + LDLS-REF-SI

OPTIONAL REFLECTORS



LDLS-REF-GD



LDLS-REF-WH



LDLS-REF-SI

***INTEGRAL* LED**
• 950 total lm • Dimmable • 45° Beam
• 10 Watts • 3,000K • CRI>80

IP 54 | 220V-240V

LDLS115
- 10 Watt Integral LED
- 115mmØ x 120mmH
- 45° beam angle with spill light out to 90°
- Integral driver in base
- Dimmable with Trailing edge and Universal dimmers
- Dims down to 20% of light output
- Available in black with silver reflector or white with white reflector
- Other colour reflectors are available to be purchased separately
- Aluminium body, plastic reflector

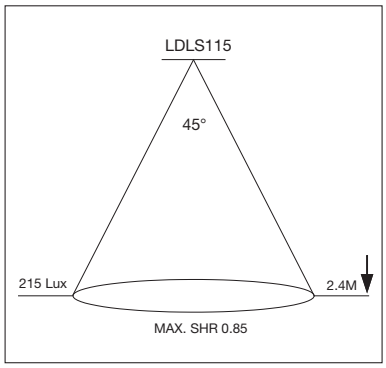

LDLS-REF
- Optional extra reflectors for LDLS115 Surface Mount Downlight
- Available in gold, white or silver

LED Downlights

High wattage LED lighting

SURFACE DOWNLIGHT/SPOTLIGHT



INTEGRAL LED
• 2,250 total lm • Dimmable • 38° Beam
• 30 Watts • 4,000K • CRI>80

220V-240V

SCD30-TLT
Titaha downlight/spotlight
- 360° swivel at base, head tiltable through 90°
- 30 Watt integral LED
- 135mmH x 110mmØ
- Use as surface mounted downlight or as a spotlight
- Ideal for use on angled ceilings where downlighting is required
- 38 degree beam angle
- Integral driver in base

MAHINA SURFACE DOWNLIGHT



LDLS120-WH LDLS120-BL

INTEGRAL LED
• 850 total lm • 80° Beam
• 12 Watts • 3,000K • CRI>80

220V-240V

LDLS120-WH
- Ideal for fire rated ceiling constructions
- 120mmØ x 65mmH
- Diffused 80° half light beam angle
- Integral driver in base
- Aluminium body, plastic diffuser



RECTANGLE TILTABLE

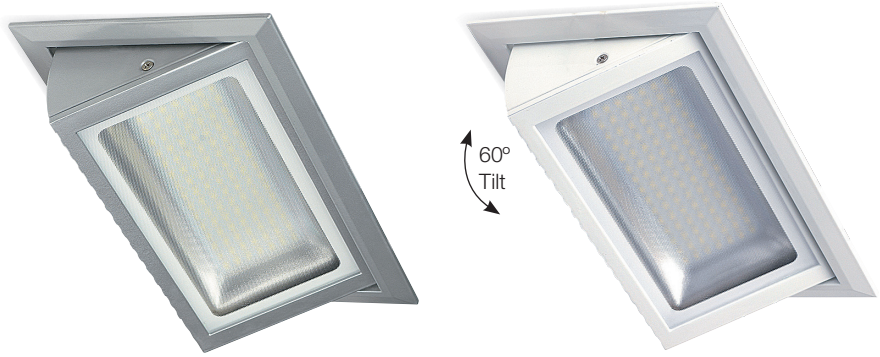

SRD48-TLT-SI SRD48-TLT-WH

INTEGRAL LED
• 4,500 total lm • 65° Beam
• 48 Watts • 4,000K • CRI>80

220V-240V 135

SRD48-TLT
- 48 Watt LED COB technology
- Flange 250mmL x 150mmW

IMPORTANT: Do not put LED fixtures on the same curcuit as Metal Halide

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
SRD48-TLT	CA135	Closed	Side Abutted	Yes	230mm x 130mm	230mm	75mm

Optimised Non Glare Downlights

LED's set back and Anti-Glare Baffle for low glare U.G.R.

- Aluminium body - forward traveling heat sinking to dissipate heat below the ceiling to ensure optimum life • Samsung brand LED technology
- Integral driver for easy installation • IP44 from below ceiling



12 WATT



LDL125-WH

INTEGRAL LED
• 900 total lm • Dimmable • 60° Beam
• 12 Watts • 3,000K • CRI>81

220V-240V | IP 44

LDL125
- Flange size 148mmØ
- Dimmable down to 30% of full brightness

15 WATT



LDL160-WH

INTEGRAL LED
• 1275 total lm • 60° Beam
• 15 Watts • 3,000K • CRI>81

220V-240V | IP 44 | 90

LDL160-WH
- Flange size 180mmØ
- Non dimmable

18 WATT



LDL175-WH

INTEGRAL LED
• 1560 total lm • 60° Beam
• 18 Watts • 4,000K • CRI>81

220V-240V | IP 44 | 90

LDL175-WH
- Flange size 198mmØ
- Non dimmable

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDL125	IC	Closed	cover over -non flammable	Yes	125-135mm	180mm	25mm
LDL160	CA90	Closed	Side Abutted	Yes	160mm	180mm	20mm
LDL175	CA90	Closed	Side Abutted	Yes	175mm	180mm	20mm

Colour Selectable LED Downlights

IP54 front face - Ideal for under eaves

- Plastic over Aluminium construction
- Choose from 3,000K, 4,000K or 5,700K colour temperature at a flick of the switch
- Use cordset or hardwire to extra large terminals • Triac Dimmable



LDU150-WH



LDU200-WH

COLOUR SELECTABLE SWITCH

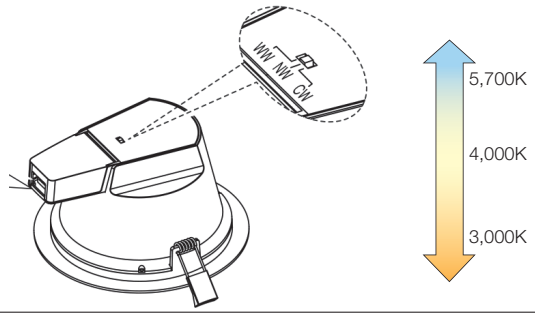

INTEGRAL LED
• 1710-1960 total lm • Dimmable • 90° Beam
• 18 Watts • 3,000K-5,700K • CRI>80

IP 54 | 220V-240V | 90°

LDU150-WH

- Flange size 173mmØ
- Supplied with 600mm AS approved cordset
- Extra large terminals

INTEGRAL LED
• 2330-2650 total lm • Dimmable • 90° Beam
• 25 Watts • 3,000K-5,700K • CRI>80

IP 54 | 220V-240V | 90°

LDU200-WH

- Flange size 230mmØ
- Supplied with 600mm AS approved cordset
- Extra large terminals

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	BUILDING SIDE CLEARANCE
LDU150	CA90	Closed	Side Abutted	Yes	150-160mm	150mm	50mm
LDU200	CA90	Closed	Side Abutted	Yes	200-210mm	150mm	50mm

Low Glare & Colour Selectable LED

Advanced reflector allows less than 19% glare - compliant to UGR<19 standard

- Choose from 3,000K, 4,000K or 5,700K colour temperature at the flick of a switch
- Triac Dimmable • IP54 below ceiling • Use cordset or hardwire to extra large terminals



LDUGR150-WH



LDUGR200-WH

COLOUR SELECTABLE SWITCH

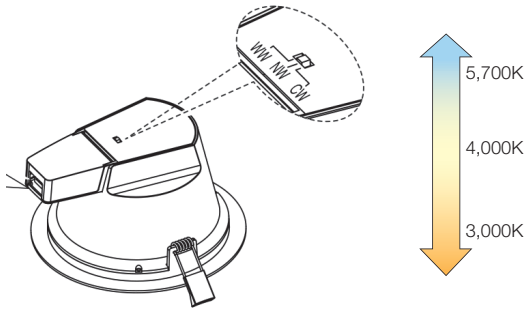

INTEGRAL LED

• 1510-1710 total lm • Dimmable • 60° Beam
• 18 Watts • 3,000K-5,700K • CRI>80

IP 54 | 220V-240V | 90°

LDUGR150-WH

- Flange size 173mmØ
- Supplied with 600mm AS approved cordset

INTEGRAL LED

• 2250-2580 total lm • Dimmable • 60° Beam
• 25 Watts • 3,000K-5,700K • CRI>80

IP 54 | 220V-240V | 90°

LDUGR200-WH

- Flange size 230mmØ
- Supplied with 600mm AS approved cordset

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	BUILDING SIDE CLEARANCE
LDUGR150	CA90	Closed	Side Abutted	Yes	150-160mm	150mm	50mm
LDUGR200	CA90	Closed	Side Abutted	Yes	200-210mm	150mm	50mm

Wet Area Downlights

Lights for installation in wet areas such as bathrooms, laundrys and under eaves
- SAA safety approved drivers

LED IP54

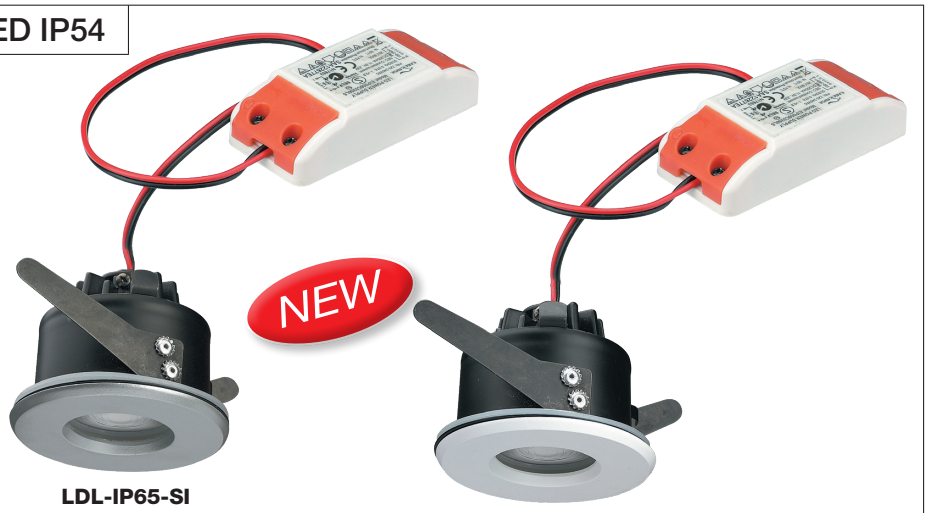

LDL-IP65-SI

LDL-IP65-WH

INTEGRAL LED
- 540 total lm • 50° Beam
- 6.5 Watts • 3,000K • CRI>81

IP 65 | 220V-240V | IC-4

LDL-IP65
- 6.5 Watt integral LED
- 81mmØ overall flange
- Supplied with LED driver, simply wire direct to mains
- Ideal for use in wet areas

MR16 IP65



SV-IP65-WH



Kit contents

MR16

LED
MR16-HPLED-WW



- 350 total lm
- 5 Watts • 3,000K • CRI>80 • 38° Beam

MR16 | 135 | IP 65 | MAX. 50W | LED REPLACEABLE

SV–IP65
- 85mmØ overall
- Ideal for use in wet areas
- Electronic transformer with lamp holder assembly with thermal cut off included
- MRE16-35-D38 Halogen lamp included

EAVE LIGHT IP55



SV–IP55-SS



MR16 | 135 | 316 Stainless Steel | IP 55 | MAX. 20W | LED REPLACEABLE

SV–IP55-SS
- 316 stainless steel trim
- 105mmØ overall
- Ideal for under eave or in wet areas
- Purchase SVE-T60 transformer separately
- Flange sits proud of eave by 25mm
- 20 Watt Halogen lamp included

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDL-IP65	IC-4	Closed	Cover Over	Yes	75mm	120mm	20mm
SV-IP65	CA135*	Closed	Side Abutted	Yes	70mm	180mm	50mm
SV-IP55	CA135*	Closed	Side Abutted	Yes	75mm	120mm	50mm

* IN AUSTRALIA CLASSIFICATION IS “DO NOT COVER”

E27 R80 Lamp Downlights

LED replaceable downlight

• Lampholders can be prewired before assembly • Designed for quicker installation
• Draft proof enclosed construction • Suits a wide range of ceiling thicknesses • Long life ceramic lamp holder

E27 LED DOWNLIGHT

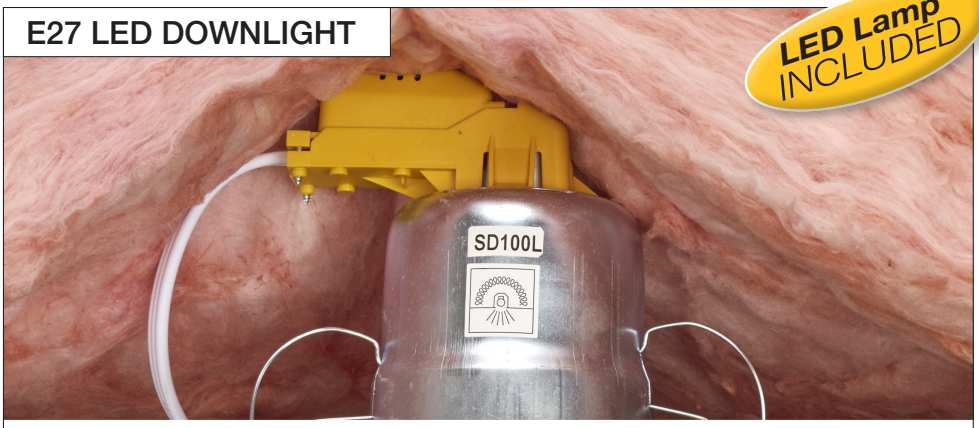



E27

LED
R80D-12EWW
Included



• 900 total lm • Dimmable
• 12 Watts • 3,000K • CRI>80 • 120° Beam

E27 | IES | R80 | MAX. 20W | LED REPLACEABLE | Made in NZ

SD100L-WH

- This model includes the R80 LED lamp
- Available in white only

E27 DOWNLIGHT



Can be pre-wired

Easy to assemble

Your choice of colour trims





SD100-WH



SD100-SI



SD100-SC



SD100-BS



SD100-BL

PURCHASE Lamp SEPARATELY

E27

LED
R80D-12EWW



• 900 total lm • Dimmable
• 12 Watts • 3,000K • CRI>80 • 120° Beam

E27 | 135 | IES | R80 | MAX. 100W | LED REPLACEABLE | Made in NZ

SD100

- Available in white, silver, satin chrome, brass or black
- Purchase lamp separately

Protected Installation T C° Thermosafe

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
SD100L	IC	Closed	Cover over - Non Flammable	Yes	105mm	180mm	25mm
SD100	CA135*	Closed	Side Abutted	Yes	105mm	180mm	25mm

* IN AUSTRALIA CLASSIFICATION IS “DO NOT COVER”

SD125 Trim Accessories

Large retrofit trims, diffusers and square trim upgrades

FLOATING GLASS ACCESSORY



SD-FG-SC Satin Chrome



SD-FG-WH White



LDL125-WH
+
SD-FG-WH

SQUARE TRIM ACCESSORY



SD-Trim-Sl
Silver

SD-Trim-WH
White

SD-Trim-BL
Black

Baffle-BL
Black Baffle

Baffle-WH
White Baffle

RETROFIT TRIM



SD125-LFL-WH



SD125-LFL-WH
- Retro fit downlight flange
- For use with the SD125F and SD125 to fit holes 130mm-175mm

WATER RESISTANT DIFFUSER



SD-DIF

SD-FG
Provides a soft side lighting effect to ceilings and walls, which prevents the common “dark cave ceiling effect” often produced by downlights in hallways

- Floating glass lens with opaque centre giving a soft, even no-glare light
- Fits to SD125,SD125F and LDL125 model downlights
- Your choice of 2 trim colours
- 185mmØ x 30mmH

SD-TRIM
- Square trims fit flush to ceiling
- Fits to SD125 and SD125F model downlights
- Your choice of colour trims and baffles
- 152mm Square

IP X5

SD-DIF
- To fit SD125L downlight model only
- The diffuser directs some soft light onto the ceiling reducing the cave like effect which downlights can give
- Keeps reflector clean
- Higher illuminance in smaller rooms as more light is reflected sideways

E27 Dimmable Downlights

LED replaceable downlights

• High efficiency reflector • Thermal cut-off and auto reset function for protection against misuse and overloading
• 3 mounting clips to ensure optimum snug fit to ceiling

LED DOWNLIGHT

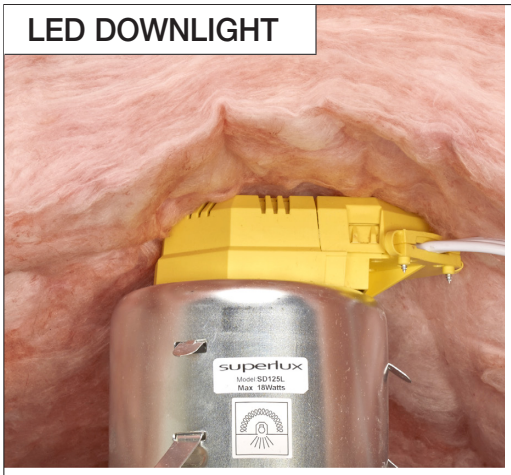



Dimmable 8W Lamp



SD125L-WH



SD125L-SC



SD125L-GD



SD125L-BL



SD125L-WH + BAFFLE-WH + L564



SD125L-SC + BAFFLE-WH + L564



SD125L-BL + BAFFLE-BL + L564
SD125L can be converted to baffle look



L564 Reflector to be used in conjunction with baffle



BAFFLE-BL



BAFFLE-WH

E27

LED
GLSD-8EWW
Included



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | IES | MAX. 15W | LED REPLACEABLE | Protected Installation Thermosafe

SD125L
• Dimmable down to 30% of full light

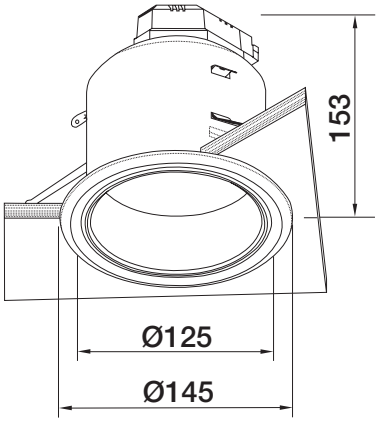

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
SD125L	IC	Closed	Cover over - Non Flammable	Yes	125mm*	180mm	25mm
*SD125LFL	Optional Flange				130mm -175mm		

Tilt and Rotate LED Downlight

30 minute fire rated

LED 6 WATT



LDLB90-WH



LDLB90-SC



LDLB90-GD



LDLB90-BL

MR16

LED
MR16-HPLED-WH
Included



- 480 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

30 MIN | MR16 | MAX. 50W | 135° | 220V-240V | LED REPLACEABLE

LDLB90

- Integral transformer for easy installation
- Aluminium die cast face
- Both lamp and downlight have heat sink technology for effective thermal management
- 5 year transformer warranty

60 MIN

LDLB90-FIRE60

- 60 minutes fire rated version available. See website for specifications

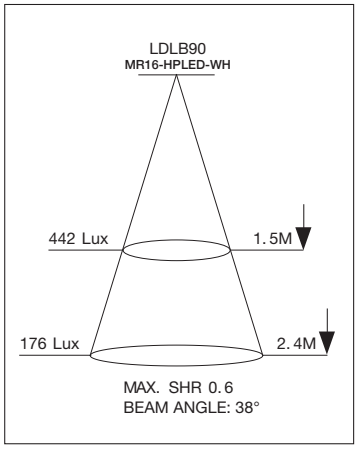





Retro-fit Flange
LDE90-LFL-WH

- Retro fit downlight trim
- For use with 90mm diameter downlights to fit into 100mm to 135Ø ceiling holes

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDLB90	CA135*	Closed	Side Abutted	Yes	90mm	210mm	50mm

* IN AUSTRALIA CLASSIFICATION IS "DO NOT COVER"

LED Square Tiltable Downlight

30 minute fire rated

LDLB90S

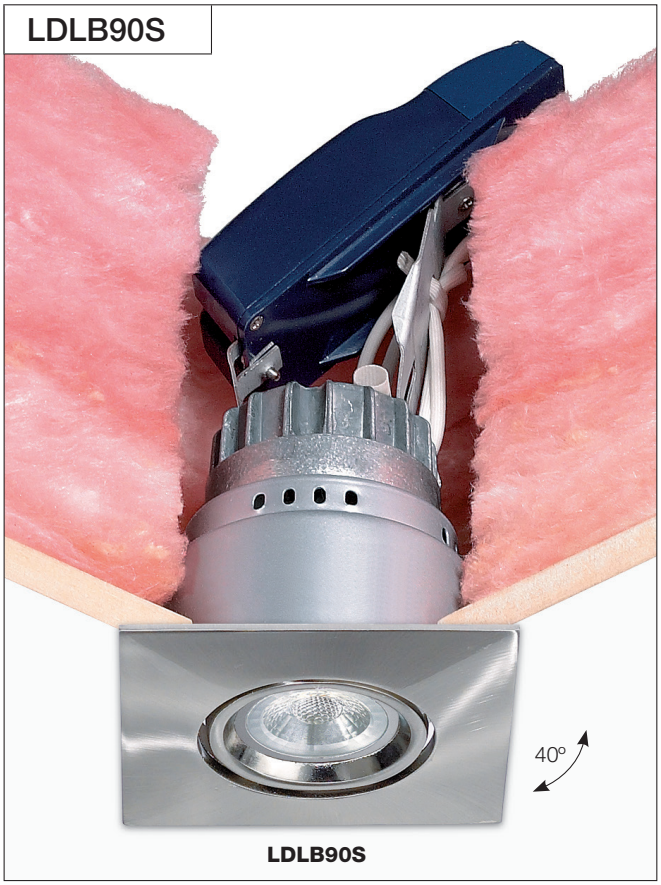

LDLB90S

MR16

LED
MR16-HPLED-WH
Included



- 480 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

ENGINEERED FOR FIRE SAFETY FOR YOUR PEACE OF MIND

30 MIN · MR16 · MAX. 50W · 135 · LED REPLACEABLE

LDLB90S

- 40° angular adjustment and fully rotatable
- Thermal cut-off protection with auto reset function
  Guards against installation faults or overlamping
- 5 year transformer warranty



LDLB90S-GD



LDLB90S-SC



LDLB90S-WH



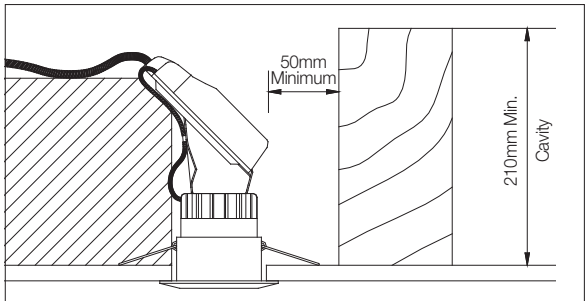

Hole Ø90mm LDLB90S

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDLB90S	CA135*	Closed	Side Abutted	Yes	90mm	210mm	50mm

* IN AUSTRALIA CLASSIFICATION IS “DO NOT COVER”

LED Slimline Lights

IP54 wall or ceiling mount
- Made from durable polycarbonate

IP 54

200MM DIAMETER



CLU200-CW

INTEGRAL LED
- 1120 total lm • 120° Beam
- 12 Watts • 4,000K • CRI>80

CLU200-CW
- 200mmØ x 45mmD

250MM DIAMETER

Dimmable



CLU250-DCW

INTEGRAL LED
- 1056 total lm • 120° Beam
- 12 Watts • 4,000K • CRI>80

CLU250-DCW
- 250mmØ x 45mmD

Dimmable



CLU250-DWW

INTEGRAL LED
- 996 total lm • 120° Beam
- 12 Watts • 3,000K • CRI>80

CLU250-DWW
- 250mmØ x 45mmD

Ocupancy SENSOR



CLU250-SCW

INTEGRAL LED
- 1056 total lm • 120° Beam
- 12 Watts • 4,000K • CRI>80

CLU250-SCW
- 250mmØ x 45mmD
- Built-in microwave occupancy sensor
- 140º beam, 7 metre radius detection area
- Not adjustable
- Operates when light level is 100 lux or below
- 30 seconds hold time after detection



LED Slimline Lights

IP54 wall or ceiling mount
• Made from durable polycarbonate lens and body

IP 54

300MM DIAMETER

Dimmable



CLU300-D3CCT

INTEGRAL LED
• 1710-1840 total lm • Dimmable • 120° Beam
• 18 Watts • 3,000-4,000-5,700K • CRI>80

CLU300-D3CCT
• 300mmØ x 45mmD
• Colour adjustable 3,000K, 4,000K or 5700K
• IK10
• 40,000 hour @ L70 B50



Back of fixture
Showing easy to install mounting bracket and terminal block with cover

LED Slim Edge Light

Latest light diffusion technology 777 series
• Wall or ceiling mount • Shadowless lens • SAA Australian Safety Certified • IP44 when ceiling mounted
• Large cable entry for easy wiring

WARM WHITE



777-12

INTEGRAL LED
• 800 total lm • 160° Beam
• 12 Watts • 3,000K • CRI>80

777-12
• 280mmØ x 60mmD

Luna LED Ceiling/Wall Lights

Quality acrylic lenses allow more transmission of light than glass

• Trimless design • Each fitting has a specialised shadowless lens • Large cable entry for easy wiring – room for looping • Inline mounting holes for sturdy batten mounting • Integral driver • Can be ceiling or wall mounted

NEW



720-LED24

INTEGRAL LED
• 2400 total lm
• 24 Watts • 4,000K • CRI>80

720-LED24
24 Watt Luna light
• Opal acrylic lens with metal back plate
• 350mmØ x 107mmH

LED Ceiling Lights

Safety approved SAA drivers

• Integral electronic driver • Easy cable entry • Ceiling or wall mount

725 SERIES MATT LENS



725-12

INTEGRAL LED
• 1200 total lm
• 12 Watts • 4,000K • CRI>80

725-12
• 12 Watt LED ceiling or wall light
• Matt opal lens
• 300mmØ x 70mmH
• Twist lock lens

LED CEILING LIGHTS



CLY326-WH

INTEGRAL LED
• 1280 total lm
• 16 Watts • 3,500K • CRI>80

220V-240V | IP 44

CLY326
• White or chrome trim with acrylic lens
• 326mmØ x 107mmD
• Electronic driver included in base
• Made from polycarbonate

LED Acrylic Ceiling & Wall Lights

Safety approved SAA drivers
- Light output is uniform and non-glare, ideal for bedrooms, care homes and hospital lighting
- Acrylic lenses • Integrated electronic driver • Easy cable entry • Wall or ceiling mount

OPAL LENS - WIDE DIFFUSED LIGHT ONTO WALLS



CL207-12



CL207-24

INTEGRAL LED
- 1200 total lm
- 12 Watts • 4,000K • CRI>80

CL207-12
- 290mmØ x 75mmH

INTEGRAL LED
- 2400 total lm
- 24 Watts • 4,000K • CRI>80

CL207-24
- 410mmØ x 80mmH

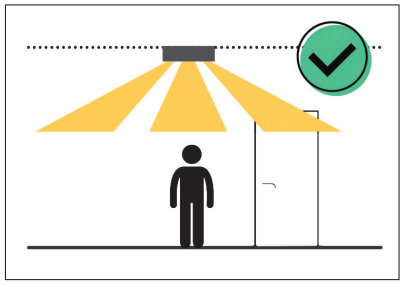

Even light distribution

SILVER TRIM



CL205-12





CL205-24

INTEGRAL LED
- 1200 total lm
- 12 Watts • 4,000K • CRI>80

CL205-12
- Trim prevents light spill across ceiling
- 300mmØ x 90mmH

INTEGRAL LED
- 2400 total lm
- 24 Watts • 4,000K • CRI>80

CL205-24
- Trim prevents light spill across ceiling
- 410mmØ x 110mmH

LED Ceiling Dream lighters

Easy to install mounting holes, cable entry and terminal block
• SAA safety approved drivers • Ceiling or wall mount

IP 44



787-14



Inside of fixture
Showing easy to install mounting holes, cable entry and terminal block with cover

INTEGRAL LED
• 980 total lm
• 14 Watts • 3,800K • CRI>80

787-14
- Matt opal Lens
- 360mmØ x 85mmH
- Twist lock lens
- Wire direct to mains power supply
- Easy to wire large terminal block
- IP44 when flat ceiling mounted
- White metal base with acrylic lens

727 SERIES MATT LENS WITH TRIM



727-14-SC



727-12-SC

INTEGRAL LED
• 980 total lm
• 14 Watts • 3,800K • CRI>80

727-14-SC
- Trim prevents light spill across ceiling
- Matt opal lens with satin chrome trim
- 360mmØ x 80mmH
- Twist lock lens

INTEGRAL LED
• 1200 total lm
• 11 Watts • 4,000K • CRI>80

727-12-SC
- 12 Watt LED ceiling or wall light
- Trim prevents light spill across ceiling
- Matt opal lens with satin chrome trim
- 300mmØ x 80mmH
- Twist lock lens

Glass LED Ceiling Lights

IP44 ingress protection for wet areas

- Can be wall or ceiling mounted

IP 44

HERNER



CL2021



CL2022

INTEGRAL LED
- 1080 total lm
- 12 Watts • 3,000K • CRI>80

CL2021
- Herner 12 Watt LED light
- Glass with white metal back plate
- 230mmØ x 90mmH

INTEGRAL LED
- 1620 total lm
- 18 Watts • 3,000K • CRI>80

CL2022
- Herner 18 Watt LED light
- Glass with white metal back plate
- 290mmØ x 95mmH

Safety approved SAA drivers

- Acid glass shades • Satin chrome claws • Integral electronic driver
- Easy cable entry • Integral LED

220V-240V



CL420-24



CL420-36



LED array and easy to wire terminal block

INTEGRAL LED
- 2592 total lm • Dimmable
- 24 Watts • 3,000K • CRI>80

CL420-24
- 350mmØ x 100mmD

INTEGRAL LED
- 2400 total lm
- 36 Watts • 3,000K • CRI>80

CL420-36
- 450mmØ x 114mmD
- Non dimmable

Glass LED Ceiling Lights

Long lasting LED, less maintenance required

220V-240V

GLASS & CHROME CEILING LIGHTS



CL2257-CH

INTEGRAL LED
• 1080 total lm
• 12 Watts • 3,000K • CRI>80

CL2257-CH
- Silver base with chrome clasps
- Frosted glass
- 320mmØ x 70mmD
- Driver included in base

TRIM



CL5003-8

INTEGRAL LED
• 850 total lm
• 8.5 Watts • 3,000K • CRI>80

CL5003-8
- Frosted glass, with chrome edge detail
- 8.5 Watt, LED light similar to 100Watt incandescent
- Integral driver in base
- 300mmØ x 90mmD



CLL2171-CH

INTEGRAL LED
• 1200 total lm
• 12 Watts • 4,000K • CRI>80

CLL2171-CH
- 12 Watt integral LED ceiling light
- Acid glass with chrome trim
- 350mmØ x 118mmD
- Electronic driver included
- Mounting 220mmØ

Glass Ceiling Button Lights

Acid and decorative glass combinations

CHROME CLASP

• Quick release chrome clasps



CL2003-2

CL2005-2

CL2005-3

CL2030-1

E27

LED
SBL-8EWW



• 806 total lm
• 8 Watts • 3,000K • CRI>80 • 250° Beam

E27 | 2x 60W | LED REPLACEABLE

CL 2003-2
• 300mmØ x 100mmD

E27 | 2x 60W | LED REPLACEABLE

CL 2005-2
• 300mmØ x 90mmD

E27 | 3x 60W | LED REPLACEABLE

CL 2005-3
• 370mmØ x 90mmD

E27 | MAX. 60W | LED REPLACEABLE

CL 2030-1
• 300mmØ x 90mmD

WITH PIR



CL430-SEN-WH

E27 | 2x 40W | LED REPLACEABLE

CL430-SEN-WH
• Integrated PIR motion sensor
• Not prone to nuisance tripping associated with microwave sensor
• 370mmØ x 130mmD
• Range 2.8mH x 9mØ
• Ideal for hallways and storage areas

LED Ceiling lights

These timeless, sophisticated ceiling lights illuminate a room brilliantly

ALABASTER GLASS



CLL8508-BS



CLL8508-SC

Lamps INCLUDED



CLS8508-BS



CLS8508-SC

R7s 118mm

LED

LIN118-12WLED-CW

Included



- 1200 total lm
- 12 Watts • 4,000K • CRI>75

R7s 118 | MAX. 150W | LED REPLACEABLE

CLL8508

- 400mm x 105mm
- Available with satin chrome or brass clasps

R7's 78mm

LED

LIN78-6WLED-CW

Included



- 600 total lm
- 6 Watts • 4,000K • CRI>75

R7s 78 | MAX. 100W | LED REPLACEABLE

CLS8508

- 300mm x 95mm
- Available with satin chrome or brass clasps

ACID GLASS

LED Lamp INCLUDED



CLS8536-SC



CLS8536-WH

R7's 78mm

LED

LEDLIN78-6 ***Included***



- 600 total lm
- 6 Watts • 3,000K • CRI>80 • 360° Beam

R7s 78 | MAX. 100W | 220V-240V | LED REPLACEABLE

CLS8536

- 300mmØ

Hollywood Vanity Lights

NEW

Ideal for bathroom and personal lighting

HOL5-LED

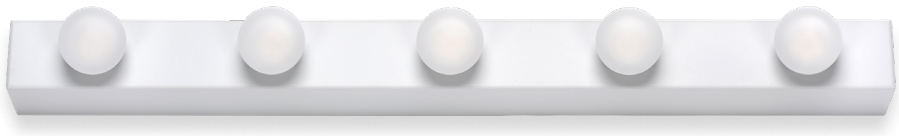

HOL5-LED-WH



HOL5-LED-BB

INTEGRAL LED

• 1850 total lm • Dimmable
• 20 Watts • 3,000K • CRI>90

HOL5-LED
Hollywood light

- Available in white or brushed brass
- Metal construction with frosted acrylic globes
- Dimmable when installed with a Traic dimmer switch
- Globes are spaced so if multiple lights are installed end to end they are evenly spaced
- 600mmL x 50mmH x 95mmDepth

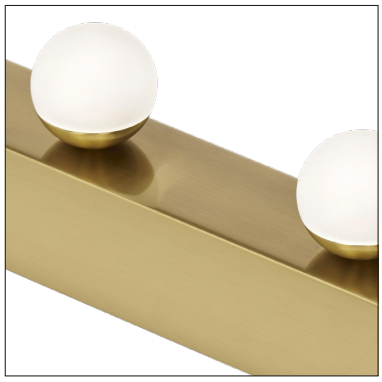



Loxely Wet Area LED Wall Lights

For where water resistant fittings are required

• IP44 Waterproof • Mirror or picture lighting • Integral driver in base • Available in matt white, matt black paint finish or gold plated



INTEGRAL LED
• 480 total lm
• 8 Watts • 4,000K • CRI>80

IP 44

DLW-8
• 455mmL x 140mmD
• Base 150mmW x 60mmH

INTEGRAL LED
• 840 total lm
• 12 Watts • 4,000K • CRI>80

IP 44

DLW-12
• 595mmL x 140mmD
• Base 150mmW x 60mmH

INTEGRAL LED
• 1320 total lm
• 18 Watts • 4,000K • CRI>80

IP 44

DLW-18
• 895mmL x 140mmD
• Base 150mmW x 60mmH

Xavier Wet Area LED Wall Lights

For where water resistant fittings are required
• Tiltable head • IP44 Waterproof • Mirror or picture lighting • Integral driver in base
• Available in white, black or chrome

XAVIER

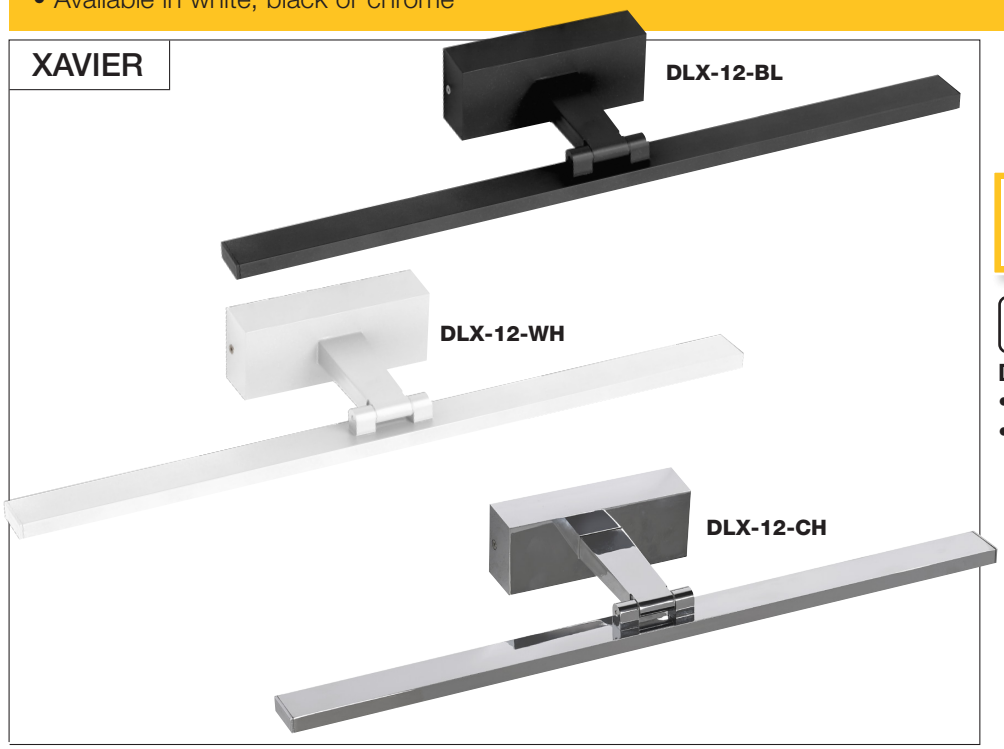

INTEGRAL LED
• 840 total lm
• 12 Watts • 4,000K • CRI>80

IP 44

DLX-12
• 570mmL x 147mmD
• Base 150mmW x 60mmH

ORSON PICTURE LIGHTS

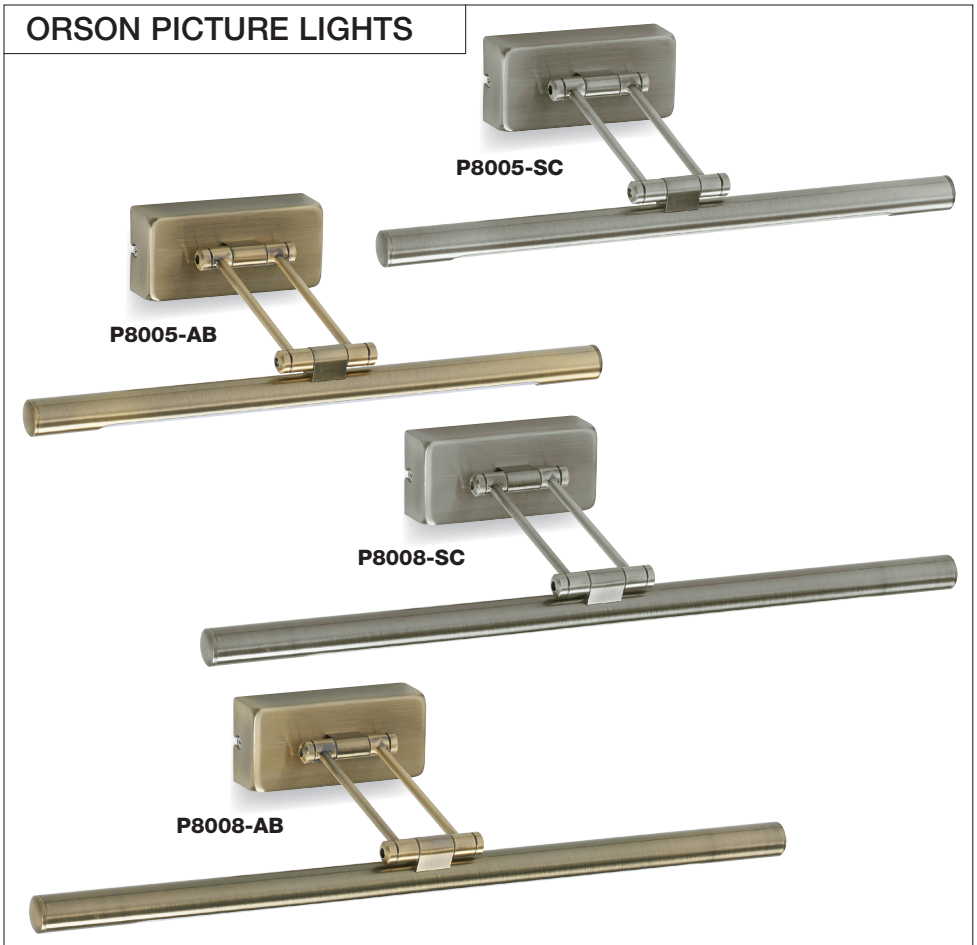

INTEGRAL LED
• 350 total lm
• 5 Watts • 3,000K • CRI>80

P8005
• 5 Watt LED
• 375mmL x 180mmD
• Base 120mmW x 55mmH
• Integral driver in base
• Antique brass or Satin chrome

INTEGRAL LED
• 560 total lm
• 8 Watts • 3,000K • CRI>80

P8008
• 8 Watt LED
• 495mmL x 180mmD
• Base 120mmW x 55mmH
• Integral driver in base
• Antique brass or Satin chrome

Deluxe Strip Lighting

Open back for easy cable entry from multiple points
• Aluminium body with acrylic diffuser • Wall or ceiling mount

84 lm/W | 4000 K | Lamps Included | 220V-240V

ARCHER STRIP LIGHT

• Chrome and satin chrome



DFA-14



DFA-28

DFA-14
• Integral LED 14 Watts
• 600mmL x 68mmH x 76mmD

DFA-28
• T5 fluorescent 28 Watts
• 1200mmL x 68mmH x 76mmD

SILOH STRIP LIGHT

• Satin chrome



DFS-8



DFS-14



DFS-28

DFS-8
• T5 fluorescent 8 Watts
• 345mmL x 40mmH x 58mmD

DFS-14
• Integral LED 14 Watts
• 605mmL x 40mmH x 58mmD

DFS-28
• T5 fluorescent 28 Watts
• 1205mmL x 40mmH x 58mmD

TALIA STRIP LIGHT

• Satin chrome and grey



DFT-8



DFT-14



DFT-21

DFT-8
• T5 fluorescent 8 Watts
• 340mmL x 45mmH x 83mmD

DFT-14
• Integral LED 14 Watts
• 606mmL x 45mmH x 83mmD

DFT-21
• Integral LED 21 Watts
• 906mmL x 45mmH x 83mmD

LEON STRIP LIGHT

• Satin chrome



DFL-8



DFL-14

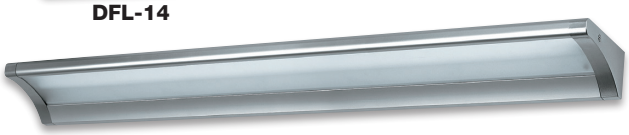

DFL-21

DFL-8
• T5 fluorescent 8 Watts
• 328mmL x 60mmH x 115mmD

DFL-14
• Intergral LED 14 Watts
• 598mmL x 60mmH x 115mmD

DFL-21
• T5 fluorescent 21 Watts
• 898mmL x 60mmH x 115mmD

Vanity & Picture Lights

LED strip lights for mirrors and feature art
- Driver included in base

CORBAN STRIP LIGHT

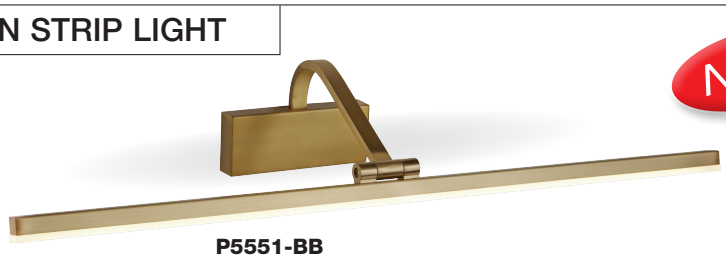

P5551-BB

INTEGRAL LED
- 588 total lm
- 12 Watts • 3,000K • CRI>80

P5551-BB
- 510mmL x 200mmD
- Base 140mmL x 55mmH
- Satin brass finish
- Tiltable head

AIDAN STRIP LIGHT

- Acrylic and Chrome

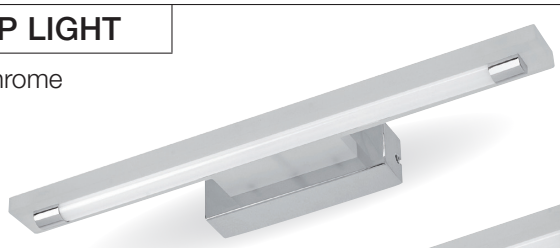

DLA-8

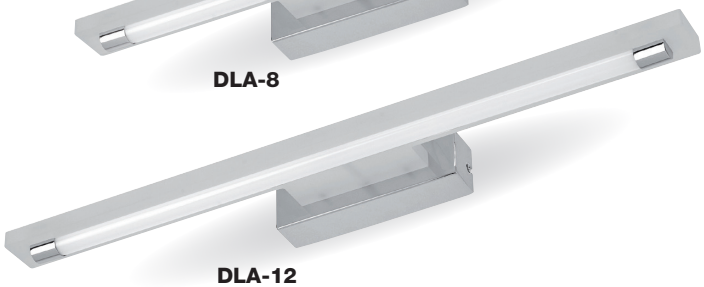

DLA-12

INTEGRAL LED
- 610 total lm
- 8 Watts • 4,000K • CRI>80

DLA-8
- 490mmL x 110mm depth
- Base mounting 170mmL x 46mmH

INTEGRAL LED
- 890 total lm
- 12 Watts • 4,000K • CRI>80

DLA-12
- 630mmL x 110mm depth
- Base mounting 170mmL x 46mmH

SANSA STRIP LIGHT

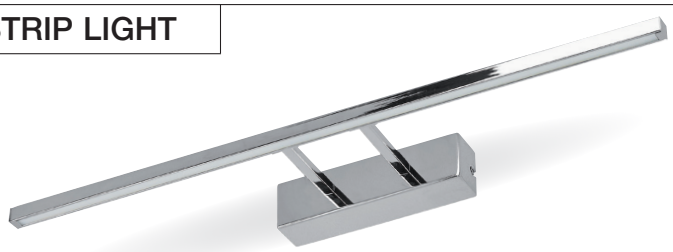

DLS-12

INTEGRAL LED
- 680 total lm
- 12 Watts • 4,000K • CRI>80

DLS-12
- 592mmL x 125mm depth
- Base mounting 170mmL x 46mmH
- Chrome

TOBIAS STRIP LIGHT

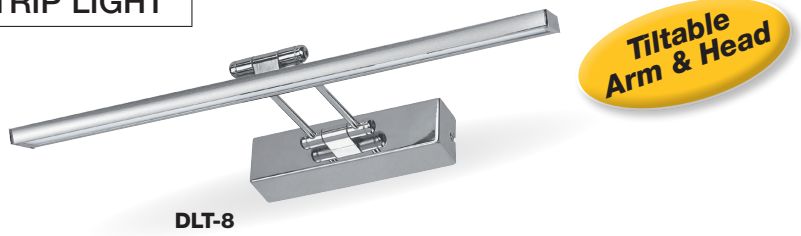

DLT-8

INTEGRAL LED
- 480 total lm
- 8 Watts • 4,000K • CRI>80

DLT-8
- 450mmL x 190mm depth
- Base mounting 170mmL x 46mmH
- Chrome

RUBEN STRIP LIGHT



DLR-5

INTEGRAL LED
- 346 total lm
- 5 Watts • 4,000K • CRI>80

DLR-5
- 377mmL x 180mmD
- Oval base 90mmH x 160mmW
- Chrome

T8 Fluorescent Lighting

Proven reliability, electronic ballast
- Complies with minimum energy performance standards
- Individually switched

80 lm/W | T8 | Lamp Included | 5000 K | 220V-240V

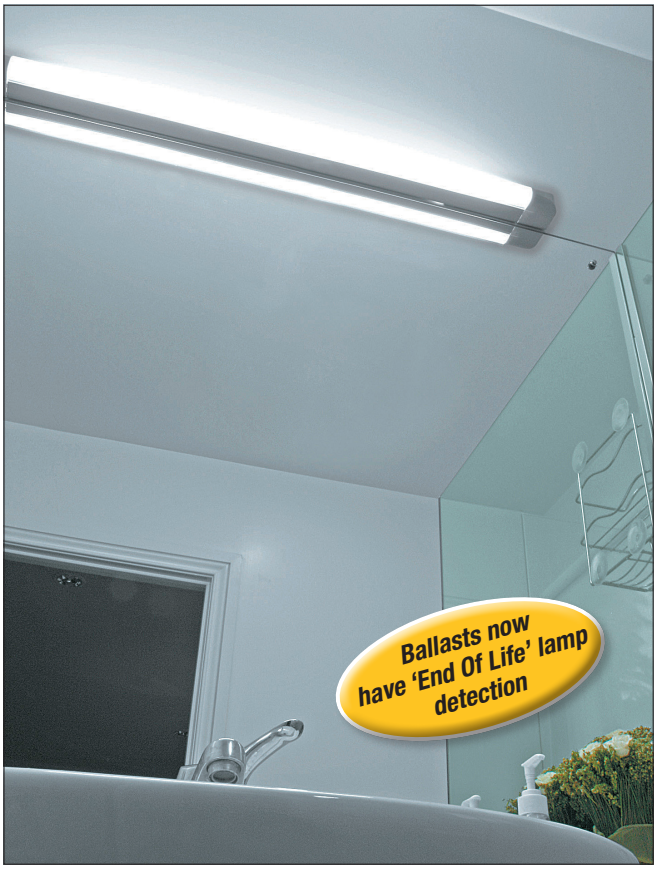

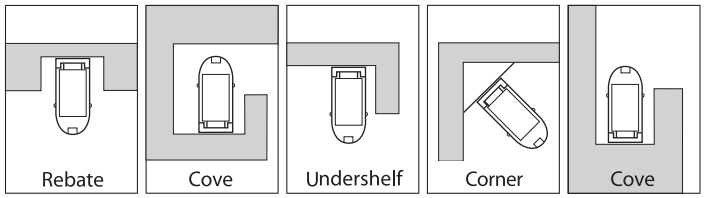

SFE Fluorescent Series

Model	Mounting holes	Cable entry distance from end
SFE-36	**1025mm**	**280mm**
SFE-30	**715mm**	**280mm**
SFE-18	**415mm**	**170mm**
SFE-15	**310mm**	**130mm**
SFE-10CS	**180mm**	**130mm**

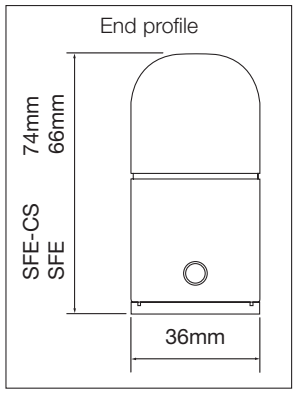

SFE SERIES



SFE-36



SFE-18

36 Watt

SFE-36 (1265mmL)

18 Watt

SFE-18 (655mmL)

ECG must not be installed on a circuit with inductive loads.

SFE CORD SET SERIES



SFE-10CS

10 Watt

SFE-10 CS (412mmL)
- Cable length 1800mm

ECG must not be installed on a circuit with inductive loads.

B1 MAGNETIC BALLAST



WF-36-WH

36 Watt | T8 | IP 44

WF 36 1240mm

ION High Efficiency LED Batten Lights

New Rapid installation SLU-CLIPS

• Easy wire - large terminal block • Painted white back plate with polycarbonate diffuser • High Quality SAA approved Integral driver integral in base



INTEGRAL LED
• 6000 total lm
• 50 Watts • 4,000K • CRI>80

SLU50-CW
- Metal base with polycarbonate diffuser
- Can be directly screw mounted, attached with accessory SLU-CLIPS or suspended
- 1525mmL x 60mmW x 60mmD
- Large terminal block for looping

ION BATTENS

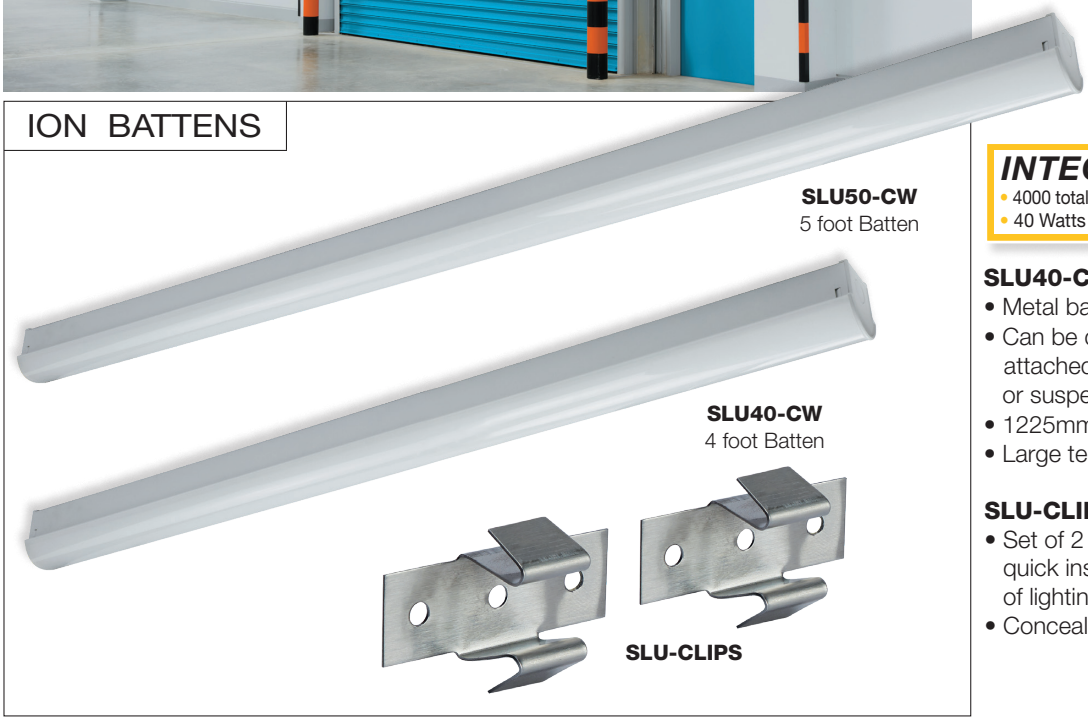

INTEGRAL LED
• 4000 total lm
• 40 Watts • 4,000K • CRI>80

SLU40-CW
- Metal base with polycarbonate diffuser
- Can be directly screw mounted, attached with accessory SLU-CLIPS or suspended
- 1225mmL x 60mmW x 60mmD
- Large terminal block for looping

SLU-CLIPS
- Set of 2 stainless steel clips for quick installation without dismantling of lighting fixtures
- Concealed once the fitting is mounted

LED Batten Strip Lights

Easy wire - large terminal block

• Painted white back plate with polycarbonate diffuser • SAA approved Integral driver
• Can be mounted into internal corners

ASTRA BATTEN



INTEGRAL LED
• 1440 total lm
• 18 Watts • 4,000K • CRI>80

SLD18-CW
- 480mmL

SLT5 Linkable LED Strips - 3,500K

• Directly linkable to provide continuous lines of light • Very low heat output • When joined fittings can be individually switched • Built in electronic driver • Supplied complete with diffuser and plastic mounting clips • Fixtures may be linked with SFT5 cable connectors up to 120 Watts maximum • Fixture lengths exclude connectors

SLT5WW-300





End profile



Individually switched

SLT5WW-600



No External Driver Required

SLT5WW-900



SLT5WW-1200



INTEGRAL LED
• 310 total lm
• 3 Watts • 3,500K • CRI>80

SLT5WW-300 • 255mmL

INTEGRAL LED
• 680 total lm
• 7 Watts • 3,500K • CRI>80

SLT5WW-600 • 558mmL

INTEGRAL LED
• 1300 total lm
• 14 Watts • 3,500K • CRI>80

SLT5WW-900 • 892mmL

INTEGRAL LED
• 1700 total lm
• 18 Watts • 3,500K • CRI>80

SLT5WW-1200 • 1192mmL

SFT5 CONNECTORS



SFT5-C150



SFT5-C300



SFT5-C600



SFT5-C1800

SFT5-C150
Connector cable (150mm)

SFT5-C300
Connector cable (300mm)

SFT5-C600
Connector cable (600mm)

SFT5-C1800
(1800mm)
Power supply cord

ECG must not be installed on a circuit with inductive loads.

SLT4 Linkable LED Strips - 6,000K

• Directly linkable to provide continuous lines of light • Very low heat output • When joined fittings can be individually switched • Built in electronic driver • Supplied complete with diffuser and metal mounting clips • Fixtures may be linked with SFT4 cable connectors up to 120Watts maximum • Fixture lengths exclude connectors

SLT4-600



No External Driver Required

INTEGRAL LED
• 860 total lm =
• 10 Watts • 6,000K • CRI>80

SLT4-600 • 575mmL

SLT4-900



INTEGRAL LED
• 1180 total lm =
• 12 Watts • 6,000K • CRI>80

SLT4-900 • 875mmL

SLT4-1200





End profile


Individually switched

INTEGRAL LED
• 1640 total lm =
• 18 Watts • 6,000K • CRI>80

SLT4-1200 • 1175mmL

SFT4 CONNECTORS



SFT4-C1800
• Power supply cord (1800mm)



SFT4-C1600
• 1600mm long connector cable



SFT4-C150
• Connector cable (150mm)



SFT4-C300
• Connector cable (300mm)



SFT4-C600
• Connector cable (600mm)

ECG must not be installed on a circuit with inductive loads

LED Replaceable Strip Lights

Available in 2 lengths with 2 switch types

Lamp Included | 220V-240V | Made in NZ

PLAIN SWITCHED MODEL

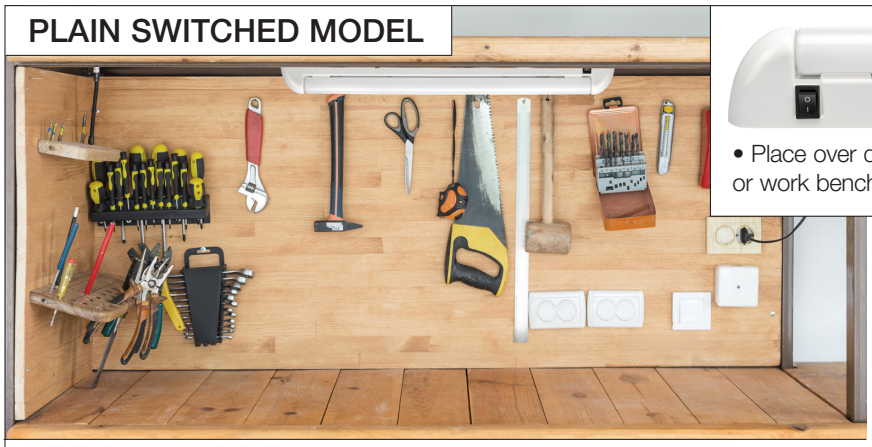

• Place over desks or work benches



SL-60



SL-60-BL



SL-35



SL-35-BL

NEW BLACK MODELS

S14s

LED
TUBE500-LED-WW *Included*
• 880 total lm
• 8 Watts • 2,700K • CRI>80 • 270° Beam

S14S | LED ONLY | MAX. 10W | LED REPLACEABLE

SL-60
• 595mmL x 34mmW x 60mmH

S14s

LED
TUBE300-LED-WW *Included*
• 450 total lm
• 4 Watts • 2,700K • CRI>80 • 270° Beam

S14S | LED ONLY | MAX. 7W | LED REPLACEABLE

SL-35
• 395mmL x 34mmW x 60mmH

DOOR SWITCHED MODEL



• Use in cupboards and pantries



SL-60-DS



SL-35-DS

INTEGRAL MICRO-SWITCH, SEPARATE SWITCH INSTALLATION NOT REQUIRED

Supplied with:
• Normally closed integrated micro switch
• optional universal actuator bracket for difficult installations
• Ideal for pantry/cupboard lighting

S14s

LED
TUBE500-LED-WW *Included*
• 880 total lm
• 8 Watts • 2,700K • CRI>80 • 270° Beam

S14S | LED ONLY | MAX. 10W | LED REPLACEABLE

SL-60-DS
• 595mmL x 34mmW x 60mmH

S14s

LED
TUBE300-LED-WW *Included*
• 450 total lm
• 4 Watts • 2,700K • CRI>80 • 270° Beam

S14S | LED ONLY | MAX. 7W | LED REPLACEABLE

SL-35- DS
• 395mmL x 31mmW x 60mmH

Xanthi LED Spotlights

See colour truer to life with a colouring index of CRI 90

• Trusted brand quality, Epistar LED chip • Each head has a 350° swivel and 90° tilt
• Safety certified - SAA approved driver in base • Available in painted satin gold, satin white or satin black finish

NEW GOLD

220V-240V

LSLX SERIES



LSLX-B3-BL



LSLX-B3-WH



LSLX-B3-GD



LSLX-B2-BL



LSLX-B2-WH

LSLX-B2-GD



LSLX-P1-BL



LSLX-P1-WH



LSLX-P1-GD

DISTANCE	LUX
1.5m	300 lux
2.4m	112 lux

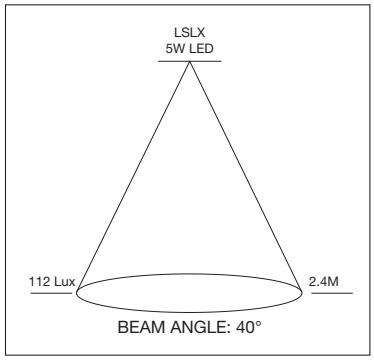

INTEGRAL LED
• 1425 total lm • 40° Beam
• 3x5 Watts • 3,000K • CRI>90

LSLX-B3
- 3 x 5 Watts
- 53mmØ shade
- 110mmØ mounting base
- 550mmL

INTEGRAL LED
• 950 total lm • 40° Beam
• 2x5 Watts • 3,000K • CRI>90

LSLX-B2
- 2 x 5 Watts
- 53mmØ shade
- 90mmØ mounting base
- 320mmL

INTEGRAL LED
• 475 total lm • 40° Beam
• 5 Watts • 3,000K • CRI>90

LSLX-P1
- 1 x 5 Watts
- 53mmØ shade
- 85mmØ mounting base

High Power LED Spotlights

Multi purpose high lumen output spotlights
- Bridgelux brand LED

LED HIGH POWER SPOTS



SC705-BL

INTEGRAL LED
- 1218 total lm • 20° Beam
- 12 Watts • 3,000K • CRI>90

SC705
- 360° swivel at base, head tiltable through 90°
- Driver integral in body
- Base 80mmØ
- Head 63mmØ x 158mmL



SC706-WH



SC706-BL

INTEGRAL LED
- 2509 total lm • 20° Beam
- 26 Watts • 3,000K • CRI>90

SC706
- 360° swivel at base, head tiltable through 95°
- Driver integral in body
- Base 80mmØ
- Head 85mmØ x 153mmL



SC4005

SC4005
- 40° degree optional reflector for SC705



SC4006

SC4006
- 40° degree optional reflector for SC706

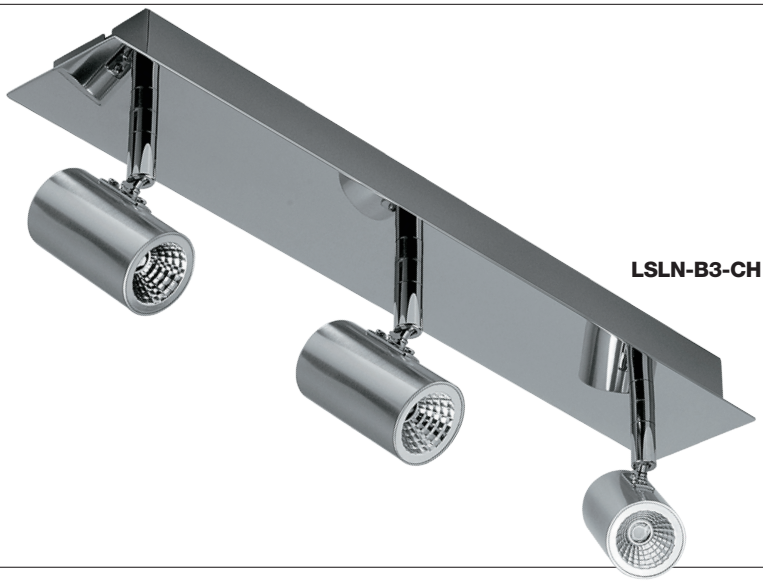

LSLN-B3-CH

INTEGRAL LED
- 720 total lm • 32° Beam
- 3x3 Watts • 3,000K • CRI>80

LSLN-B3-CH
- Chrome base with satin chrome head
- Shade 41mmØ
- 420mmL x 60mmW mounting base
- 120mm depth
- Integral driver in base
- 344 Lux @ 1m, 145 Lux @ 1.5m, 58 Lux @ 2.4m

Silo LED Spotlights

High power spotlights or surface mount downlights
• Integral driver in base • 24° beam angle

SILO SINGLE SPOT



INTEGRAL LED
• 1032 total lm • 24° Beam
• 10 Watts • 4,000K • CRI>80

SC616
Silo downlight/spotlight
• 360° swivel at base, head tiltable through 90°
• Driver integral in body
• Base 55mmØ
• Head 55mmØ x 90mmL

Sullivan LED SpotLights

Light switch dimmable - 3 levels
• Titlable • Swivel heads • Supplied with driver in base • 40° at half-light beam angle

SULLIVAN


LSLS-P1-WH


LSLS-P3-WH


LSLS-B4-WH

INTEGRAL LED
• 350 total lm • Dimmable • 40° Beam
• 4 Watts • 3,000K • CRI>80

LSLS-P1-WH
Sullivan single switched spotlight
• 51mmØ shade
• 91mmØ base mount
• Switch on base plate

INTEGRAL LED
• 1050 total lm • Dimmable • 40° Beam
• 3 x 4 Watts • 3,000K • CRI>80

LSLS-P3-WH
Sullivan 3 light pan spotlight
• 51mmØ shade
• 200mmØ base mount

INTEGRAL LED
• 1400 total lm • Dimmable • 40° Beam
• 4 x 4 Watts • 3,000K • CRI>80

LSLS-B4-WH
Sullivan 4 light bar spotlight
• 51mmØ shade
• 91mmØ base mount
• 770mmL x 130mmD

Callen LED Spotlights

High power LED spotlights with wide 70° beam angle, with lots of extra spill light perfect for general room lighting

• 3,000K warm white colour temperature • Integral driver supplied in base

220V-240V

LSLC SERIES



LSLC-P1-CH



LSLC-B2-CH



LSLC-B4-CH

DISTANCE	LUX
1m	350 lux
1.5m	165 lux
2.4m	60 lux

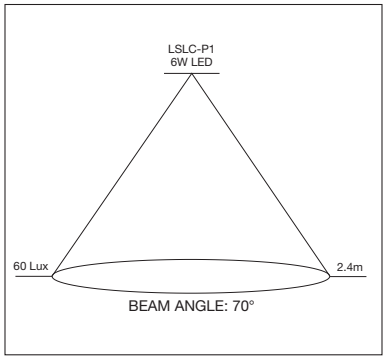

INTEGRAL LED
• 528 total lm • 70° Beam
• 6 Watts • 3,000K • CRI>80

LSLC-P1-CH
- Chrome base with triplex acid glass shades
- 80mmØ shade
- 100mmØ mounting base

INTEGRAL LED
• 1056 total lm • 70° Beam
• 2x6 Watts • 3,000K • CRI>80

LSLC-B2-CH
- Chrome base with triplex acid glass shades
- 80mmØ shade
- 120mmØ mounting base
- 362mm length

INTEGRAL LED
• 2112 total lm • 70° Beam
• 4x6 Watts • 3,000K • CRI>80

LSLC-B4-CH
- Chrome base with triplex acid glass shades
- 80mmØ shade
- 120mmØ mounting base
- 762mm length

Tabitha LED Spotlights

High power LED spotlights with wide 50° beam angle, with lots of extra spill light perfect for general room lighting

• 3,000K warm white colour temperature • Integral driver supplied in base

220V-240V

LSLT SERIES



LSLT-P1-CH



LSLT-B3-CH



LSLT-P4-CH

DISTANCE	LUX
1m	350 lux
1.5m	165 lux
2.4m	52 lux

INTEGRAL LED
• 528 total lm • 50° Beam
• 6 Watts • 3,000K • CRI>80

LSLT-P1-CH
- Chrome base with acid glass shade
- Individually switched
- Ideal as a bedside light
- 60mmØ shade
- 100mm square mounting base

INTEGRAL LED
• 1584 total lm • 50° Beam
• 3x6 Watts • 3,000K • CRI>80

LSLT-B3-CH
- Chrome base with acid glass shades
- 60mmØ shade
- 390mmL x 50mmW mounting base

INTEGRAL LED
• 2112 total lm • 50° Beam
• 4x6 Watts • 3,000K • CRI>80

LSLT-P4-CH
- Chrome base with acid glass shades
- 60mmØ shade
- 210mmL x 210mmW mounting base

Roscoe LED Spotlights

High power LED spotlights with 40° beam angle

• 3,000K warm white colour temperature • Integral driver supplied in base

220V-240V

LSLR SERIES



LSLR-P1-SC



LSLR-B2-SC



LSLR-B3-SC



INTEGRAL LED

• 528 total lm • 40° Beam
• 6 Watts • 3,000K • CRI>80

LSLR-P1-SC

- Satin chrome base with metal reflector and acrylic double shade
- 80mmØ shade
- 100mmØ mounting base

INTEGRAL LED

• 1056 total lm • 40° Beam
• 2x6 Watts • 3,000K • CRI>80

LSLR-B2-SC

- Satin chrome base with metal reflector and acrylic double shade
- 80mmØ shade
- 120mmØ mounting base
- 365mmL

INTEGRAL LED

• 1584 total lm • 40° Beam
• 3x6 Watts • 3,000K • CRI>80

LSLR-B3-SC

- Satin chrome base with metal reflector and acrylic double shade
- 80mmØ shade
- 120mmØ mounting base
- 545mmL

Kade GU10 Spotlights

Dimmable
• No control gear required • Adjustable directional heads • Available in black or white • Metal body with 60mmØ glass shade

BLACK



SK-B1-BL



SK-B2-BL



SK-B3-BL

WHITE



SK-B1-WH



SK-B2-WH



SK-B3-WH

GU10

LED
GU10D-NBLED-WW



• 580 total lm • Dimmable
• 6.5 Watts • 2,700K • CRI>90 • 24° Beam

LED
GU10-WBLED-WW



• 510 total lm
• 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 | MAX. 10W | 220V-240V | LED REPLACEABLE

SK-B1
Kade single
• 100mmL x 60mmW mounting base
• Switch incorporated in base

SK-B2
Kade double bar
• 260mmL x 46mmW mounting base

SK-B3
Kade triple bar
• 390mmL x 46mmW mounting base

Jessie GU10 Spotlights

Inconspicuous turn and tilt mechanism

• Turns 350° and tilts 90° • No control gear required • Die cast metal construction
• Available in white or black • Dimmable • Spot head 55mmØ x 78mmL

NEW BLACK



SJ-P1-WH



SJ-P1-BL



SJ-B2-WH



SJ-B2-BL



SJ-P3-WH



SJ-P3-BL



SJ-B4-WH



SJ-B4-BL

GU10

LED
GU10D-NBLED-WW



• 580 total lm • Dimmable
• 6.5 Watts • 2,700K • CRI>90 • 24° Beam

LED
GU10-WBLED-WW



• 510 total lm
• 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 | MAX. 10W | 220V-240V | LED REPLACEABLE

SJ-P1
Jessie single
• Mounting base 120mmL x 70mmW

SJ-B2
Jessie double bar
• Mounting base 320mmL x 70mmW

SJ-P3
Jessie triple pan
• Mounting base 210mmØ

SJ-B4
Jessie four bar
• Mounting base 760mmL x 70mmW

Reagan GU10 Spotlights

- Spot heads turn 360° and tilt 200° • No control gear required • Metal construction
- 65mmØ shades • Available in white or black satin paint finish • Dimmable • Ceiling or wall mount
- Product designed to extend LED lamp life; with its aluminium head and fixed lamp holder for maximum heat sinking



SR-P1-WH



SR-P1-BL



SR-B2-WH



SR-B2-BL



SR-P3-WH



SR-P3-BL



SR-B3-BL



SR-B3-WH

GU10

LED
GU10D-NBLED-WW



- 580 total lm • Dimmable
- 6.5 Watts • 2,700K • CRI>90 • 24° Beam

LED
GU10-WBLED-WW



- 510 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 | MAX. 10W | 220V-240V | LED REPLACEABLE

SR-P1
Reagan single
- Mounting base 80mmL x 50mmW

SR-B2
Reagan double bar
- Mounting base 280mmL x 50mmW

SR-B3
Reagan triple bar
- Mounting base 420mmL x 50mmW

SR-P3
Reagan triple pan
- Mounting base 190mmØ

LONGER LAMP LIFE



- Fixed lamp holder for efficient heat sinking
- Maximises contact points to keep LED cooler

GU10 Spotlights

No control gear required • Adjustable directional heads



GU10

LED
GU10-HPLED-WH



- 520 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

LED
GU10D-NBLED-WW



- 580 total lm • Dimmable
- 6.5 Watts • 2,700K • CRI>90 • 24° Beam

GU 10 | MAX. 50W | 220V-240V | LED REPLACEABLE

SN-B2-CH
- Chrome plated
- Mounting plate 100mm x 100mm
- Length 406mm

SZ-B2-SC
- Base 380mmL x 53mmW

SZ-B3-BL
- Base corner to corner: 280mmL

GU 10 | 75 Watt

SX-B2-SC
- Base 380mmL x 54mmW

GU 10 | MAX. 50W | 220V-240V | LED REPLACEABLE

SA-B4-BS
- Ceiling or wall mount
- Flexi-joints allows for mounting in any configuration
- Overall length 1300mm

Mains Powered Dimmable Spotlights

No control gear required
- LED replaceable bulbs

SS SERIES



GU10

LED
GU10-HPLED-WH
- 520 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

LED
GU10D-NBLED-WW
- 580 total lm • Dimmable
- 6.5 Watts • 2,700K • CRI>90 • 24° Beam

GU 10 | 220V-240V | MAX. 50W | LED REPLACEABLE

SS-B2-CH
- Chrome
- Base 380mmL x 38mmW

SS-P1-CH
- Chrome
- Base 75mmØ

SS-P4-CH
- Chrome
- Base 230mmØ

DOUBLE INSULATED

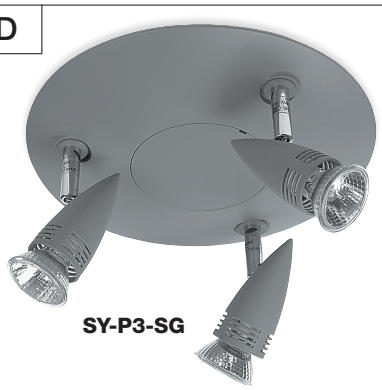

GU 10 | 220V-240V | MAX. 50W | LED REPLACEABLE

SY-P3-SG
- Base 260mmØ

REFLECTOR SPOTLIGHTS

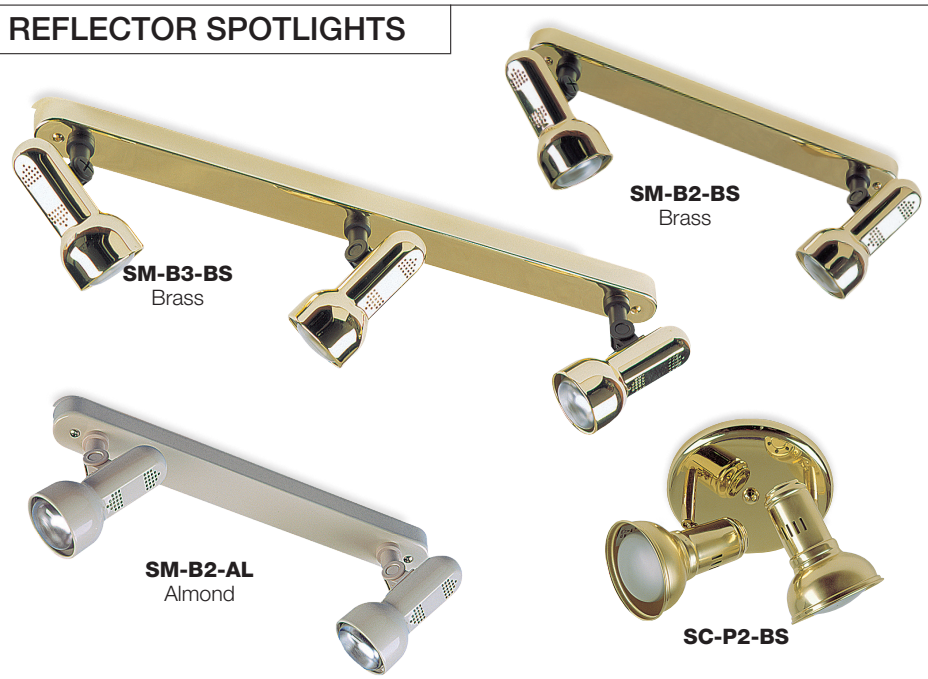

R50 | MAX. 40W | E14

SM-B3-BS
- Brass
- Base 560mmL x 45mmW

SM-B2-BS
- Brass
- Base 360mmL x 40mmW

SM-B2-AL
- Almond cream
- Base 360mmL x 40mmW

E27 | R80 | MAX. 100W | LED REPLACEABLE

SC-P2-BS
- Brass
- Base 190mmØ

White TK Series Track Spotlights

High quality components, performance and reliability

• Metal swivel arm, quality powder coating and wide range of styles and applications

LED



LED

TKL401-WH
- 9 Watt LED
- 3,000K
- 777 lumens
- 38° beam angle
- CRI 90
- Luminus™ chip



LED

TKL503-WH
- 15 Watt LED
- 3,000K
- 1217 lumens
- 20° beam angle
- CRI 90
- Luminus™ chip



LED

TKL706-WH
- 24 Watt LED
- 4,000K
- 2,702 lumens
- 24° beam angle
- CRI 90
- Luminus™ chip
- Accessory 40° beam reflector available (SC4006)

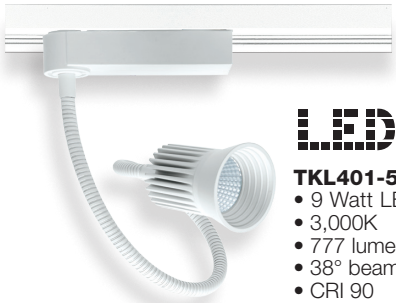

LED

TKL401-500-WH
- 9 Watt LED
- 3,000K
- 777 lumens
- 38° beam angle
- CRI 90
- Luminus™ chip

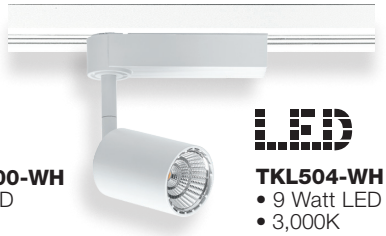

LED

TKL504-WH
- 9 Watt LED
- 3,000K
- 777 lumens
- 38° beam angle
- CRI 90
- Luminus™ chip

MR16



TK21-WH

MR16

LED
MR16D-WBLED-WW



• 580 total lm • Dimmable
• 6.5 Watts • 3,000K • CRI>90 • 36° Beam

MR16 | 12V | MAX. 50W | LED REPLACEABLE

PAR 38



TK121-WH

E27

LED
PAR38-15WLED-DL



• 1200 total lm • IP65 • Dimmable
• 15 Watts • 5,000K • CRI>80 • 40° Beam

E27 | PAR 38 | 220V-240V | MAX. 150W | LED REPLACEABLE

Please note. Heavy duty use of white halogen fittings will cause discolouring of fixture over time

Black TK Series Track Spotlights

High quality components, performance and reliability

- Metal swivel arm, quality powder coating and wide range of styles and applications

LED



LED

TKL401-BL
- 9 Watt LED
- 3,000K
- 777 lumens
- 38° beam angle
- CRI 90
- Luminus™ chip



LED

TKL503-BL
- 15 Watt LED
- 3,000K
- 1217 lumens
- 20° beam angle
- CRI 90
- Luminus™ chip



LED

TKL504-BL
- 9 Watt LED
- 3,000K
- 777 lumens
- 38° beam angle
- CRI 90
- Luminus™ chip



LED

TKL706-BL
- 24 Watt LED
- 4,000K
- 2,702 lumens
- 24° beam angle
- CRI 90
- Luminus™ chip
- Accessory 40° beam reflector available (SC4006)

MR16



TK21-BL

MR16

LED

MR16D-WBLED-WW



- 580 total lm • Dimmable
- 6.5 Watts • 3,000K • CRI>90 • 36° Beam

MR16 | 12V | MAX. 50W

Silver TK Series Track Spots

High quality components, performance and reliability

- Metal swivel arm, quality powder coating and wide range of styles and applications

LED



LED

TKL503-SI
- 15 Watt LED
- 3,000K
- 1217 lumens
- 20° beam angle
- CRI 90
- Luminus™ chip



LED

TKL202-SI
- 14 Watt LED
- 3,000K
- 1222 lumens
- 24° beam angle
- CRI 90
- Zigen™ chip

DIMMABLE MAINS VOLTAGE



TK123-SI

E27

LED
PAR30-LED-WW



• 900 total lm • Dimmable
• 11 Watts • 3,000K • CRI>80 • 35° Beam

TK123-SI

E27 | PAR 30 | MAX. 100W | 220V-240V | LED REPLACEABLE

PENDANT

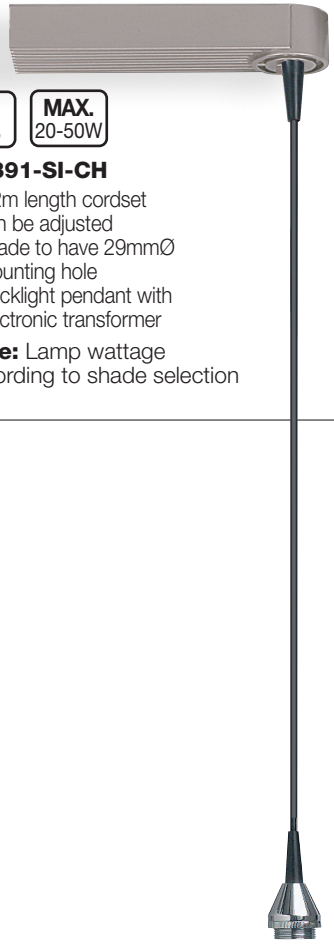

G 5.3 | MAX. 20-50W

TK391-SI-CH
- 1.2m length cordset can be adjusted
- Shade to have 29mmØ mounting hole
- Tracklight pendant with electronic transformer

Note: Lamp wattage according to shade selection

Tracklight Pendants

Refer to "Shades and Suspensions" section for the full range



MS190-WH
Cone shade
H=90
D=190



Q541-GN
H= 120
D= 100



MSC-CO
Cone shade
H=80
D=155



MSC-BL
Cone shade
H= 80
D=155

TK Series Tracks & fittings

Customise your track layout

TK TRACKS

- 220V-240V power supply
- Tracks include 1 x TK-END and 1 x end cap
- TK track is earthed



Style		Amps	No. of Heads
LED	9 Watt	0.06	60
LED	15 Watt	0.07	50
LED	25 Watt	0.12	50
12Volt	50 Watt	0.22	30
R80	100 Watt	0.42	16
PAR30	100 Wat	0.42	16
PAR38	150 Watt	0.64	10

Fitting the Lamp Heads

- Maximum capacity of track is 7 AMPS in one run of connected track
- For number of heads per run see chart (right)
- TK heads are double insulated

Spotlight track black
TK-2000-BL (2 metres)
TK-1000-BL (1 metre)

Spotlight track silver
TK-2000-SI (2 metres)
TK-1000-SI (1 metre)

Spotlight track white
TK2000-WH (2 metres)
TK1000-WH (1 metre)

TK-ROD1000

- Suspension rod designed to fit TK series track
- 1000mm L

NEW



TK TRACK ACCESSORIES


TK-CROSS-WH


TK-CROSS-BL


TK-CORNER-WH


TK-CORNER-SI


TK-CORNER-BL


TK-TEE-WH


TK-TEE-SI


TK-TEE-BL


TK-JOIN-WH


TK-JOIN-SI


TK-JOIN-BL

Examples of track joiner arrangements

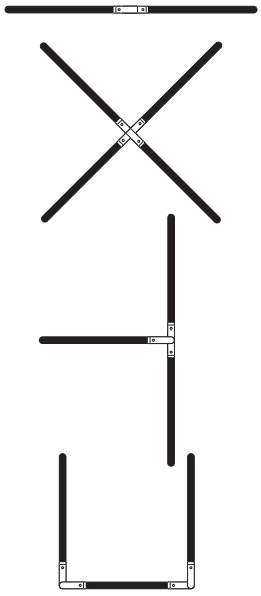

DF-WIRE

- 1x 2 metre wire with 1x ceiling mount 1x glider and 2x M10 nuts
- Adjustable length from zero to 2 metres
- Attractive chrome 2 piece ceiling mounts. Can be screwed from below or bolted from above ceiling




TK-END-WH


TK-END-SI


TK-END-BL

Use to join multiple track sections using flexible cable

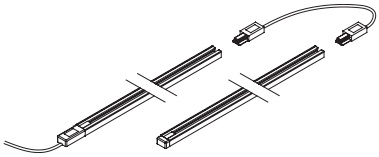

Rapid Secure Suspension System

1.5mmØ steel wire and suspension parts
- All gliders have a safety lock nut to safely and permanently set installation at desired height
- Weight restrictions 15kgs per wire



RS2001-1
RS2001-2
RS2001-3
RS2001-4



RS2001-50

SUSPENSION WIRES
- 1.5mmØ galvanized steel wire with die cast end
- Sold in packs of 10
- 1, 2, 3, and 4 metres lengths available

RS2001-1 1 metre x 10
RS2001-2 2 metre x 10
RS2001-3 3 metre x 10
RS2001-4 4 metre x 10
RS2001-50 1 x 50 metre roll



RS2002

RS2002
- Ceiling mount
- Pack of 10
- 2 piece ceiling mount, to secure screw through from the bottom or bolt from the top through ¼ inch thread.



RS2003



RS2004

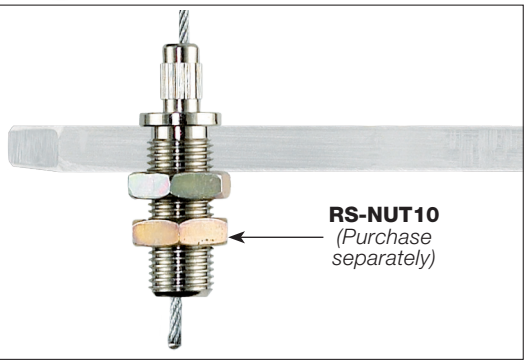

RS-NUT10
(Purchase separately)

RS2003
- Recessed glider
- 10mm x 15mm thread
- Pack of 10

RS2004
- Recessed glider
- 10mm x 25mm thread
- Pack of 10





RS2005



RS2005
- Recessed glider with side cable exit
- 10mm x 15mm thread
- Pack of 10





RS2006



RS2006
- Display glider with cross hole
- For suspension of vertical lighting products such as LED panels etc
- Pack of 10

Rapid Secure Suspension System

1.5mmØ steel wire and suspension parts



RS2007
- Glider with side exit
- Internal 6mm x 6mm thread
- Pack 10



RS2008
- Swivel glider
- To hold materials of up to 6mm thick at angle adjacent to horizontal plane
- Pack of 10



RS2009
- Glider with side exit
- 3 x cable exit
- Pack of 10



RS2010
- Glider with side exit
- 4x cable exit
- Pack of 10

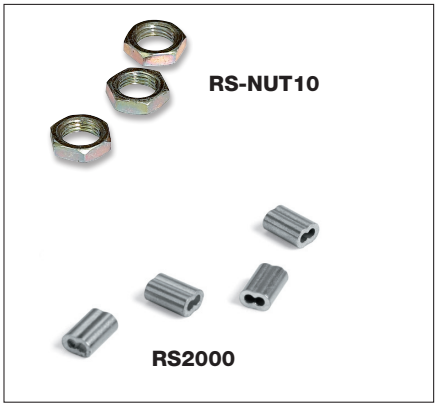

RS-NUT10
- M10 nut for gliders
- Pack of 10

RS2000
- Aluminium crimp
- Pack of 50

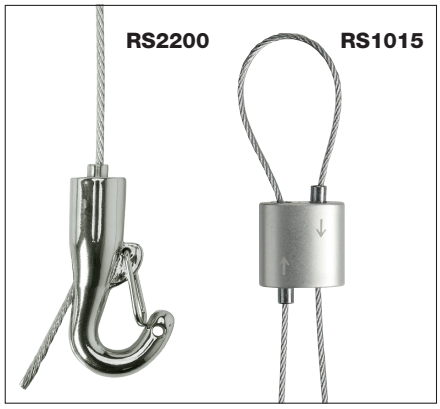

RS2200
- Glider with hook
- Pack of 10

RS1015
- Double glider
- Pack of 10



GS-03
- For cutting rapid secure suspension wires
- Circular cutting motion gives a precise cut with no fraying
- Max capacity 4.5mmØ wire rope
- Overall length 190mm

MR16 12Volt Spotlights

Moveable spot heads
- Easy to place light where required

ROPE LIGHT KITSET



NEW



SV-ROPE5-98
5 head set



MR16 | 5x 5W | 12V | LED REPLACEABLE

SV-ROPE5-98
- 5 heads
- 10m cable = 5m span when installed
- Rope cable is 2.3mm3 tinned multistrand 3mmØ over clear sheathing
- 30 Watt LED driver included
- All hooks and fittings included, adjustable turn buckles etc
- Bulbs included: 3,000K 5 Watt LED

FLEXIBLE TRACK KITSET



SV-FLEXO-3

MR16 | MAX. 20W | 12V | LED REPLACEABLE

SV-FLEXO-3
- 1.6 metre total length
- Flexible track application
- 20-70W electronic transformer included
- Halogen lamps included



ST-B1-CH

MR16 | MAX. 50W | LED REPLACEABLE

ST-B1-CH
- Display spot light
- Chrome plated
- 120mmW x 440mmH x 270mmD
- Includes transformer in base
- Head placement adjustable slides along bar
- Mounting base 120mmH x 75mmW

MR16
LED
MR16-HPLED-WW



- 350 total lm
- 5 Watts • 3,000K • CRI>80 • 38° Beam

Contemporary LED Wall Lights

High power Indirect lighting

ERICA

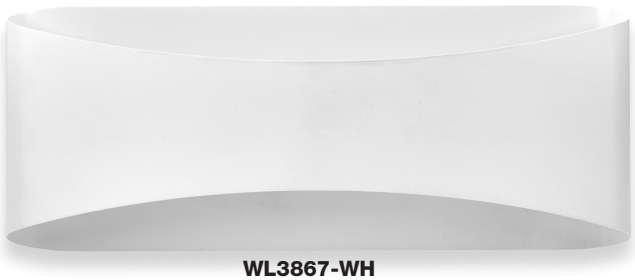

WL3867-WH

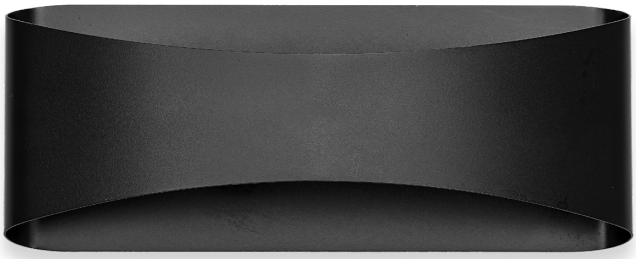

WL3867-BL



WL3867-GD

INTEGRAL LED
• 732 total lm
• 12 Watts • 3,000K • CRI>80 • Dimmable

WL3867
Erica LED wall light
- Up and Down lighter
- 12 Watt high power integral LED
- Aluminium
- 300mmW x 130mmH x 95mmD
- Mounting base 180mmW x 60mmH
- Available in white, black or gold painted finish

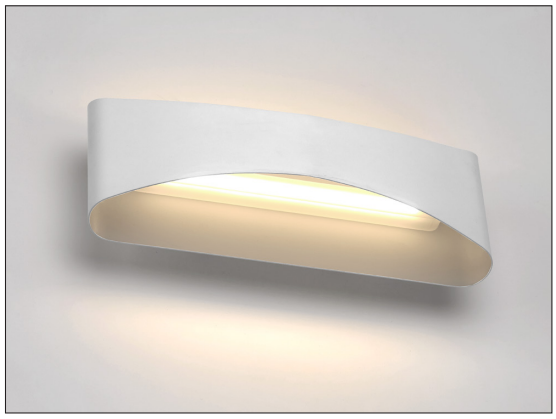

MILUN

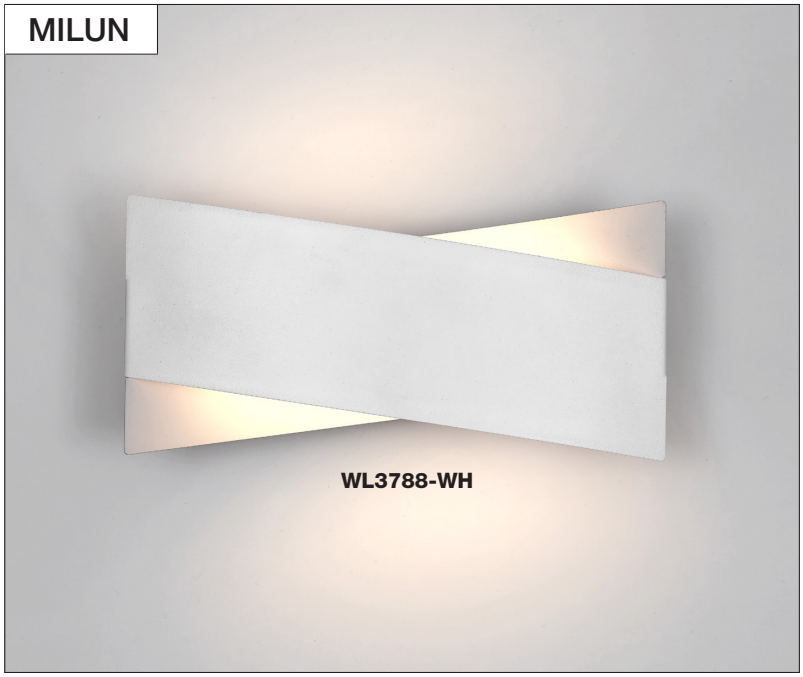

WL3788-WH

INTEGRAL LED
• 890 total lm
• 18 Watts • 3,000K • CRI>80

WL3788-WH
Milun LED wall light
- Up and Down lighter
- 18 Watt high power integral LED
- Aluminium with white paint finish
- 250mmW x 120mmH x 76mmD
- Mounting base 150mmW x 50mmH

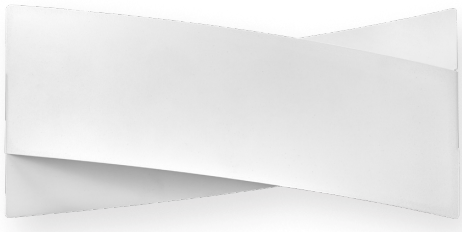

Contemporary LED Wall Lights

Made from extruded aluminium



WL170-WH

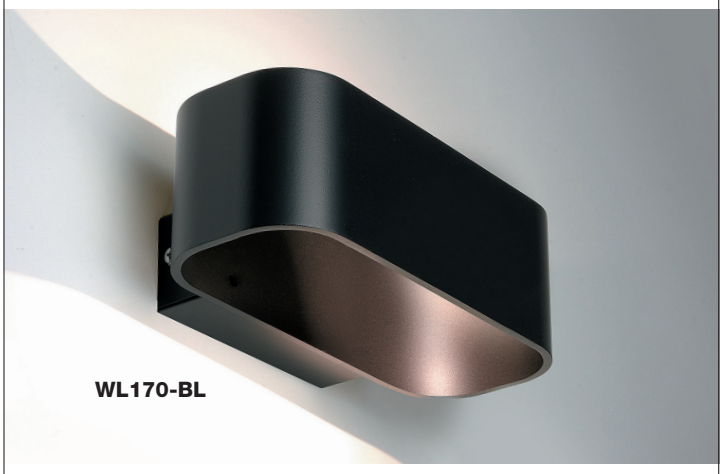

WL170-BL

INTEGRAL LED
• 350 total lm
• 5 Watts • 3,000K • CRI>80

WL170
Kolton LED wall light

- 5Watt high power integral LED similar light output to a 50 Watt halogen
- Extruded aluminium with white or black paint finish
- 188mmW x 67mmH x 105mmD
- Driver included in base



WL167-WH

INTEGRAL LED
• 350 total lm
• 5 Watts • 3,000K • CRI>80

WL167
CUBE LED wall light

- 100mmW x 100mmD x 62mmH
- 5 Watt high power integral LED similar light output to 50 Watt halogen
- Extruded aluminium with white paint finish
- Driver included in base

Glass LED Wall Lights

Perfect for overall room lighting or accent lighting

NORDICA



WL1273-BL



WL1273-SC



WL1273-WH

INTEGRAL LED
• 720 total lm
• 8 Watts • 3,000K • CRI>80

WL1273
- Nordica 8 Watt LED wall light
- Available in black, satin chrome or white
- Glass
- 250mmH x 200mmW x 75mmD

ALDO



WL1674-CH



WL1674-WH

INTEGRAL LED
• 1080 total lm
• 12 Watts • 3,000K • CRI>80

WL1674
- Aldo 12 Watt LED wall light
- Available in chrome or white edge
- Glass
- 290mmH x 160mmW x 100mmD

Metal LED Wall Lights

High power Indirect lighting

ROHAN

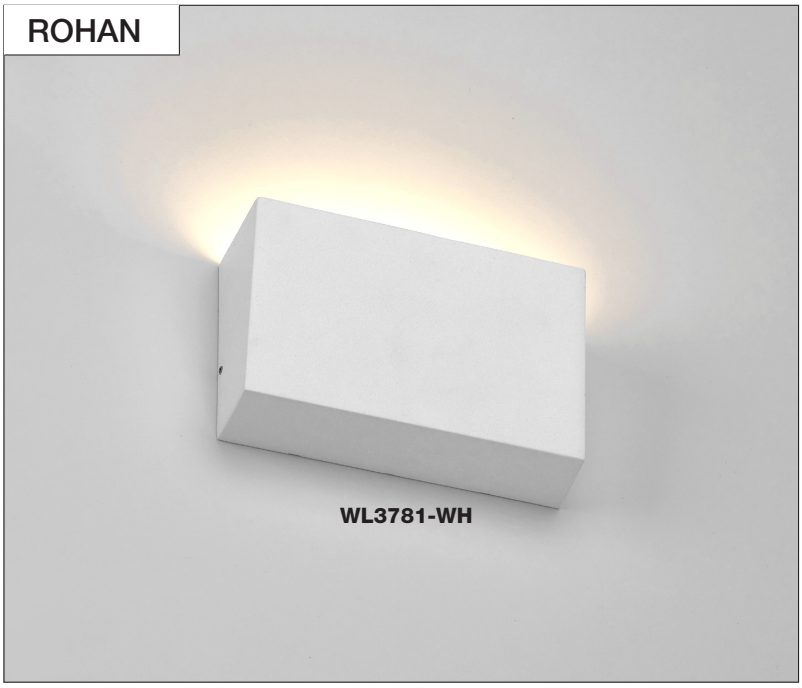

INTEGRAL LED
• 767 total lm
• 10 Watts • 3,000K • CRI>80

WL3781-WH
Rohan LED wall light
- Up or Down lighter
- 10 Watt high power integral LED
- Aluminium with white paint finish
- 160mmW x 100mmH x 50mmD
- Completely sealed design



CANTARA



INTEGRAL LED
• 571 total lm
• 13 Watts • 3,000K • CRI>80

WL1091-WH
Cantara LED wall light
- Up and Down lighter
- 13 Watt high power integral LED
- Aluminium with white paint finish
- 310mmW x 70mmH x 80mmD
- Completely sealed glass top and bottom

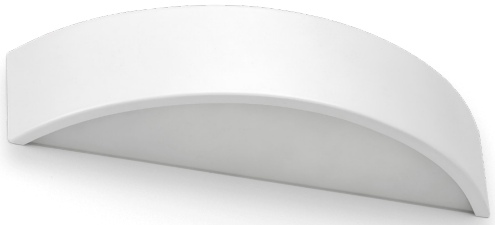

Zuri LED Wall Lights

Seamless extruded aluminium construction

UP AND DOWN LIGHTER

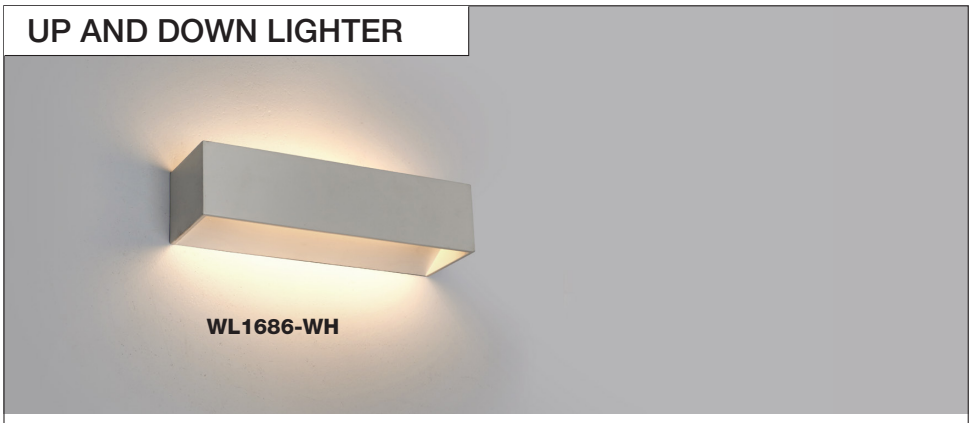

INTEGRAL LED
• 730 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80

WL1686
- 8 Watt high power integral LED
- Aluminium with white paint finish
- 250mmW x 70mmH x 85mmD
- Driver included in base



INTEGRAL LED
• 960 total lm • Dimmable
• 12 Watts • 3,000K • CRI>80

WL1687
- 12 Watt high power integral LED
- Aluminium with white paint finish
- 585mmW x 70mmH x 85mmD
- Driver included in base

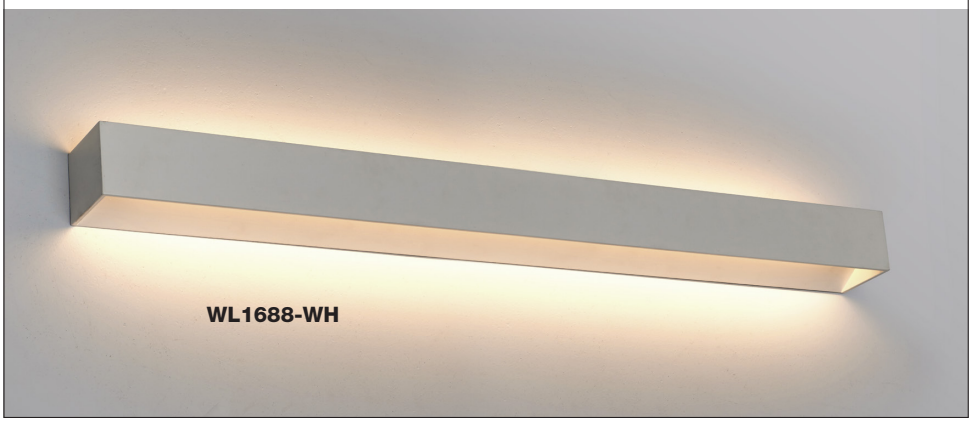

INTEGRAL LED
• 1560 total lm
• 24 Watts • 3,000K • CRI>80

WL1688
- 24 Watt high power integral LED
- Aluminium with white paint finish
- 900mmW x 70mmH x 85mmD
- Non-Dimmable driver included in base

Plaster Wall Lights

Can be painted to suit your decor



WL8189



WL1602



WL1606

E27

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | 220V-240V | LED REPLACEABLE

WL8189
Curina up & down lighter
• 310mmW x 110mmH x 150mmD
• Opaque glass lens at bottom

WL1602
• 130mmH x 280mmW x 140mmD

WL1606
• 110mmH x 355mmW x 110mmD



WL1647 Wall



WL1669 Corner

R7s 78mm

LED
LEDLIN78-6



• 600 total lm
• 6 Watts • 3,000K • CRI>80 • 360° Beam

R7s 78 | MAX. 100W | 220V-240V

WL1647
• 150mmH x 275mmW x 140mmD

WL1669
• 150mmH x 250mmW x 140mmD

METAL

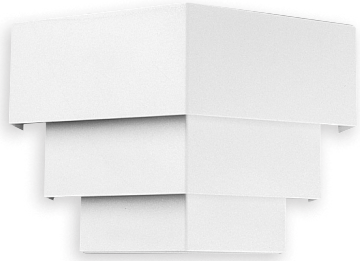

WL-201

B22

LED
GLSD-6BWW



• 450 total lm • Dimmable
• 6 Watts • 3,000K • CRI>81 • 270° Beam

B22 | MAX. 100W | LED REPLACEABLE

WL-201
• Fabricated metal wall light
• White
• 250mm x 170mm

Plaster Wall Lights

Paintable to suit your decor



INTEGRAL LED
• 291 total lm
• 3 Watts • 3,000K • CRI>80

WL8445
Dottie plaster wall light
• 150mmØ x 46mmD
• Can be wall or ceiling mounted



INTEGRAL LED
• 565 total lm
• 7 Watts • 3,000K • CRI>80

WL8446
Dot plaster wall light
• 260mmØ x 50mmD
• Can be wall or ceiling mounted





INTEGRAL LED
• 410 total lm
• 2 X 3 Watts • 3,000K • CRI>80

WL8339
Quade square plaster light
• Up and downlighter
• 125mmW x 123mmH x 60mmD

INTEGRAL LED
• 509 total lm
• 2 X 3 Watts • 3,000K • CRI>80

WL8429
Retho rectangular plaster light
• Up and downlighter
• 100mmW x 158mmH x 55mmD



G9 | MAX. 40W | LED REPLACEABLE

WL8436
• 146mmH x 110mmW x 125mmD

G9

LED
G9-3WLED-WW



• 350 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

HALOGEN
G9-40F



• 400 total lm • Dimmable
• 40 Watts • 3,000K • CRI>100

Minimalist Glass Wall Lights

Add flare with colour

PETITE



WLS9287-RD



WLS9287-WH

G9

LED

G9-3WLED-WW



- 350 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam

G9 | MAX. 50W | 220V-240V | LED REPLACEABLE

WLS9287

- Up and downlighting effect
- 110mmØ x 140mmH
- Red and white are translucent
- Gloss finish
- Square chrome mounting 53mm x 83mm

GRAND



WLL9287-BL



WLL9287-RD

G9 | MAX. 50W | 220V-240V | LED REPLACEABLE

WLL9287

- Up and downlighting effect
- 110mmØ x 240mmH
- Red is translucent
- Black is opaque
- Gloss finish
- Square chrome mounting 53mm x 83mm

GLASS WALL LIGHTS



WL 4046 MX

R7's 78mm

LED

LEDLIN78-6



- 600 total lm
- 6 Watts • 3,000K • CRI>80 • 360° Beam

R7s 78 | MAX. 100W | 220V-240V

WL 4046 MX

- Curved matrix glass
- 200mmW x 71mmD x 215mmH
- Mounting base 120mmH x 176mmW

Euro Wall Lights

Quality glass fixtures
- No control gear required



E14

LED
CANC-4SEWW
- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

3x E14 MAX. 60W 220V-240V LED REPLACEABLE

WL3413
- 585mmL X 150mmW X 110mmH

E27 MAX. 60W LED REPLACEABLE

E14 MAX. 40W 220V-240V LED REPLACEABLE

WL362
- Uplight and downlight
- Satin nickel detail with Acid glass
- 260mmW x130mmD x 420mmH
- E14 bottom lamp holder 40 Watt max
- E27 top lamp holder 60 Watt max

E27

LED
GLSW-8EWW
- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 MAX. 60W 220V-240V LED REPLACEABLE

WL2198
- 280mmH x 150mmW x 74mmD
- Opal white glass



E14

LED
CANC-4SEWW
- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 MAX. 60W LED REPLACEABLE

WL3371
- 265mmH x 120mmW x 170mmD
- Base 110mm square
- Satin chrome & black base with opal glass

E14 MAX. 60W LED REPLACEABLE

WL3361
- 150mmW x 150mmH x 180mmD
- Base 100mmW x 140mmH
- Pull cord switch
- Silver with opal glass shade

Contemporary Wall Lights

Ideal for bedside lighting

KIYO FLEXI STEM SPOTLIGHT

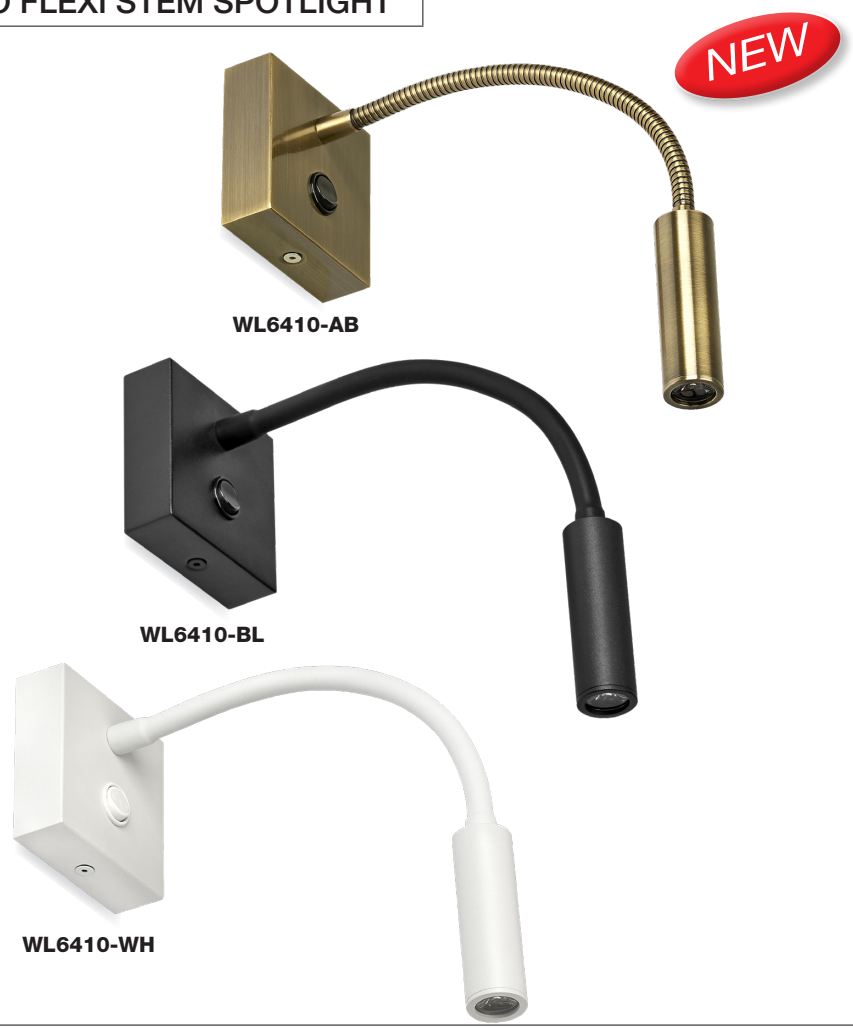

INTEGRAL LED
• 200 total lm • 17° Beam
• 3 Watts • 3,000K • CRI>80

WL6410
Kiyo LED spotlight
- Easy to adjust flexible stem
- Switch on base
- Integral LED Driver in base
- 320mm long stem including head
- 80mm Sq mounting base
- 25mmØ spot head
- Available in Antique brass, black or white
- Made from steel
- Black and white models have soft, smooth plastic coating on arms

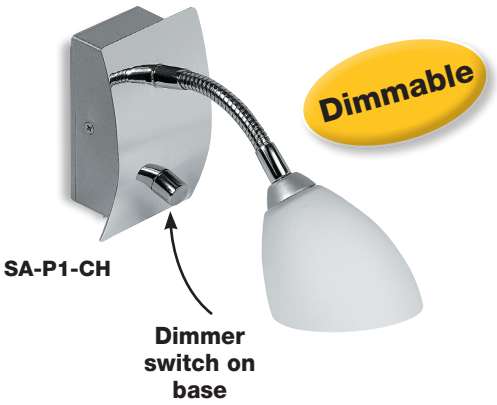

G9

HALOGEN
G9-40F



• 400 total lm • Dimmable
• 40 Watts • 3,000K • CRI>100

G9 | MAX. 40W | 220V-240V

SA-P1-CH
- Chrome and opal glass
- With dimmer switch
- 100mmL x 50mmW mounting

LED Bedside Task Lights

Switch and light in one
- Heads turn 300° and tilt up to 90°

AMARI LIGHT



WL6010-BL



WL6010-WH

INTEGRAL LED
- 208 total lm • 20° Beam
- 3 Watts • 3,000K • CRI>80

WL6010
- LED bedside light
- Individually switched
- Base 50mmW x 110mmH
- Fitting 70mm Depth
- Metal with painted finish
- Samsung LED brand

AURA LIGHT WITH USB



WL7031-BL



WL7031-WH

Spot:

INTEGRAL LED
- 208 total lm • 20° Beam
- 3 Watts • 3,000K • CRI>80

Back light:

INTEGRAL LED
- 867 total lm
- 12 Watts • 3,000K • CRI>80

WL7031
- LED bedside spot with ambient backlight
- Spot and back light are Individually switched
- Base 100mmW x 155mmH
- Fitting 80mm Depth
- Metal with painted finish
- USB for charging only 5V 2A
- Samsung & Edison LED brand

BRIGHT 12W Wall Lighting



Swing Arm Wall Brackets

Choose from 3 models with on-off switch
- Shades not included

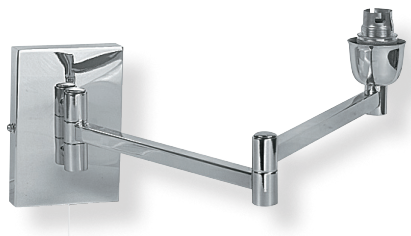

PD8163-CH

B22 | MAX. 100W | LED REPLACEABLE

PD8163-CH
- Chrome
- 455mm when fully extended
- Base 90mmW x 130mmH



Adjustable model –
swing both arms to any position

B22

LED
GLSD-6BWW



- 450 total lm • Dimmable
- 6 Watts • 3,000K • CRI>81 • 270° Beam

LED
SMR-5BWW



- 425 total lm
- 5 Watts • 3,000K • CRI>80 • 210° Beam



PD35-WH

B22 | MAX. 100W | LED REPLACEABLE

PD35
- Available in white
- 350mm
- Base 120mmØ

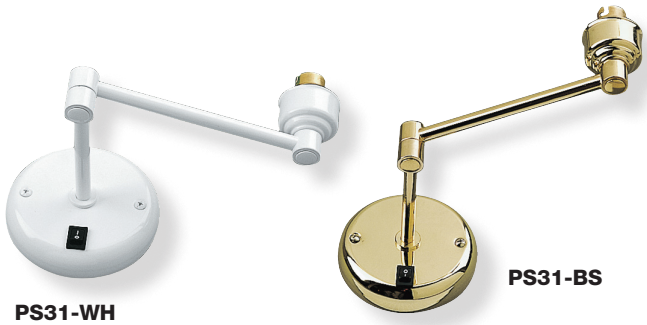

PS31-WH

PS31-BS

B22 | MAX. 100W | LED REPLACEABLE

PS31
- White or brass
- Arm length 310mm
- Base 120mmØ



Fixed arm model –
swing outer arm only to any position

EXAMPLES SHOWN WITH SHADE

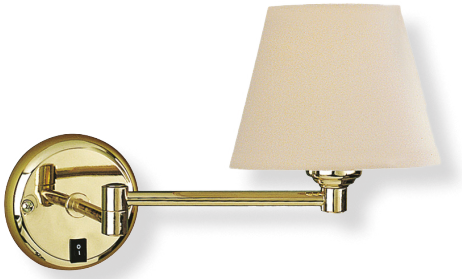

PS31-BS
310mm brass
Shown with material shade

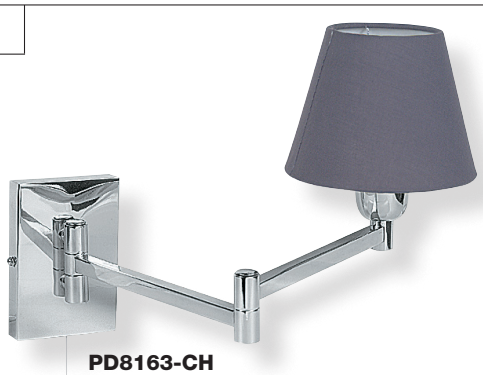

PD8163-CH
455mm chrome
Shown with shade FS6 (grey)
use small round bulbs with FS6 shade

Bedside Lights

Easy to adjust flexible stems

• Multifunctional lights use the main shade general room lighting with flexi spot for task lighting

220V-240V

MADDOX WALL LIGHT



WL6519-AB

WL6519-SC



FS21-MM



FS21-GY

E27

LED
GLS-9EWW



• 820 total lm
• 9 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | LED REPLACEABLE

WL6519

- Double switched - shade or spot light can be turned on/off separately
- Rocker switches located on top edge of base
- Supplied with white fabric shade only
- Available in Antique brass or Satin chrome
- 260mmH x 200mmW x 260mmD
- Mounting base 130mmW x 80mmH

Flexi Spot

INTEGRAL LED
• 75 total lm • 25° Beam
• 1 Watt • 6,000K • CRI>80

FS21

- Cuboid style fabric shade
- Available in mushroom or seal grey
- Fits B22, E14 or E27 lampholders
- 200mmL x 100mmW x 150mmH

DAWSON WALL LIGHT



WL2252-WH

E27

LED
GLS-9EWW



• 820 total lm
• 9 Watts • 3,000K • CRI>80 • 240° Beam

Main shade: E27 | MAX. 60W | LED REPLACEABLE

WL2252-WH

- Fabric shade 220mmØ x 160mmH
- Mounting base 120mmH x 80mmW
- 260mm depth
- Flexible LED arm 320mm overall length including head
- LED flexi spot 1925 lux at 0.5 metres 540 lux at 1 metre
- Shade & LED stem switched separately at base switches

Flexi Spot

INTEGRAL LED
• 80 total lm • 18° Beam
• 1 Watt • 3,000K • CRI>81

Glass & Metalwork Lights

Traditional style wall lighting
- LED replacable lamps

FLUX WALL MOUNT



E27
LED
VINTAGE-8E64
• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 10W | LED REPLACEABLE

LSW
Flux wall mount
- Available in black/gold, white/chrome or brushed brass
- Shade 140mmØ
- Wall mount 100mmØ
- Arm length 650mmL
- Braided cables, pull switch on base

EDWIN LIGHTS


WL2671-AB



R1682-AB

E27 | MAX. 60W | LED REPLACEABLE

WL2671-AB
Edwin wall light
- Available in antique brass
- 150mmW x 250mmH x 220mmD
- Mounting base 150mmH x 105mmW

E27 | MAX. 60W | LED REPLACEABLE

R1682-AB
Edwin pendant light
- Available in antique brass and satin chrome
- Shade 270mmØ
- Mounting base 103mmØ
- Adjustable up to 1260mmH (AB only)

ETTA WALL LIGHT


WL3259-AB


WL3259-CH

E14
LED
CANC-4SEWW
• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | MAX. 60W | IP 44 | LED REPLACEABLE

WL3259
Etta wall lights
- Ideal for wet areas such as next to bathroom vanities
- 160mmW x 270mmH x 240mmD
- Mounting base 55mmW x 120mmH

Translucent Glass Lights

Suits clear LED lamps or carbon filament type lamps

CLIFFORD PENDANT LIGHTS



QH3228-SC



QH3228-AB



QH3228-BL

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 10W | LED REPLACEABLE

QH3228
Clifford pendant light

- Clear translucent glass shade
- Available in black, antique brass or satin chrome
- Shade 290mmØ x 280mmH
- Adjustable up to overall length 1000mmH
- Ceiling rose 103mmØ

CLIFFORD WALL LIGHTS



WL1277-BL

WL1277-AB



WL1277-SC

E27 | MAX. 60W | LED REPLACEABLE

WL1277
Clifford wall lights

- Available in brass, satin chrome or black satin chrome
- 185mmW x 250mmH x 250mmD
- Mounting base100mmØ

Vanity & Bedside Lights

Add style with these decorative designs
- No control gear required



WL4337

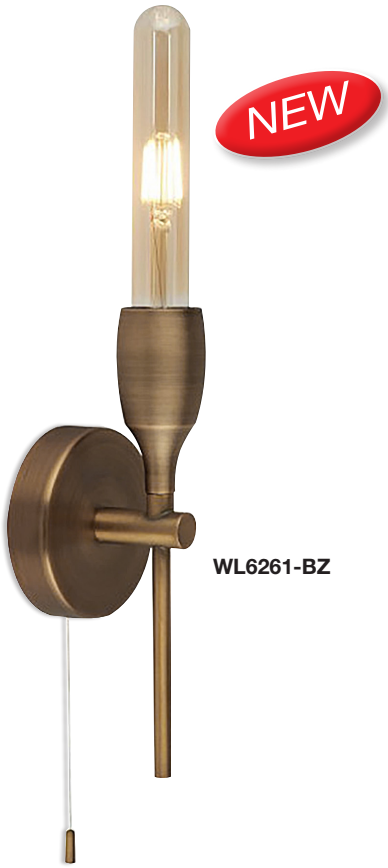

WL6261-BZ



WLC2163

G9

LED
G9-3WLED-WW



- 350 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam

G9 | MAX. 20W | IP 44 | LED REPLACEABLE

WL4337
- Chrome with opal glass
- 210mmH x 100mmW x 130mmD
- Mounting base 85mmØ
- 2.5 Watt LED lamp included

E27

LED
TTUBE-4EWW



- 380 total lm
- 4 Watts • 2,700K • CRI>80 • 360° Beam

E27 | MAX. 10W

WL6261-BZ
Abbey wall light
- Bronze finish
- 245mmH x 100mmW x 85mmD
- Mounting base 100mmØ

G9 | MAX. 40W | 220V-240V | LED REPLACEABLE

WLC2163
- Chrome base, opal glass
- 95mmH x 140mmD
- Mounting base 330mmL x 60mmH
- Acid glass

Traditional Decorative

Timeless styles to fit period or classic architecture

EMERSON



R1505-5P-AB



R1508-8P-AB



R1502-2B-AB

AGATHA



R8071-1P-SC



R8708-1B-SC

E14

LED
CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | MAX. 10W | LED REPLACEABLE

R1505-5P-AB
- Emerson 5 light pendant
- Antique brass
- 420mmH x 520mmØ
- Adjustable up to overall length 940mmL
- Ceiling rose 103mmØ

E14 | MAX. 10W | LED REPLACEABLE

R1508-8P-AB
- Emerson 8 light pendant
- Antique brass
- 420mmH x 650mmØ
- Adjustable up to overall length 940mmL
- Ceiling rose 103mmØ

E14 | MAX. 10W | LED REPLACEABLE

R1502-2B-AB
- Emerson wall light
- Antique brass
- 160mmH x 300mmW x 190mmD
- Mounting base 103mmØ

E27

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 40W | IP 44 | LED REPLACEABLE

R8071-1P-SC
- Agatha pendant light
- Opal glass with satin chrome metal work
- 280mmH x 300mmØ
- Adjustable up to overall length 1200mmL
- Ceiling rose 103mmØ

E27 | MAX. 40W | IP 44 | LED REPLACEABLE

R8708-1B-SC
- Agatha wall light
- Opal glass with satin chrome metal work
- 245mmD x 230mmH
- 170mmØ shade
- Mounting base 100mmØ

Pendants & Wall Lights

Quality glass and metal work
• Supplied complete with shades • Chain lengths 500mm

HERITAGE



R9355-5P-AB



R9353-3P-AB



R9352-2B-AB



R9351-1B-AB

DELLA PENDANT



CP576-DB

E27

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

LED
SMR-5EWW



• 400 total lm
• 5 Watts • 3,000K • CRI>80 • 210° Beam

5x E27 MAX. 60W DCM LED REPLACEABLE

R9355-5P-AB
Heritage 5 light pendant
• Antique brass & alabaster glass
• 380mmH x 620mmØ

3x E27 MAX. 60W DCM LED REPLACEABLE

R9353-3P-AB
Heritage 3 light pendant
• Antique brass & alabaster glass
• 400mmH x 620mmØ
• **Q938** glass shade

2x E27 MAX. 60W LED REPLACEABLE

R9352-2B-AB
Heritage 2 light wall light
• Antique brass & alabaster glass
• 210mmH x 400mmW
• Mounting base 160mmH x 110mmW

E27 MAX. 60W LED REPLACEABLE

R9351-1B-AB
Heritage wall light
• Antique brass & alabaster glass
• 210mmH x 190mmW
• Mounting base 160mmH x 110mmW

E27 MAX. 60W LED REPLACEABLE

CP576-DB
Della pendant light
• 450mmW x 540mmH
• Adjustable up to 930mm overall length
• Dark brown paint finish
• Opal and clear glass shades

Sylvia Decorative Lights

Classic styling with alabaster glass available with antique brass or satin chrome metal work

ANTIQUE BRASS



E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | 7 Watt | LED REPLACEABLE

R2683
Sylvia 3 light bar pendant
- 990mmL x 280mmW x 280mmH
- Adjustable up to 820mmH
- Mounting base 300mmL x 43mmW



SATIN CHROME

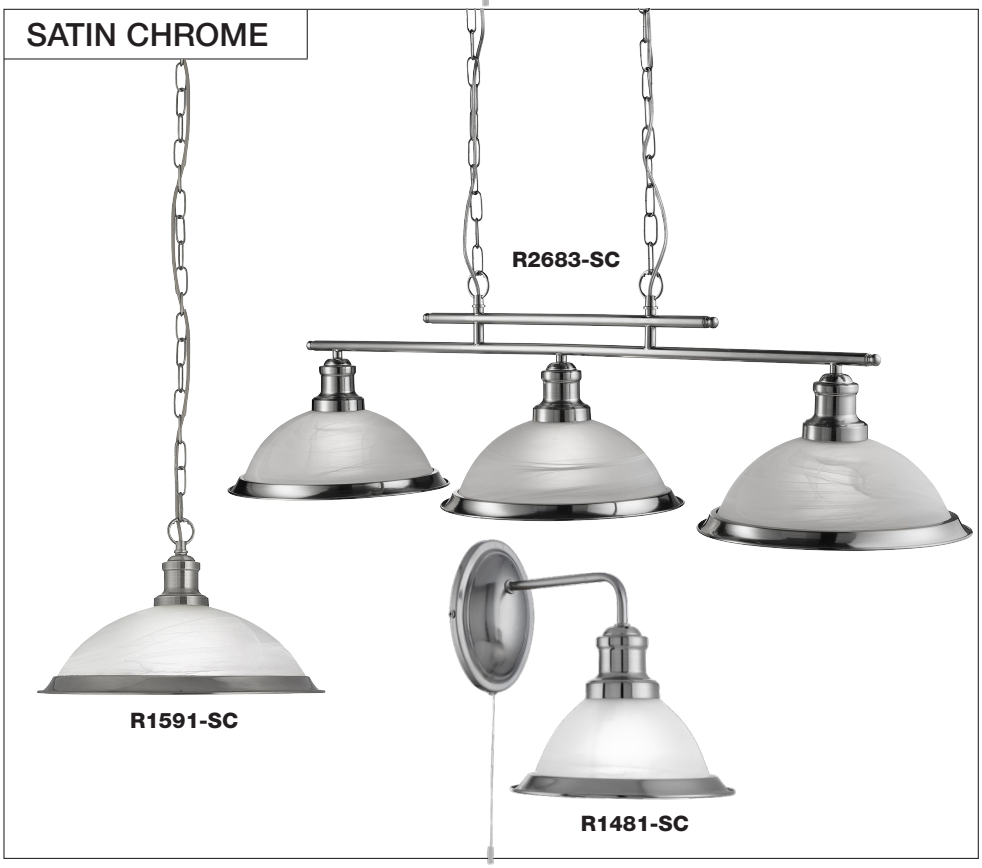

E27 | 7 Watt | LED REPLACEABLE

R1481
Sylvia wall light
- 200mmW x 250mmH x 280mmD
- Mounting base 102mmW x 155mmD
- Comes with pull switch cord. Can be easily removed if required

E27 | 7 Watt | LED REPLACEABLE

R1591
Sylvia single pendant
- Shade 340mmØ x 220mmH
- Adjustable up to 740mmH
- Ceiling mount 100mmØ

Limited Edition Decorative Lights

Product information available at superlux.co.nz, superlux.com.au simply type in the product code in the search box

SINGLE PENDANTS



R1682-SC



R1682-AB



QH1632-SM



QH1632-CL

MULTI LAMP PENDANTS



R4614-BL



R4613-BL

WALL LIGHTS



P3008-AB



R1571-CH

Pendants and Wall Lights

Can use dimmable LED lamp option

LOGAN



R1041-1B-SC

R1044-1P-SC

R1043-3P-SC

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 100W | LED REPLACEABLE

R1044-1P-SC

- Satin chrome
- Shade 200mmH x 330mmØ
- Ceiling rose 102mmØ
- Overall height 790mm

3x E27 | MAX. 60W | DCM | LED REPLACEABLE

R1043-3P-SC

- American diner
- Satin chrome
- 620mmØ x 390mmH
- Ceiling rose 104mmØ
- Overall height 970mm

E27 | MAX. 60W | LED REPLACEABLE

R1041-1B-SC

- 210mmH x 265mmD x 200mmW
- 200mmØ shade
- Oval base mounting 160mmH x 110mmW

DEVON



Overall length 1000mm

R4581-1P-AB

R4581-1P-BL

E27 | MAX. 100W | DCM | LED REPLACEABLE

R4581-1P
Devon pendant light

- 450mmH x 360mmØ
- Alabaster glass shade with metal work pendant

Decorative Pendant Lights

Classic candelabra style ceiling lights in satin black or satin chrome finishes

MAYPOLE



R6348-8P-BL



R6345-5P-BL



R6343-3P-BL



R6342-2B-BL



R6343-3P-SC



R6342-2B-SC

E14

LED
CANC-4SEWW



- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

LED
CANP-4SEWW



- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

8x E14 MAX. 60W LED REPLACEABLE

R6348-8P-BL
- 500mmH x 600mmØ
- Ceiling rose 105mmØ
- 8 light pendant
- Adjustable up to 1200mm overall height

5x E14 MAX. 10W LED REPLACEABLE

R6345-5P-BL
- 500mmH x 460mmØ
- Ceiling rose 105mmØ
- 5 light pendant
- Adjustable up to 1200mm overall height

3x E14 MAX. 10W LED REPLACEABLE

R6343-3P
- 500mmH x 460mmØ
- Ceiling rose 105mmØ
- 3 light pendant
- Adjustable up to 1050mm overall height

2x E14 MAX. 60W LED REPLACEABLE

R6342-2B
- 310mmH x 310mmW x 140mmD
- Mounting base 245mmH x 56mmW
- 2 light wall mounted

Decorative Pendant Lights

Classic candelabra style ceiling lights in antique brass

MAYPOLE



R6348-8P-AB



R6345-5P-AB



R6343-3P-AB



R6342-2B-AB

E14

LED
CANC-4SEWW



- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

LED
CANP-4SEWW



- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

8x E14 MAX. 60W LED REPLACEABLE

R6348-8P-AB
- 500mmH x 600mmØ
- Ceiling rose 105mmØ
- 8 light pendant
- Adjustable up to 1200mm overall height

5x E14 MAX. 60W LED REPLACEABLE

R6345-5P-AB
- 500mmH x 460mmØ
- Ceiling rose 105mmØ
- 5 light pendant
- Adjustable up to 1200mm overall height

3x E14 MAX. 60W LED REPLACEABLE

R6343-3P-AB
- 500mmH x 460mmØ
- Ceiling rose 105mmØ
- 3 light pendant
- Adjustable up to 1200mm overall height

2x E14 MAX. 60W LED REPLACEABLE

R6342-2B-AB
- 310mmH x 310mmW x 140mmD
- Mounting base 245mmH x 56mmW
- 2 light wall mounted

Decorative Ceiling and Wall

Cottage and Rustic style looks

JASMINE



R2495-5P-CR



R24912-12P-CR



R2492-2B-CR

E14

LED
CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 MAX. 40W LED REPLACEABLE

R2495-5P-CR
Jasmine 5 light
- Cream with a touch of gold
- Crystal leaf decorations
- 480mmH x 450mmØ
- Height adjustable up to 960mmL
- Ceiling Rose 103mmØ

E14 MAX. 40W LED REPLACEABLE

R2492-2B-CR
Jasmine wall light
- Cream with a touch of gold
- Crystal leaf decorations
- 350mmH x 180mmØ x 180mmD
- Mounting base 100mmØ

E14 MAX. 7W LED REPLACEABLE

R24912-12P-CR
Jasmine 12 light
- Cream with a touch of gold
- Crystal leaf decorations
- 860mmH x 870mmØ
- Height adjustable up to 1460mmL
- Ceiling Rose 103mmØ

QUINCY



R9235-GY

E14 MAX. 7W LED REPLACEABLE

R9235-GY
Quincy 5 light
- Metal and wood with grey paint effect
- 550mmH x 640mmØ
- Height adjustable up to 1130mmL
- Ceiling Rose 100mmØ

Decorative Ceiling and Wall

Cottage and Rustic style looks

JASMINE



R2495-5P-BB



R2492-2B-BB

E14

LED
CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | MAX. 40W | LED REPLACEABLE

R2495-5P-BB
Jasmine 5 light
- Brushed brass
- Crystal leaf decorations
- 480mmH x 450mmØ
- Height adjustable up to 960mmL
- Ceiling Rose 103mmØ

E14 | MAX. 40W | LED REPLACEABLE

R2492-2B-BB
Jasmine wall light
- Brushed brass
- Crystal leaf decorations
- 350mmH x 180mmØ x 180mmD
- Mounting base 100mmØ

LOUISA



R1842-2B-BR



R1845-5P-BR

E14 | MAX. 60W | LED REPLACEABLE

R1842-2B-BR
Louisa wall light
- 220mmH x 380mmW x 200mmD
- Mounting base 150mmØ

E14 | MAX. 60W | LED REPLACEABLE

R1845-5P-BR
Louisa light candelabra
- 600mmØ x 640mmH
- Overall length 1500mmL
- Ceiling Rose 100mmØ

Decorative Ceiling & Wall

Changeable lamps allow choice of different lighting effects

TULIP



R1765-5C-CH

R2769-9P-CH

E14

LED
CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

5x E14 MAX. 40W LED REPLACEABLE

R1765-5C-CH
- 5 light
- 200mmH x 600mmØ
- Mounting base 125mmØ

9x E14 MAX. 40W LED REPLACEABLE

R2769-9P-CH
- 9 light
- 400mmH x 760mmØ
- Mounting base 115mmØ
- Chain length 500mmL



R1895-5P-BL



R6792-2B-PG



R7633-3P-CH

B22

LED
SMR-5BWW



• 425 total lm
• 5 Watts • 3,000K • CRI>80 • 210° Beam

3x E14 MAX. 40W LED REPLACEABLE

R7633-3P-CH
- 3 light
- 530mmH x 250mmØ
- Mounting base 130mmØ
- Chain length 500mmL

5x E14 MAX. 60W LED REPLACEABLE

R1895-5P-BL
Ambrosia 5 light pendant
- Wrought iron pendant
- 460mmH x 460mmØ
- Ceiling rose 105mmØ
- Chain length 500mmL

2x B22 MAX. 60W LED REPLACEABLE

R6792-2B-PG
- Picasso green
- 200mmH x 430mmW
- **Q697** glass shade

Pendants & Wall Lights

Classic decorative styles

SOFIA



R1051-1B-WH



R1055-5P-WH

E14

LED
CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | MAX. 60W | LED REPLACEABLE

R1051-1B-WH
- 1 light wall light
- White oval fabric shade with chrome metal work
- Crystal decorations
- Switch on bottom of base
- 180mmW x 300mmH x 140mmD
- Mounting base 135mmH x 80mmW
- Shade 180mmW x 110mmD x 150mmH

E14 | MAX. 60W | LED REPLACEABLE

R1055-5P-WH
- 5 light pendant
- White oval fabric shade with chrome metal work
- Crystal decorations
- 580mmØ x 560mmH
- 500mmL adjustable chain
- 100mmØ ceiling rose

IGNACIA



R8735-5P-DB

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | LED REPLACEABLE

R8735-5P-DB
- 5 light pendant
- Dark brown metal work with alabaster glass shades
- 680mmØ x 500mmH
- 600mmL adjustable chain
- 115mmØ ceiling rose
- Spare glass Q873

Sybil Pendants and Wall Lights

Quality metal fabrication with opaque mesh
- Available in satin black or satin gold painted finish

SYBIL



CP12483-GO



CP12483-BL



CP2484-GO



CP2484-BL

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 60W | LED REPLACEABLE

CP12483
Sybil round 3 light pendant
- Shade 450mmØ x 180mmH
- Adjustable up to 1500mmH
- Ceiling rose 120mmØ

E27 | MAX. 60W | LED REPLACEABLE

CP2484
Sybil oval 4 light pendant
- Shade 910mmL x 230mmH x 300mmW
- Adjustable up to 1500mmH
- Mounting base 260mm x 90mm

ADELINE

NEW

LED Lamp INCLUDED



CL8607-SC



CL8607-AB

R7s 78mm

LED
LEDLIN118-12 ***Included***



- 1000 total lm
- 12 Watts • 3,000K • CRI>80 • 360° Beam

R7s 118 | MAX. 150W

CL8607
Adeline ceiling light
- Satin chrome or antique brass
- 290mmØ x 230mmH
- Ceiling light with up lighting and downlighting effect

Pendants

Grey metal shade with wood accent and black braided cord

MARTINA



E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | LED REPLACEABLE

MS420-GY
Martina Max pendant light
- Grey metal shade with wood detail
- Black braided cord
- Shade 325mmH x 420mmØ
- Adjustable up to overall length 1600mmH
- Ceiling rose 100mmØ

E27 | MAX. 60W | LED REPLACEABLE

MS270-GY
Martina Mid pendant light
- Grey metal shade with wood detail
- Black braided cord
- Shade 255mmH x 270mmØ
- Adjustable up to overall length 1600mmH
- Ceiling rose 100mmØ

E27 | MAX. 60W | LED REPLACEABLE

MS150-GY
Martina Mini pendant light
- Grey metal shade with wood detail
- Black braided cord
- Shade 235mmH x 150mmØ
- Adjustable up to overall length 1600mmH
- Ceiling rose 100mmØ

SASSA



E27 | MAX. 60W | LED REPLACEABLE

R5423-3P
Sassa 3 light pendant
- Available in black or antique brass
- Translucent black or amber glass shades
- Overall length 1500mmH
- Mounting base 250mmØ

Metalwork Decorative Lighting

Make a statement with these design peices



R6847-CH



R6847-CO



R4301-1P-BL



MS20223-GD



R2474-BL
R2476-BL
460mmØ or 600mmØ

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 10W | LED REPLACEABLE

R6847
Guard pendant light
- Available in chrome or copper
- Shade 280mmH x 140mmØ
- Height adjustable up to 1metre
- Ceiling Rose 110mmØ

E27 | MAX. 10W | LED REPLACEABLE

R4301-1P-BL
Fisherman pendant light
- Black
- Shade 310mmH x 320mmØ
- Height adjustable up to 1metre
- Ceiling Rose 103mmØ

E27 | MAX. 60W | LED REPLACEABLE

MS20223-GD
Clemmie pendant light
- Black cord with gold shade and base
- Shade 300mmØ
- Height adjustable up to 1400mm
- Ceiling rose 120mmØ

E14

LED
CANC-4SEWW



- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | MAX. 7W | LED REPLACEABLE

R2474-BL
Amor pendant 4 light
- Black
- Shade 460mmØ
- Minimum height 620mmH
- Height adjustable up to 1200mmL
- Ceiling Rose 115mmØ

E14 | MAX. 7W | LED REPLACEABLE

R2476-BL
Amor pendant 6 light
- Black
- Shade 600mmØ

Decorative Vintage

Get that vintage style with the exposed bulb look



R9926-BL



R8048-BLBS

MAVEN



MS9412-BLBS



MS9411-BLBS



MS9413-BLBS

E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 10W | LED REPLACEABLE

R9926-BL
Beaufort 6 light
- Ceiling or wall mount
- Black
- 820mmL x 320mmW x 120mmD
- Ceiling Rose 120mmØ

E27 | MAX. 10W | LED REPLACEABLE

R8048-BLBS
Alvie 8 light
- Black and brass
- 640mmØ x 250mmD
- Ceiling Rose 130mmØ
- Adjustable arms

E27 | MAX. 10W | LED REPLACEABLE

MS9412-BLBS
Maven mini pendant light
- Black and brass
- Shade160mmØ x 300mmH
- Adjustable up to 1588mmL
- Ceiling Rose 120mmØ

E27 | MAX. 10W | LED REPLACEABLE

MS9413-BLBS
Maven mid pendant light
- Black and brass
- Shade 220mmØ x 360mmH
- Adjustable up to 1588mmL
- Ceiling Rose 120mmØ

E27 | MAX. 10W | LED REPLACEABLE

MS9411-BLBS
Maven max pendant light
- Black and gold
- Shade 300mmØ x 270mmH
- Adjustable up to 1580mmL
- Ceiling Rose 120mmØ

Metal Shade Pendants

Suitable for a wide range of applications providing superb downlight illumination

DEPOT PENDANTS



MS336-BA

MS349-BA



MS9250-WH

MS341-BA

MS335-BA

MS9450-BL

E27

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

LED
GLOB-8E125



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 60W | LED REPLACEABLE

MS336-BA
- Ceiling rose 110mmØ
- Shade 350mmØ x 250mmH
- Cord length 1400mmL

E27 | MAX. 60W | LED REPLACEABLE

MS349-BA
- Ceiling rose 110mmØ
- Shade 500mmØ x 300mmH
- Cord length 1400mmL

E27 | MAX. 60W | LED REPLACEABLE

MS2950-WH
- Ceiling rose 90mmØ
- Shade 250mmØ x 200mmH
- Cord length 1400mmL

E27 | MAX. 60W | LED REPLACEABLE

MS9450-BL
- Ceiling rose 90mmØ
- Shade 450mmØ x 300mmH
- Cord length 1400mmL
- Black shade painted black inside too

E27 | MAX. 60W | LED REPLACEABLE

MS341-BA
- Universal pendant
- Ceiling rose 110mmØ
- Shade 410mmØ x 200mmH
- Cord length 1400mmL

E27 | MAX. 60W | LED REPLACEABLE

MS335-BA
- Tapered pendant
- Ceiling rose 110mmØ
- Shade 350mmØ x 180mmH
- Cord length 1400mmL

Retro Modern Metal Pendants

High gloss black paint with matt white inside or high gloss white paint with matt silver inside paint finish available



E27

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

LED
GLOBD-12EWW



- 1200 total lm
- Dimmable
- 12 Watts • 3,000K • CRI>80 • 300° Beam

E27 | MAX. 75W | LED REPLACEABLE

MS400
- 400mmØ shade
- Ceiling rose 100mmØ
- 2 metre cord adjustable length

E27 | MAX. 75W | LED REPLACEABLE

MS500
- 500mmØ shade
- Ceiling rose 100mmØ
- 2 metre cord adjustable length

E27 | MAX. 75W | LED REPLACEABLE

MS600
- 600mmØ shade
- Ceiling rose 100mmØ
- 2 metre cord adjustable length

E27 | MAX. 75W | LED REPLACEABLE

MS2400
- 2x 400mmØ shades
- 1000mmL x 400mmW
- Adjustable to 1.4 metres
- Ceiling rose 150mmØ
- Chrome bar and ceiling rose
- Ideal for over kitchen islands, dining tables and pool tables



Adra Metal Pendants

Adra crafted pendants have a dimpled multifaceted pattern and a decorative chain suspension

Made in India





B22

LED
GLSD-6BWW



• 450 total lm • Dimmable
• 6 Watts • 3,000K • CRI>81 • 270° Beam

B22 | MAX. 60W | LED REPLACEABLE

MS350
- Ceiling rose 105mmØ
- Shade 350mmØ x 360mmH
- Overall length 1650mmL

B22 | MAX. 60W | LED REPLACEABLE

MS250
- Ceiling rose 105mmØ
- Shade 250mmØ x 300mmH
- Overall length 1600mmL



B22 | MAX. 60W | LED REPLACEABLE

MS320
- Ceiling rose 105mmØ
- Shade 320mmØ x 190mmH
- Overall length 1480mmL

Fisherman Series Lights

Traditional style available in antique brass or satin chrome

ANTIQUE BRASS



R5331-1B-AB



R4301-1P-AB



R5787-1P-AB

SATIN CHROME



R4301-1P-SC



R5787-1P-SC

E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 10W | LED REPLACEABLE

R5331-1B-AB
- Antique brass
- 180mmØ
- Mounting base 105mmØ

E27 | MAX. 100W | LED REPLACEABLE

R4301-1P-AB
- Antique brass
- 320mmØ x 300mmH
- Overall 1000mm length
- Ceiling rose 105mmØ

E27 | MAX. 10W | LED REPLACEABLE

R5787-1P-AB
- Antique brass
- 180mmØ x 250mmH
- Overall 950mm length
- Ceiling rose 105mmØ

E27 | MAX. 10W | LED REPLACEABLE

R4301-1P-SC
- Satin chrome
- 320mmØ x 300mmH
- Overall 1000mm length
- Ceiling rose 105mmØ

E27 | MAX. 60W | LED REPLACEABLE

R5787-1P-SC
- Satin chrome
- 180mmØ x 250mmH
- Overall 950mm length
- Ceiling rose 105mmØ

LED Pendants

Place over kitchen island or use as bedside pendants

PENDANTS



INTEGRAL LED
• 264 total lm • 30° Beam
• 3 Watts • 3,000K • CRI>80

MS40
- Shade 40mmØ x 200mmH
- Adjustable up to 1300mmH
- Mounting base 100mmØ

INTEGRAL LED
• 240 total lm • 20° Beam
• 3 Watts • 3,000K • CRI>80

MS2254-CH
- Chrome, shade 100mmØ x 112mmH
- Adjustable up to 1500mmH
- Mounting base 100mmØ

INTEGRAL LED
• 1,400 total lm • 40° Beam
• 16 Watts • 3,000K • CRI>80

MS300-LED-SC
- Shade satin chrome 63mmØ x 300mmH
- Overall length adjustable up to1600mmH

GX53
LED
GX53-LED-WW
Included
• 98 total lm
• 2.3 Watts • 3,000K • CRI>75

GX53 | MAX. 9W | LED REPLACEABLE

MS1053-BA
- Brushed aluminium
- Shade 320mmL x 100mmØ
- Adjustable up to 1600mmL
- Mounting 100mmØ
- 2.3Watt LED lamp included

4x GX53 | MAX. 9W | LED REPLACEABLE

SGX53-4P-CH
- Chrome, 860mmL x 90mmW
- Adjustable up to 1300mmH
- Mounting 240mmL x 45mmW
- 4 x 2.3 Watt LED lamps included

Classic Metal pendants

Suitable for a wide range of applications providing superb downlight illumination



MS 29020-BA | MS 29202-BA | MS47402-BA



MS1021-BA | MS 34202-BA | MS70358-CO | MS70357-CO

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | LED REPLACEABLE

MS 29020-BA
- 200mmØ x 1600mmL

E27 | MAX. 60W | LED REPLACEABLE

MS 29202-BA
- 230mmØ x 1100mmL

E27 | MAX. 100W | LED REPLACEABLE

MS47402-BA
- 465mmØ

E27 | MAX. 60W | LED REPLACEABLE

MS1021-BA
- 1600mm overall length
- Shade 100mmØ x 320mmL

E27 | MAX. 75W | LED REPLACEABLE

MS34202-BA
- 360mmØ x 1650mmL

E27 | MAX. 60W | LED REPLACEABLE

MS 70358
- 250mmØ x 1300mmH

E14

LED
CANP-4SEWW



- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

E14 | MAX. 40W | LED REPLACEABLE

MS 70357
- 150mmØ x 1300mmH

Decorative Multi Lights

Ideal for over kitchen islands and dinning tables

VELA



G9

LED

G9-3WLED-WW



- 350 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam

HALOGEN

G9-40F



- 400 total lm • Dimmable
- 40 Watts • 3,000K • CRI>100

G9 | MAX. 40W | LED REPLACEABLE

CP110-CH

- 6 light pendant
- Chrome body with acid glass shade
- 1105mmL
- Glass shade 65mmL x 40mmW x 90mmD
- Mounting base 72mm square
- Each head has an adjustable knuckle

Pendant Lighting

Replaceable lamp allows choice of different lighting effects

EDISON CORD SET





E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLOB-8E125



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
TTUBE-4EWW



- 380 total lm
- 4 Watts • 2,700K • CRI>80 • 360° Beam

E27 | MAX. 60W | LED REPLACEABLE

CGE
Edison pendant/cord set

- Ceiling rose 100mmØ
- Overall length adjustable up to 1470mmL
- Can be used to mount lamp shades with mounting hole 42mmØ
- Available in satin chrome, copper, antique brass or black

G9

LED
G9-3WLED-WW



- 350 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam

G9 | MAX. 25W | LED REPLACEABLE | Made in Poland

MS125
Segmento pendants

- Metal pendant light available in white, black, red or orange
- Shade 180mmØ x 200mmH
- Adjustable cord to 1600mm overall height
- Ceiling rose 115mmØ

LED Contemporary Pendants

Sleek statement lights for over kitchen islands, entrance halls and stair wells



CP1041-5P-CH



CP1041-1P-CH

INTEGRAL LED
• 1200 total lm • 20° Beam
• 5 x 3 Watts • 3,000K • CRI>80

CP1041-5P-CH
- Chrome 5 light pendant
- 250mmØ mounting base
- Adjustable height to 2 metres
- Shade 40mmØ x 670mmH
- Integral driver

INTEGRAL LED
• 240 total lm • 20° Beam
• 3 Watts • 3,000K • CRI>80

CP1041-1P-CH
- Chrome 1 light pendant
- 100mmØ mounting base
- Adjustable height to 2 metres
- Shade 40mmØ x 670mmH
- Integral driver

FOR SINGLE PENDANTS	
DISTANCE	**LUX**
1.m	1212
1.5m	510
2m	196

Modern Pendant Lights

Adjustable height pendant lighting

ACENT SWIVELS AT CENTRE

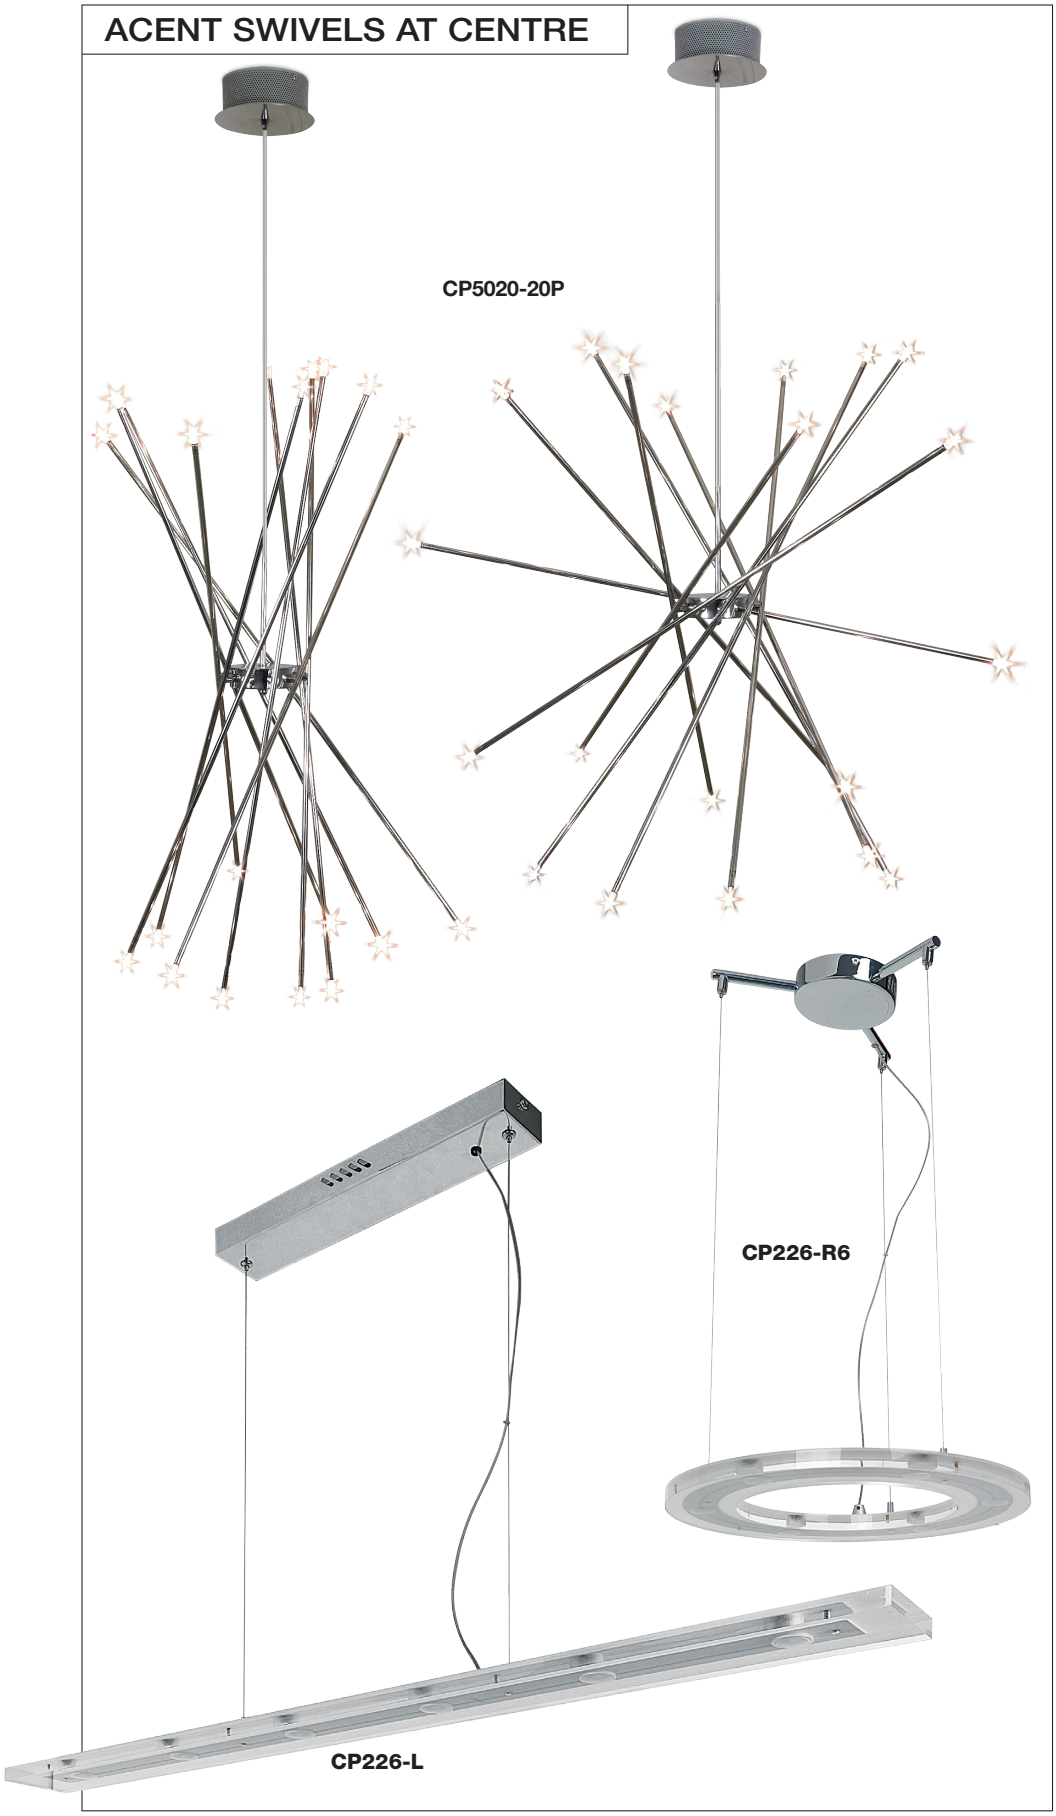

G4.0

HALOGEN
HCAP-10
Included

• 100 total lm • Dimmable
• 10 Watts • 3,000K • CRI>100

LED
CAP-3WLED-WW

• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

Note:
When using LED capsules one lamp must remain halogen to prevent flicker.

20x G 4.0 MAX. 10W LED REPLACEABLE

CP5020-20P
Acent
- Adjustable into many different configurations, light stems swivel at centre
- Height adjustable up to 1000mmL
- 130mmØ ceiling rose
- When light stems are assembled horizontal dimension are 270mmH x 630mmØ

INTEGRAL LED
• 1584 total lm
• 18 Watts • 3,000K • CRI>80

CP226-R6
- Made from acrylic & chrome
- 6 x 3 Watt LED
- Adjustable to 1500mmH
- 410mmØ
- Mounting base 130mmØ
- Driver included

INTEGRAL LED
• 1584 total lm
• 18 Watts • 3,000K • CRI>80

CP226-L
- Made from acrylic & chrome
- 6 x 3 Watt LED
- Adjustable to 1500mmH
- 95mmW x 1000mmL
- Mounting base 350mmL x 60mmW
- Driver included

Contemporary Decorative Pendants

Ideal feature lighting
- Adjustable height

TRANSLUSIVE



CR4803-CH

E14

LED
CANC-4SEWW
- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

LED
CANP-4SEWW
- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

3x E14 MAX. 60W

CR4803-CH
- 450mm height x 450mm diameter
- Overall height adjustable up to 1000mm
- Chrome and crystal
- X-ray style acrylic shade when light is switch on
- 108mmØ ceiling rose

GALAXY



CP8317-CH

G4.0

LED
CAP-3WLED-WW
- 150 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam

HALOGEN
HCAP-10
- 100 total lm • Dimmable
- 10 Watts • 3,000K • CRI>100

Note:
When using LED capsules one lamp must remain halogen to prevent flicker.

6x G 4.0 MAX. 10W

CP8317-CH
- 6 x 10 Watt halogen capsules
- Chrome
- 410mm height x 450mmØ
- Overall height adjustable up to 1290mmL
- 100mmØ ceiling rose

Decorative Ceiling & Wall Lights

Ideal for low ceilings

WILLOW



R81510-10C-CH



R6153-3B-CH

XANDRA

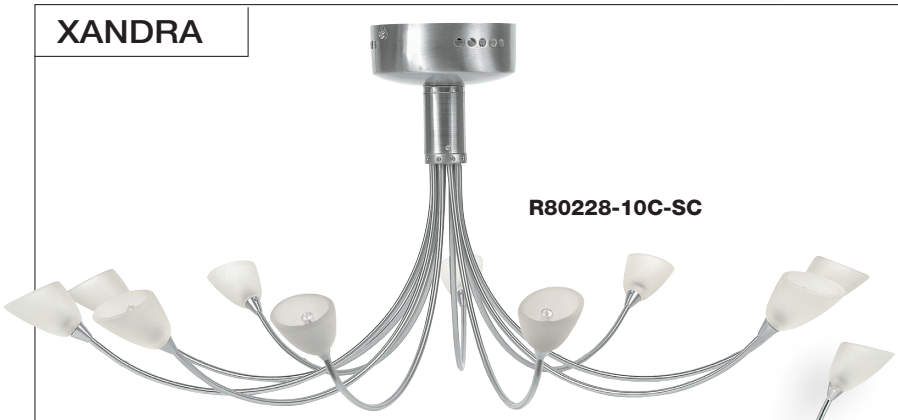

R80228-10C-SC



R80228-3B-SC

G4.0

HALOGEN
HCAP-10
Included
• 100 total lm • Dimmable
• 10 Watts • 3,000K • CRI>100

LED
CAP-3WLED-WW
• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

Note:
When using LED capsules one lamp must remain halogen to prevent flicker

10x G 4.0 MAX. 10W LED REPLACEABLE

R81510-10C-CH
- Chrome and white acid glass detail
- 280mmH x 660mm diameter
- 110mmØ ceiling base

3x G 4.0 MAX. 20W LED REPLACEABLE

R6153-3B-CH
- Chrome and white acid glass detail
- 430mmH x 370mmW
- 110mmØ mounting base

10 X G 4.0 MAX. 10W 12V LED REPLACEABLE

R80228-10C-SC
- Satin chrome
- 650mmØ x 280mmH
- Transformer included
- Canopy 115mmØ

3 X G 4.0 MAX. 10W 12V LED REPLACEABLE

R80228-3B-SC
- Satin chrome wall light
- 485mmH x 220mmW
- Mounting base 100mmØ
- Transformer included

Decorative Pendants

Changeable lamps allow choice of different lighting effects

GLOW



CR4257-7P

CR2127-1P

E14

LED
CANC-4SEWW



- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

7x E14 MAX. 60W LED REPLACEABLE

CR4257-7P
- Chrome with crystal droplets
- 90mmH x 1100mmL
- Adjustable height
- 90mmØ ceiling rose and 2x 49mmØ mounts

E14 MAX. 40W LED REPLACEABLE

CR2127-1P
- Chrome
- Glass shade with glass prisms
- Pendant
- 210mmØ x 1200mm overall height

CP2176 SERIES



CP2176-SC



CP7156-WH

R7s 78mm

LED
LIN78-6WLED-CW



- 600 total lm
- 6 Watts • 4,000K • CRI>75

R7s 78 MAX. 150W LED REPLACEABLE

CP2176
- Satin chrome
- 480mmØ x 650mmH

E27

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

3x E27 MAX. 40W LED REPLACEABLE

CP7156
- Available in white
- 1220mmH x 400mmØ
- 150mmØ ceiling rose
- Adjustable height
- Glass bottom, open at top
- Up and down lighter

Glass & Crystal Pendant Lights

Large feature lights

• Make a statement in entrance halls and stairwells



CR5742



R888-8P

STRING 5 LIGHT



R2015-5C-CH

GU10

LED
GU10-HPLED-WH



• 520 total lm
• 6 Watts • 3,000K • CRI>80 • 38° Beam

5x GU 10 MAX. 50W LED REPLACEABLE

CR5742
• Chrome with crystal droplets
• Adjustable height
• 1800mmH x 300mmØ

G4.0

HALOGEN
HCAP-10



• 100 total lm • Dimmable
• 10 Watts • 3,000K • CRI>100

LED
CAP-3WLED-WW



• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

8x G 4.0 MAX. 10W LED REPLACEABLE

R888-8P
• Chrome with Ice glass droplets
• Adjustable height
•1250mmH x 215mmØ

Note:
When using LED capsules, one lamp must remain halogen to prevent flicker

G9

LED
G9-3WLED-WW



• 350 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

HALOGEN
G9-40F



• 400 total lm • Dimmable
• 40 Watts • 3,000K • CRI>100

5x G9 MAX. 40W LED REPLACEABLE

R2015-5C-CH
• Chrome, black string shades
• 450mmH x 640mmØ
• 120mmØ ceiling base

Hale Crystal Chandeliers

Barley twist glass arms with strass crystal decorations

CHROME



CRC-HALE-18P



CRC-HALE-2B

GOLD



CRY-HALE-5P



CR5172-2B

E14

LED
CANC-4SEWW



- 440 total lm
- 4 Watts • 3,000K • CRI>80 • 270° Beam

LED
CANP-4SEWW



- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

18x E14 MAX. 60W LED REPLACEABLE

CRC-HALE-18P
- 18 light
- 900mmH x 1000mmØ
- Chrome plated candle effect
- 105mmØ ceiling rose
- 15 kg

2x E14 MAX. 60W LED REPLACEABLE

CRC-HALE-2B
- 2 light Wall light
- 209mmH x 310mmW x 170mmD
- Chrome plated candle effect
- 105mmØ wall mount

5x E14 MAX. 60W LED REPLACEABLE

CRY-HALE-5P
- 5 light
- 420mmH x 520mmØ
- **Gold** candle effect
- 105mmØ ceiling rose
- 5 kg

B22

LED
CANP-4BWW



- 280 total lm
- 4 Watts • 3,000K • CRI>80 • 210° Beam

2x B22 MAX. 60W LED REPLACEABLE

CR5172-2B
- Wall light
- 230mmØ x 220mmH
- Antique brass
- High lustre leadless crystal

European Crystal Chandeliers

Guaranteed 24% lead crystal strass • Genuine cut and polished crystal

TWISTER



CRI-SPIR-2M

CASCADE



CRI-CASA-5P



CRI-CASA-9P

E14

LED

CANC-4SEWW



• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

12x E14 MAX. 40W LED REPLACEABLE

CRI-SPIR-2M

- 420mmØ x 2000mmH
- 12 light
- 24ct gold
- 21 kg

5x E14 MAX. 40W LED REPLACEABLE

CRI-CASA-5P

- 400mmØ x 700mmH
- 5 light
- Nickel metal frame
- 9 kg

9x E14 MAX. 40W LED REPLACEABLE

CRI-CASA-9P

- 600mmØ x 750mmH
- 9 light
- Nickel metal frame
- 20 kg

Satin Chrome Pendants

No control gear required



HPGU-1P-SC



QH690-BE
Blue



CP1029

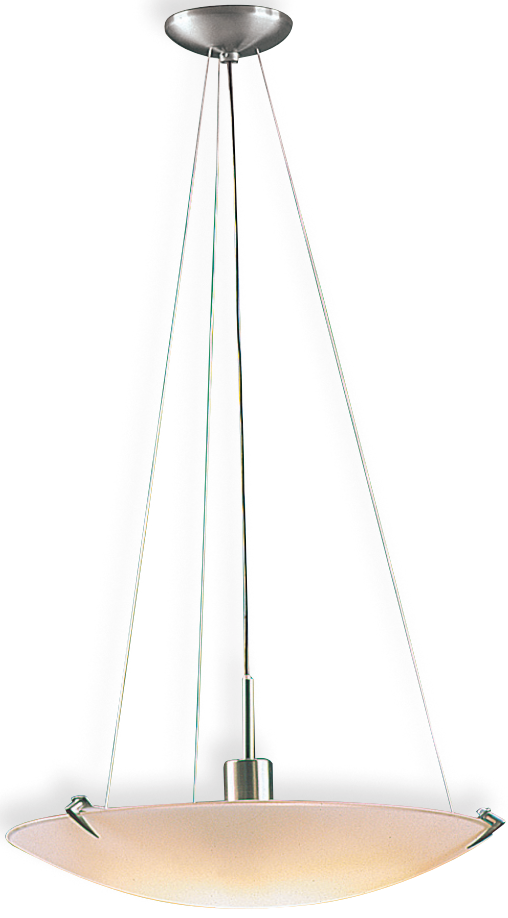

CP200-SC

GU10

LED
GU10D-NBLED-WW



• 580 total lm • Dimmable
• 6.5 Watts • 2,700K • CRI>90 • 24° Beam

GU 10 | MAX. 35W | LED REPLACEABLE

HPGU-1P-SC
- Brushed aluminium
- Shade 55mmØ, ceiling rose 110mmØ
- Overall length 1200mm

G9

LED
G9-3WLED-WW



• 350 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

5x G9 | MAX. 40W | LED REPLACEABLE

CP1029
- Satin chrome
- Shade 400mmØ x 1200mmL
- Height fully adjustable
- Ceiling rose 120mmØ

E27

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 100W | LED REPLACEABLE

QH690-BE
- Duplex, acid etched
- 135mmØ x 480mmH
- Chrome ceiling rose 120mmØ
- Maximum length 1600mm

R7's 118mm

LED
LEDLIN118-12



• 1000 total lm
• 12 Watts • 3,000K • CRI>80 • 360° Beam

R7s 118 | MAX. 200W | LED REPLACEABLE

CP200-SC
- Satin chrome
- Shade 460mmØ, ceiling rose 130mmØ
- Height adjustable to 1200mm
- Dimmable

Glass Pendants

High quality glass - adjustable length

ELLIE PENDANTS



QH6311-AC



QH6313-AC

E14

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | LED REPLACEABLE

QH6311-AC
Ellie single pendant
- Acid glass with brass metal work
- Black braided cord
- Shade 290mmØ x 420mmH
- Ceiling mount 90mmØ
- Adjustable up to 1200mmL

E27 | MAX. 60W | LED REPLACEABLE

QH6311-AC
Ellie 3 light pendant
- Acid glass with brass metal work
- Black braided cord
- Shade 200mmØ x 320mmH
- Ceiling mount 330mmØ
- Adjustable up to 1530mmL



QH2149-3S

E27

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E14 | MAX. 40W | LED REPLACEABLE

QH2149-3S
- 3 x glass shades
- Ribbed acid glass
- 890mmL x 193mmØ x 1200mmH
- Chrome

Euro Glass Pendants

Light large areas, place over dining tables, in stair wells, over kitchen islands etc



QH4803



QH2193-WH



QH4097-WH



QH4097-BL



QH2198-WH

E27

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

3X E27 MAX. 40W LED REPLACEABLE

QH4803

- Chrome and acid glass
- 480mmØ shade x 140mm
- 1600mm overall length, can be shortened
- Closed shade construction

E27 MAX. 60W LED REPLACEABLE

QH2193-WH

- Chrome and acid glass
- Shade 280mmØ x 530mmH
- Adjustable to1500mm overall length
- 100mmØ ceiling rose

E27 MAX. 60W LED REPLACEABLE

QH2198-WH

- Chrome and acid glass
- Shade 400mmØ x 190mmH
- Adjustable to1500mm overall length
- 100mmØ ceiling rose

GU10

LED
GU10-HPLED-WH



- 520 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 MAX. 35W LED REPLACEABLE Manufactured in Germany

QH4097

- Available in black or white
- 130mmØ x 390mmH

Glass Single Pendants

High quality glass - adjustable length



E27

LED
GLSW-8EWW
• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | LED REPLACEABLE

QH9020
- Shade 100mmØ x 200mmH
- Ceiling fitter 100mmØ
- 1600mm overall length

E27 | MAX. 40W | LED REPLACEABLE

QH1011
- Dual shade construction - satin chrome inside, clear glass outside
- Internal reflector directs light downwards while perforations provide decorative effect
- Shade 100mmØ x 310mmH
- Ceiling fitter 110mmØ
- 1600mm overall length

E27 | MAX. 60W | LED REPLACEABLE

QH4277
- Shade 110mmØ x 250mmH
- Ceiling fitter 80mmØ
- 1600mm overall length

E27 | MAX. 60W | LED REPLACEABLE

QH9171-GO
Yarra Pendant
- Shade 540mmH x 230mmØ
- Ceiling fitter 100mmØ
- 1500mm overall length
- Gold metalwork

E27 | MAX. 60W | LED REPLACEABLE

QH5016
- Shade 240mmØ x 170mmH
- Ceiling fitter 100mmØ
- 1600mm overall length

E14

LED
CANC-4SEWW
• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

E14 | R50 | MAX. 60W | LED REPLACEABLE

QH2183
- Clear glass shade with Chrome
- Shade 130mmØ x 500mmH
- Adjustable 1500mmH overall length
- Ceiling fitter 100mmØ

GU10

LED
GU10D-HPLED-CW
• 375 total lm • Dimmable
• 5 Watts • 4,000K • CRI>80 • 38° Beam

GU 10 | MAX. 35W | LED REPLACEABLE

QH2123-1
- Mounting 115mmØ
- 1100mmL

Decorative Ceiling and Wall

Decorative interior lighting

ATOM



CP2012-CH

G4.0

HALOGEN
HCAP-10
Included
• 100 total lm • Dimmable
• 10 Watts • 3,000K • CRI>100



LED
CAP-3WLED-WW



• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

Note:
When using LED capsules one lamp must remain halogen to prevent flicker

12x G 4.0 MAX. 10W 12V LED REPLACEABLE

CP2012-CH
- Chrome
- 450mmØ x 560mmH
- Overall height adjustable up to 1160mm
- Transformer included
- Balls 62mmØ

GOTHIC SERIES



R6430-1B-SC

R6430-1B-BR



R6412-2B-BR

B22

LED
CANP-4BWW



• 280 total lm
• 4 Watts • 3,000K • CRI>80 • 210° Beam

2x B22 MAX. 60W LED REPLACEABLE

R6412-2B-BR
- Brown rugine
- 350mmW x 310mmH
- Mounting plates 125mmØ

E14

LED
CANP-4SEWW



• 280 total lm
• 4 Watts • 3,000K • CRI>80 • 210° Beam

E14 MAX. 60W LED REPLACEABLE

R6430-1B
- Available in brown rugine or satin chrome
- 870mmH x 190mmD

Translucent Glass Pendants

Suits clear LED lamps or carbon filament type lamps

GLOBE PENDANT LIGHTS



QH1621-AM



QH1632-AM



QH1635-AM



QH3749
Shown without wooden detail installed



QH3926



QH3993



QH3749

E27



LED
VINTAGE-8E64

- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 MAX. 10W LED REPLACEABLE

QH1621-AM
Globe pendant light
- Amber glass with antique brass cord set
- Shade 250mmØ
- Adjustable up to overall length 1200mmH
- Ceiling rose 100mmØ

E27 MAX. 10W LED REPLACEABLE

QH1632-AM
Globe pendant light
- Amber glass with antique brass cord set
- Shade 300mmØ
- Adjustable up to overall length 1200mmH
- Ceiling rose 100mmØ

E27 MAX. 10W LED REPLACEABLE

QH1635-AM
Globe pendant light
- Amber glass with antique brass cord set
- Shade 360mmØ
- Adjustable up to overall length 1200mmH
- Ceiling rose 100mmØ

E27 MAX. 60W LED REPLACEABLE

QH3926
Mida pendant light
- Smoke translucent glass shade with black cord set
- Shade 250mmH x 280mmØ
- Adjustable up to overall length 1500mmH
- Ceiling rose 100mmØ

E27 MAX. 60W LED REPLACEABLE

QH3993
Anna pendant light
- Clear glass shade with black cord set
- Shade 190mmH x 200mmØ
- Adjustable up to overall length 1500mmH
- Ceiling rose 100mmØ

E27 MAX. 60W LED REPLACEABLE

QH3749
Nojord pendant light
- Cognac translucent glass shade with wood detail and chrome cord set
- Shade 290mmH x 180mmØ
- Adjustable up to overall length 1500mmH
- Ceiling rose100mmØ

Euro Glass Pendants

Brilliant all round light effect, light ceilings, walls and floors with one light

ACID GLASS ROUND



QH200

QH290

QH400

E27

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 MAX. 100W LED REPLACEABLE

QH200
- Satin chrome
- Ball 250mmØ
- 1700mm overall length
- Mounting 100mmØ

E27 MAX. 100W LED REPLACEABLE

QH290
- Satin chrome
- Ball 290mmØ
- 1790mm overall length
- Mounting 100mmØ

E27 MAX. 100W LED REPLACEABLE

QH400
- Satin chrome
- Ball 400mmØ
- 2400mm overall length
- Mounting 100mmØ

Sophia Glass Globes

Mix & match your choice of shade and cordset
• 81mmØ mounting hole • 250mmØ glass globes • Purchase glass globe and cordset separately

Made in Spain



E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

Sophia Glass Globes only
Q209 Copper Metallic
Q210 Gold Metallic
Q211 Silver Metallic
Q222 White Mist
Q223 Silver Mist
Q316 Smoke
Q317 Blue
Q318 Rose

E27 | MAX. 40W | LED REPLACEABLE

CGK-BL
- Cord adjustable to 1600mm length
- 100mmØ ceiling rose
- Fits mounting holes 45-85mmØ
- Black satin paint finish/black braided cord
- 101mmØ shade cap
- Triple spring clip shade mounting

KATELYN CORDSET



CGK-BL

Metal Shades & Cordsets

Mix and match your choice
- 29mm mounting holes • Maximum wattage is dependant on lamp type and mounting fixture choices
- Sturdy Superlux shades can be made up as pendants or mounted directly onto ceiling batten holders



E14

LED
CANC-4SEWW

• 440 total lm
• 4 Watts • 3,000K • CRI>80 • 270° Beam

MAX. 50W

MSC
- Cone shade
- 80mmH x 155mmØ

E14 | MAX. 40W | LED REPLACEABLE

CGS
- 1500mm length
- 80mmØ ceiling rose
- Shade to have min 29mmØ mounting hole
- Available in black or chrome
- 40mmØ shade cap



MSB-BB Brushed Brass
MSB-BL Black
MSB-SC Satin Chrome
MSB-BS Brass
MSB-CH Chrome

MSC-BB Brushed Brass
MSC-BL Black
MSC-SC Satin Chrome
MSC-CO Copper
MSC-WH White

MAX. 50W

MSB
- Bell shade
- 80mmH x 128mmØ

MAX. 50W

MSC
- Cone shade
- 80mmH x 155mmØ

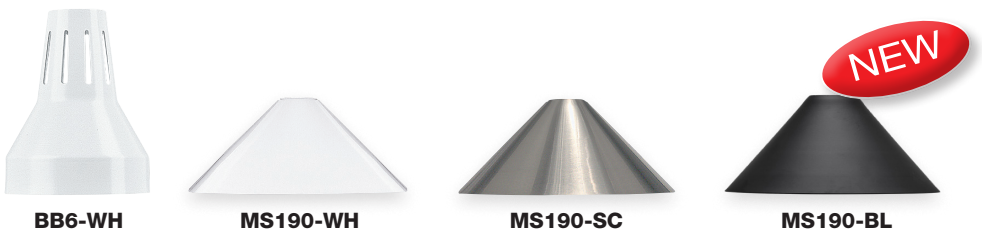

BB6-WH **MS190-WH** **MS190-SC** **MS190-BL**

MAX. 60W

MS190
- 90mmH x 190mmØ
- Suits self ballasted lamps or LED

BB6-WH
- Suits heat lamps
- 135mmØ x 180mmH

Lolita Glass Shades

Top quality Spanish translucent glass shades
- Choose from 2 cordsets

Made in Spain





MORRISON CORDSET

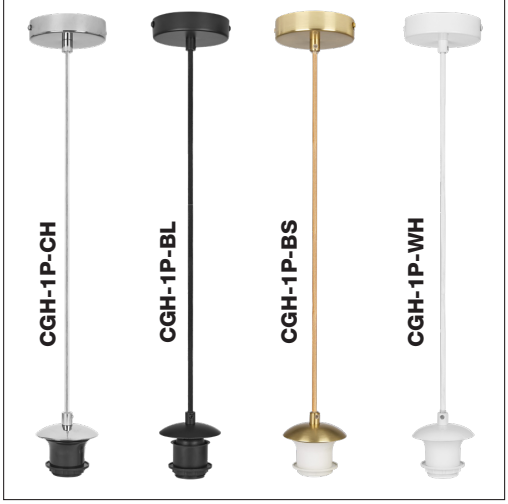

Lolita Shades
Q216 - Smoke
Q217 - Azule
Q218 - Rose
- 45mmØ mounting hole
- 250mmØ x 240mmH
- Glass only purchase cord set separately

B22

LED
GLSD-6BWW



- 450 total lm • Dimmable
- 6 Watts • 3,000K • CRI>81 • 270° Beam

B22 | MAX. 100W | LED REPLACEABLE

CGM-1P-SC
Cord Set
- Shade to have min 40mmØ mounting hole
- Adjustable to 1600mm
- Ceiling rose 120mmØ
- Available in satin chrome
- 80mmØ shade cap



E27

LED
GLOB-8E95



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
VINTAGE-8E64



- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | MAX. 60W | LED REPLACEABLE

CGH-1P
Morrison Cord Set
- Shade to have min 40mmØ mounting hole
- Adjustable to 1600mm
- 100mmØ ceiling rose
- Available in brushed brass, satin chrome, white or black
- 80mmØ shade cap

Quality Glass Shades

A selection of glass shades, see our suspension and cord set page and shade mounting pages for mounting options

- All measurements shown are in millimeters



GLASS SHADES



Q003
H=100 D=160 M=55



Q004
H=100 D=160 M=50
(Shade ring Q941)



Q005
H=100 D=160 M=55



Q013
H=160 D=175 M=145



Q020
H=175 D=180 M=70



Q022
H=175 D=180 M=70



Q040
H=140 D=135 M=50
(Shade ring Q941)



Q041
H=170 D=160 M=55



Q063
H=120 D=125 M=50



Q100
H=110 D=140 M=55
(Shade ring Q941)



Q138
H=120 D=118 M=47
(Shade ring Q941)

Q276
H=107 D=78 M=30



Q332
H=145 D=160 M=47
(Shade ring Q941)



Q333
H=165 D=200 M=70



Q372
H=130 D=130 M=44
(Shade ring Q941)



Q435
H=100 D=190 M=50
(Shade ring Q944)



Q447
H=90 W=80 M=29



Q448
H=95 D=80 M=29



Q458
H=130 D=360 M=40



Q532-BE MAX. 20W
H=60 D=140 M=29



Q532-GN MAX. 20W
H=60 D=140 M=29



Q508
H=90 D=80 M=29



Q541-BE MAX. 35W
H=120 D=100 M=29



Q541-GN MAX. 35W
H=120 D=100 M=29



Q573-CL MAX. 20W
H=86 D=80 M=29



Q547-BE MAX. 20W
H=94 D=80 M=29



Q547-ME MAX. 20W
H=94 D=80 M=29



Q547-AC MAX. 20W
H=94 D=80 M=29



Q622
H=200 D=100 M=29



Q630
H=110 W=85 M=29



Q634
H=200 W=100 M=29



Q697
H=105 D=150 M=45



Q723
H=110 D=105 M=55

Q763
H=130 D=122 M=30



Q873
H=85 D=175 M=40



DUPLEX GLASS

Q903
H=120 D=120 M=45



Q904
H=110 D=160 M=55



Q905
H=110 D=160 M=55



Q908
H=118 D=86 M=30



Q938
H=100 D=190 M=42
(Shade ring Q944)



Q981
H=300 D=200 M=29



Q983
H=160 D=200 M=29



Q985
H=235 D=150 M=29



Q986
H=180 D=170 M=29

GLASS SHADES FOR CEILING AND WALL LIGHTS



Q820-L 450mmØ
For: CL-2405 / CL820-32 / CL820-72
CL420-36



Q820-M 350mmØ
For: CL-2402 / CL820-22 / CL820-54
CL420-16 / CL420-24

Q820-S 300mmØ
For: CL-2401



Q820-W 340mmW x 100mmD
For: WL-2401 / WL320-8

ACRYLIC LENS

LENS-207S
290mmØ
For: CL207-12 / CL207-36

LENS-207L
410mmØ
For: CL207-24 / CL207-52

BULKHEAD/BOLLARD GLASS SHADES



QJ1000
L=190 W=130 H=75



QJ1050
H=75 Ø=165



QJ2000 for LJ2000,LJ7000
L=185 W=95 H=65



QJ2050 for LJ7051
H=68 Ø=163

BULKHEAD/BOLLARD GLASS SHADES



QJ2080
L=203 W=140 H=95



QJ3000
L=255 W=148 H=92



QJ3050
H=93 Ø=228



QC4025 Bollard Glass
H=150 Ø=84

BULKHEAD POLYCARBONATE LENSES



LENS-LJ5000
L=255 W=140 H=60



LENS-LJ5050
H=90 Ø=250



LENS-LJ6000
L=255 W=140 H=60



LENS-LJ6050
H=70 Ø=270

FABRIC SHADES

FS6 SHADES CLIP ONTO SMALL ROUND BULBS



FS6-NA



FS6-DG



FS6-PL
D=150 H=120



FS6-GY



FS6-IV

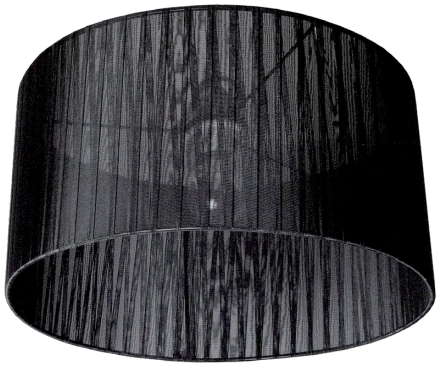

FS410-BL

FS410-BL
- Black voile ribbon shade only
- Purchase cord set separately
- Mount on cord set or directly to batten holder
- 410mmØ x 210mmH
- 42mmØ mounting hole
- Mount onto Superlux pendants CGH-1P or CGM-1P-SC
- Can be mounted onto standard 29mmØ batten holder or cord set using Q944 step ring

Shade Mounting Accessories

Accessories to mount and decorate light shades

GLASS FITTERS



Q922-WH



Q922-CH



Q922-BS

EXAMPLE



Q622 Shown with ceiling **Q922-CH** fitter

Q922
- For mounting directly onto batten holder
- 80mmØ x 36mmH
- Q945 fitter ring included



Q921 BS
98mmØ x 32mmH
Small brass fitter

EXAMPLE



Q138
Shown with ceiling **Q921** fitter



Q923 BS



Q923 WH

61Ømm x 10mmH
Glass top cap, brass & white

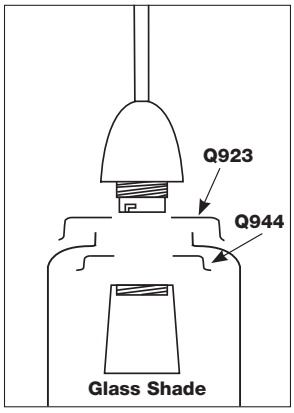

SHADE RINGS

- Sold in packs of 10



Q941 **Q940** **Q942** **Q943** **Q944** **Q945** **Q947**

	Q941 Shade ring- no flange	Q940 Shade ring- small flange	Q942 Shallow step ring	Q943 Medium step ring	Q944 Deep step ring	Q945 Flat ring	Q947 Bar for large glass
Outer (mm)Ø	54	65	65	60	59	59	100
Inner (mm)Ø	29	29	29	29	29	29	29
Height (mm)	9	9	4	8	15	1	4

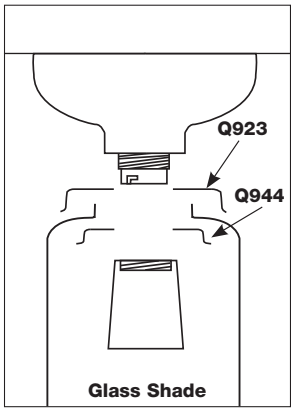

FLEXI ARM



FLX-250

FLX-250
- 250mmL
- Brass

WIRE KIT



DF-WIRE

DF-WIRE
Kit Includes:
- 1x 2 metre wire
- 1x ceiling mount
- 1x glider
- 2x M10 nuts

Suspensions & Cordsets

A selection of cordsets to fit a variety of shades

PENDANTS 40MMØ MOUNTING



E27 MAX. 60W LED REPLACEABLE

CGH-1P
Morrison Pendant
- Shade to have min 40mmØ mounting hole
- Adjustable to 1600mm
- 100mmØ ceiling rose
- Available in black, satin chrome, white or brushed brass
- 60mmØ shade cap

B22 MAX. 100W LED REPLACEABLE

CGM-1P-SC
- Shade to have min 40mm mounting hole
- Adjustable to 1200mm
- Ceiling rose 120mmØ
- Available in satin chrome
- 80mmØ shade cap

E27 MAX. 40W LED REPLACEABLE

CGK-BL
- Cord adjustable to 1600mm length
- 100mmØ ceiling rose
- Fits mounting holes 45-85mmØ
- Black satin paint finish/black braided cord
- 101mmØ shade cap
- Triple spring clip shade mounting

CHAIN PENDANTS



B22 MAX. 60W LED REPLACEABLE

CHAIN PENDANTS
- Overall length 950mm
- Shade to have min 29mm mounting hole
- 110mmØ ceiling rose

PENDANTS 29MMØ MOUNTING

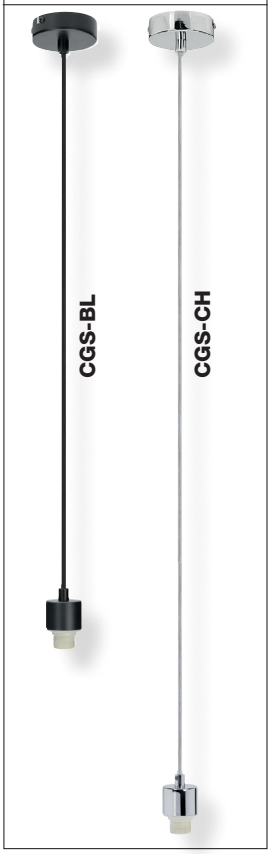

E14 MAX. 40W LED REPLACEABLE

CGS
- 1500mm length
- 80mmØ ceiling rose
- Shade to have min 29mmØ mounting hole
- Available in black or chrome
- 40mmØ shade cap

CHAINS

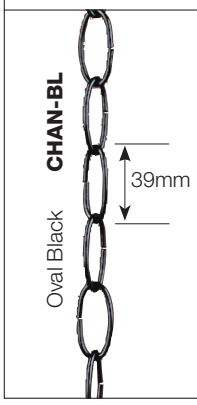

CHAIN
- Chain sold in 5M lengths
- 3mmØ gauge
- Can be linked together to create longer lengths
- Max weight 4kg

TRANSPARENT CORD

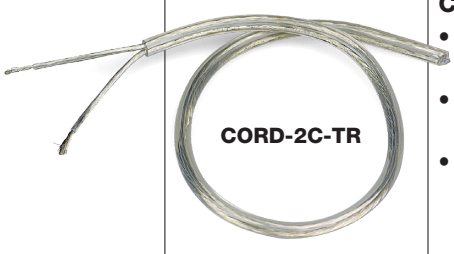

CORD-2C-TR
- 2 core transparent silver cable
- Sold per metre, cut to length
- 2 x 0.75mm² tinned copper

Pathway Recessed Lights

Interior non-direct lights for glare free guidance lighting in hallways and stairwells

LED DEFLECTOR LIGHTS



LRL133-SC

INTEGRAL LED
• 240 total lm
• 3 Watts • 3,000K • CRI>80

LRL133
- 90mmØ, cut 75mmØ hole
- Electronic control gear included
- 35 lux at 400mm

CAPSULE DEFLECTOR LIGHTS



SV133-SC

G4.0
HALOGEN
HCAP-10
Included
• 100 total lm • Dimmable
• 10 Watts • 3,000K • CRI>100

G 4.0 | 12V | MAX. 10W | 135 | III

SV133
- 90mmØ
- Cut 75mmØ hole
- Clear safety glass
- Purchase control gear separately

G4.0
LED
CAP-3WLED-WW
• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

DEFLECTOR LIGHT



LL8201



LL20103-SI

G 4.0 | IP 66 | MAX. 10W | 12V

IC-4 | LED REPLACEABLE | III

LL20103
- Recessed deflector light
- Die cast aluminium
- Face 112mmH x 70mmW
- Cavity 65mmD
- Tempered glass
- Stainless steel screws
- Use halogen or LED capsule
- Purchase control gear separately
- Interior or exterior use

LL8201
- Optional mounting box for LL20103 deflector light
- 113mmH x 72mmW x 65mmD

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LRL133	IC	Closed	Cover over - non flammable	Yes	75mm	80mm	10mm
SV133	CA135	Closed	Side Abutted	Yes	75mm	48mm	20mm
LL20103	IC-F	Closed	Cover over	Yes	62 x 95mm	65mm	0mm

LED Recessed Wall lights

No control gear required. Wire direct to 230Volt supply

• IP65 ingress protection front face • Supplied with mounting niche • Easy to install • For installation in dry cavity walls

PLAIN



LRL112-SS



LRL112-WH



LRL112-BL

INTEGRAL LED
• 75 total lm
• 1.5 Watts • 3,000K • CRI>80

LRL112
- Face 80mm square x 4mmD body 60mm depth
- Control gear in body
- 85 lux at 400mm
- Suitable for wet areas such as bathrooms
- All trims are 304 Brushed Stainless Steel, White or Black painted finish
- Plastic opaque lens

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LRL112	IC	Closed	Cover over - non flammable	Yes	70 x 70mm	60mm	0mm

For exterior and interior applications

• Extra clips supplied for direct mounting into interior walls • Supplied with mounting niche for exterior installation
• Epistar LED technology • Made from die cast aluminium • Integral control gear

LED DEFLECTOR LIGHTS

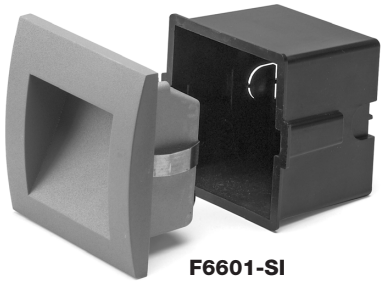

F6601-SI



F6601-WH



F6603-WH



F6602-WH







Hole sizes:

MODEL	F6601	F6602	F6603
Hole for plastic niche	79mm Wide 79mm High	125mm Wide 63mm High	125mm Wide 115mm High
Hole for direct mounting in wall lining Note: Make test cut using off-cut of board being used	71mm Wide 71mm High	114mm Wide 53mm High	116mm Wide 116mm High

INTEGRAL LED
• 90 total lm
• 1 Watt • 3,000K • CRI>80

IP 65

F6601
- 90mm square
- 60mm recessed cavity depth

INTEGRAL LED
• 290 total lm
• 3 Watts • 3,000K • CRI>80

IP 65

F6602
- 70mmH x 140mmW
- 60mm recessed cavity depth

INTEGRAL LED
• 290 total lm
• 3 Watts • 3,000K • CRI>80

IP 65

F6603
- 140mm square
- 60mm recessed cavity depth

Reccessed Deflector Lighting

Floor and step lighting applications

• Modern indirect lighting • Accent lighting of feature walls and pictures etc
• Accentuation of architectural features • Interior only



LRD76-SI (LED)
or
SDV76-SI (G5.3)



SDL235-SI

INTEGRAL LED
• 428 total lm
• 4 Watts • 3,000K • CRI>80

LRD76-SI
- Recessed LED deflector light
- Integral driver
- Flange 90mm x 90mm

G5.3

LED
CAP-3WLED-WW



• 150 total lm
• 3 Watts • 3,000K • CRI>80 • 360° Beam

G 5.3 | 12V | III | MAX. 35W | 76 x 76mm | LED REPLACEABLE

SDV76-SI
Mount low on walls for floor or tread lighting
- Outside dimensions 90mmH x 90mmW
- Cavity depth 105mm
- Purchase transformer separately

INTEGRAL LED
• 665 total lm
• 10 Watts • 3,000K • CRI>80

220V-240V | 10 Watt | 235 x 180mm

SDL235-SI
- Outside dimensions 245mmH x 190mmW
- Cavity depth 105mm

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LRD76	IC	Closed	Cover over - non flammable	Yes	76mm x 76mm	90mm	20mm
SDL235	IC	Closed	Cover over - non flammable	Yes	235mm x 180mm	90mm	20mm

Recessed LED Lights

High quality materials and finishes
• Use constant voltage 12V AC 50Hz or DC power supply • Use Superlux GV-T60 or SLED-IPEC30 control gear

RYLAND PATH AND STEP LIGHT



LLED20103-BL LLED20103-WH LLED20101-CC LLED20101-SI



Mounting Box
LL8201
- Optional mounting box for LLED20103 and LLED20101 deflector lights
- 70mmW x 112mmH x 65mmD

INTEGRAL LED
• 135 total lm
• 1.5 Watts • 3,000K • CRI>80

IP 66 | CV 12V | IC-4 | III

LLED20103 Deflector
LLED20101 Eyelid
- 112mmH x 70mmW x 56mmD
- Cavity depth 65mm
- Frosted glass lens
- Made from hi-grade die-cast aluminium
- Comes pre-wired with 500mmL cable
- Purchase driver separately

Aluminium Brick Lights

Economy series



Brick recess, plain **C3005-BL**



Brick recess, plain **C3005-WH**



Brick recess, louvre **C3009-BL**



Brick recess, louvre **C3009-WH**

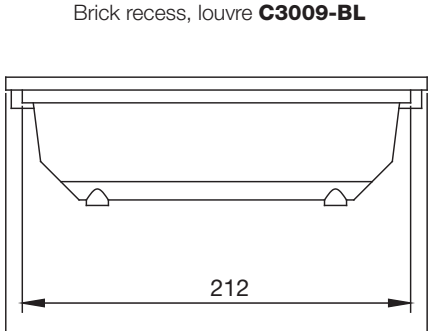



E27
LED
SBL-8EWW
• 806 total lm
• 8 Watts • 3,000K • CRI>80 • 280° Beam



E27 | MAX. 40W | IP 54 | LED REPLACEABLE

Aluminium recessed flush mounted brick lights

For coastal and highly exposed conditions we recommend use of Superlux polycarbonate fittings

Recessed LED Lights

High quality materials and finishes
• Wire direct to mains power supply • Driver integral in body

BERTLAND LED BRICKLIGHTS

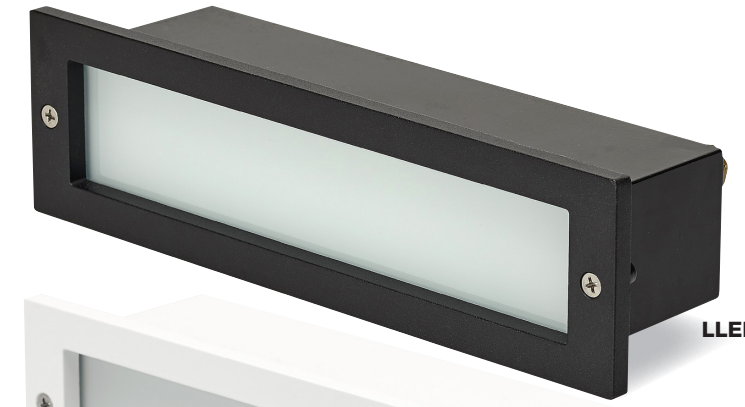

LLED2000-BL



LLED2000-WH



LLED2002-BL



LLED2002-WH



LL8200

INTEGRAL LED
• 324 total lm
• 3.6 Watts • 3,000K • CRI>80

IP 66 | 220V-240V | IC-4

LLED2000
Bertland Plain Bricklight
LLED2002
Bertland Louvre Bricklight
• 70mmH x 252mmW
• Cavity depth 76mm
• Frosted glass lens
• Made from hi-grade die-cast aluminium
• Available in black or white
• Comes pre-wired with 500mmL cable

LL8200
• Optional mounting box for LLED2000 or LLED2002 lights
• 70mmH x 252mmW x 80mmD

Surface Mount LED Brick Lights

No Recessing required

• Interchangeable covers simply click onto the main body • Covers supplied separately • Covers available in 3 colours; charcoal, silver or white • Polycarbonate body and lens - covers made from ABS • Indoor & outdoor use • Integral control gear

220V-240V

RECTANGULAR PLAIN



LK2301 (Body)



LK2331-CC



LK2331-SI

LK2331-WH

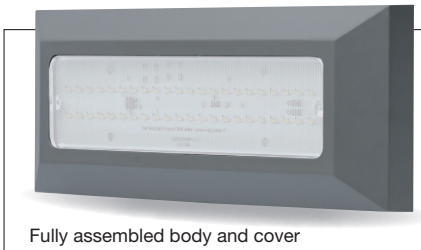

Fully assembled body and cover

HORIZONTAL DEFLECTOR



LK2302 (Body)



LK2332-CC



LK2332-SI



LK2332-WH

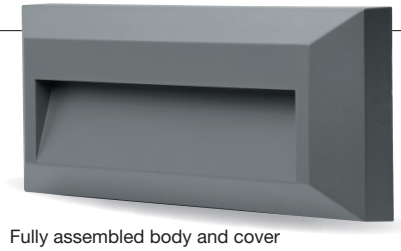

Fully assembled body and cover

INTEGRAL LED
• 300 total lm
• 3.8 Watts • 3,000K • CRI>80

IP 65

LK2301
• 3.8 Watt integral LED main body, wall or ceiling mount
• 230mmL x 80mmW x 22mm depth

LK2331
• Cover only, place onto LK2301

INTEGRAL LED
• 110 total lm
• 1.8 Watts • 3,000K • CRI>80

IP 65 LIGHT CUT OFF

LK2302
• 1.8 Watt integral LED main body
• 230mmL x 80mmW x 22mm depth
• ULOR = 0.9%

LK2332
• Cover only, place onto LK2302

VERTICAL DEFLECTOR

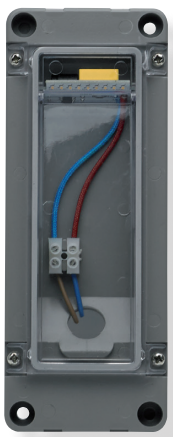

LK2303 (Body)



LK2333-CC



LK2333-SI



LK2333-WH



Fully assembled body and cover

INTEGRAL LED
• 50 total lm
• 1 Watt • 3,000K • CRI>80

1 Watt IP 65

LK2303
• 1 Watt integral LED main body
• 200mmH x 80mmW x 22mm depth

LK2333
• Cover only, place onto LK2303

Square LED Surface Lights

Interchangeable covers click onto the main body

• Surface mounted, no recess required • Covers supplied separately • Covers available in 3 colours; charcoal, silver or white • 124mm square x 22mm depth • Polycarbonate body and lens - covers made from ABS • Indoor & outdoor use • Integral control gear wire directly to mains

220V-240V

SQUARE PLAIN



LK1401 (Body)



Fully assembled body and cover

INTEGRAL LED
• 300 total lm • 120° Beam
• 3.8 Watts • 3,000K • CRI>80

IP 65

LK1401
• 3.8 Watt integral LED main body, wall or ceiling mount



LK1441-CC



LK1441-SI



LK1441-WH

LK1441
• Cover only, place onto LK1401

SQUARE DEFLECTOR



LK1403 (Body)



Fully assembled body and cover

INTEGRAL LED
• 70 total lm
• 1.5 Watts • 3,000K • CRI>80

IP 65 LIGHT CUT OFF

LK1403
• 1.5 Watt integral LED main body
• ULOR = 0.2%



LK1443-CC



LK1443-SI



LK1443-WH

LK1443
• Cover only, place onto LK1403

Surface Mount Pathway Lights

Interchangeable covers click onto the main body

• Surface mounted, no recess required • Covers supplied separately
• Covers available in 3 colours; charcoal, silver or white • Polycarbonate body & lens - covers made from ABS
• Indoor & outdoor use • Integral control gear wire directly to mains

220V-240V

MINI DEFLECTOR



LK1000 (Body)



Fully assembled body and cover



LK1001-CC



LK1001-SI



LK1001-WH

INTEGRAL LED
• 100 total lm
• 1.5 Watts • 3,000K • CRI>80

IP 65 LIGHT CUT OFF

LK1000
• 1.5 Watt integral LED main body
• 100mmL x 60mmH x 31mm depth
• ULOR = 1.3%

LK1001
• Cover only, place onto LK1000

MAX DEFLECTOR

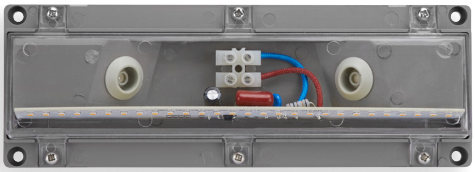

LK1200 (Body)



Fully assembled body and cover



LK1201-CC



LK1201-SI



LK1201-WH

INTEGRAL LED
• 250 total lm
• 4 Watts • 3,000K • CRI>80

IP 65

LK1200
• 4 Watt integral LED main body
• 220mmL x 80mmH x 34mm depth
• ULOR = 12.7%

LK1201
• Cover only, place onto LK1200

Round LED Surface Lights

Interchangeable covers click onto the main body

• Surface mounted, no recess required • Covers supplied separately • Covers available in 3 colours; charcoal, silver or white • 150mmØ x 22mm depth • Polycarbonate body and lens - covers made from ABS • Indoor & outdoor use • Integral control gear wire directly to mains

220V-240V

ROUND PLAIN



LK1501 (Body)

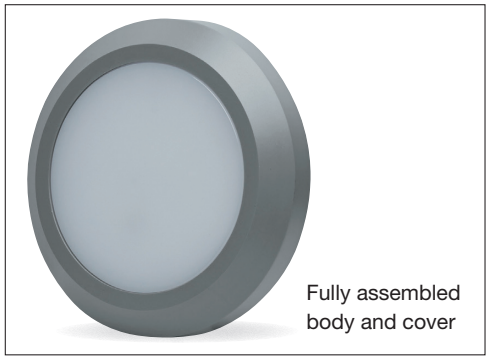

Fully assembled body and cover



LK1551-CC



LK1551-SI



LK1551-WH

INTEGRAL LED

• 300 total lm • 110° Beam
• 3.8 Watts • 3,000K • CRI>80

IP 65

LK1501

• 3.8 Watt integral LED main body, wall or ceiling mount

LK1551

• Cover only, place onto LK1501

ROUND DEFLECTOR



LK1503 (Body)

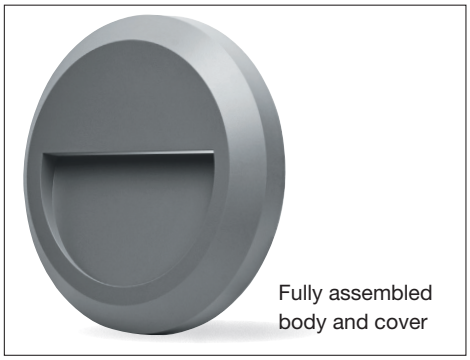

Fully assembled body and cover



LK1553-CC



LK1553-SI



LK1553-WH

INTEGRAL LED

• 90 total lm
• 1.7 Watts • 3,000K • CRI>80

IP 65 LIGHT CUT OFF

LK1503

• 1.7 Watt integral LED main body
• ULOR = 0.6%

LK1553

• Cover only, place onto LK1503

6000 Series Stainless Bulkheads

UV stabilised, & supplied with stainless steel screws
• New Zealand & Australian registered® designs • Polycarbonate diffuser

IK10 | IP 55 | 316 Stainless Steel | Made in NZ

STAINLESS TRIM



LJ6001-SS
LJL6001-SS



STAINLESS BAR GRILL



LJ6002-SS
LJL6002-SS



INTEGRAL LED
• 900 total lm
• 10 Watts • 3,000K • CRI>80

LJL6001, LJL6002

OR

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

LJ6001, LJ6002

E27 | MAX. 60W | LED REPLACEABLE

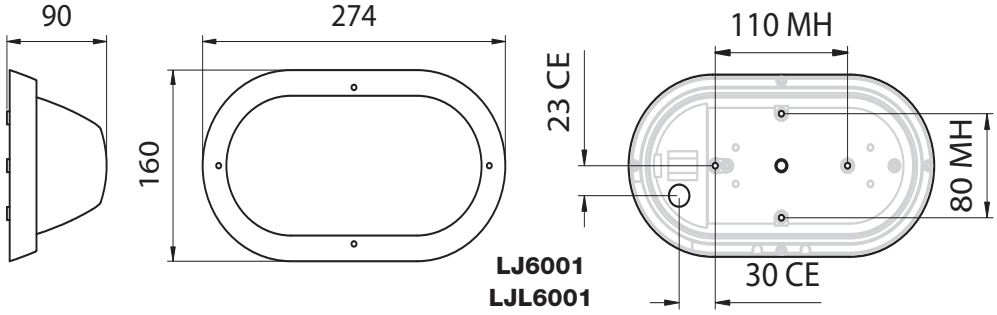

LJ6001
LJL6001

6000 Series Polycarbonate Bulkheads

UV stabilised and supplied with stainless steel screws
- New Zealand and Australian registered® designs
- Genuine lexan polycarbonate base and diffuser • IP55

10 YEAR ANTI-CORROSION GUARANTEE

IK10

Made in NZ

E27

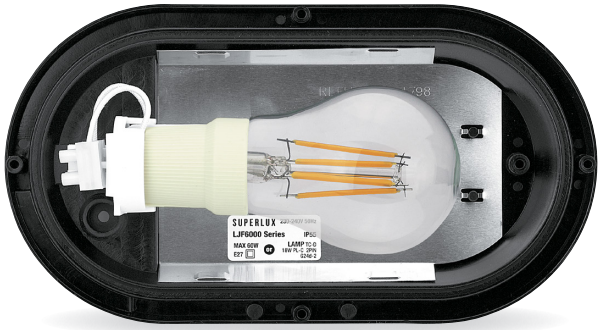

LJ 6001/2/3/4

E27

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | IP 55 | LED REPLACEABLE

LJ 6001/2/3/4

LED



LJL 6001/2/3/4

INTEGRAL LED
- 900 total lm
- 10 Watts • 3,000K • CRI>80

IP 55

LJL 6001/2/3/4

LED MODULE ASSEMBLY-OVAL

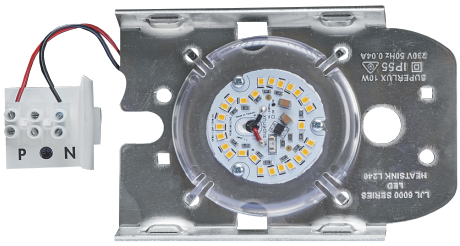

L238

L238
LED module assembly-oval
- LED heatsink + terminal block
- To convert or replace LJ600X series or LJL600X series

CONDUIT CONNECTOR



LJ6000-CON

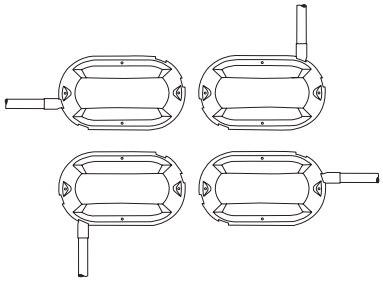

LJ6000-CON
Optional accessories
- Conduit connection device for use with 20mmØ condiut
- Can be used with all 6000 series bulkheads
- Conduit converter kit for easy connectability of bulkheads

6000 Series Polycarbonate Bulkheads

20 trim options each with 2 different lamp options E27 or LED

10 YEAR ANTI-CORROSION GUARANTEE

WHITE



LJ6001-WH
LJL6001-WH



LJ6002-WH
LJL6002-WH



LJ6003-WH
LJL6003-WH



LJ6004-WH
LJL6004-WH

BLACK



LJ6001-BL
LJL6001-BL



LJ6002-BL
LJL6002-BL



LJ6003-BL
LJL6003-BL



LJ6004-BL
LJL6004-BL

SILVER GREY



LJ6001-SG
LJL6001-SG



LJ6002-SG
LJL6002-SG



LJ6003-SG
LJL6003-SG



LJ6004-SG
LJL6004-SG

GRANITE



LJ6001-GR
LJL6001-GR



LJ6002-GR
LJL6002-GR



LJ6003-GR
LJL6003-GR



LJ6004-GR
LJL6004-GR

COPPER



LJ6001-CO
LJL6001-CO



LJ6002-CO
LJL6002-CO



LJ6003-CO
LJL6003-CO

LJ6004-CO
LJL6004-CO



SENSOR LIGHT



LJS6003-BL

PIR SENSOR

E27 | IP 55 | MAX. 60W

LJS6003-BL

- 6m x 100° range
- 100° feild angle
- Photocell sensitivity adjustable
- On/off time adjustable
- Available in E27 black eyelid configuration only





6051 Series Polycarbonate Bulkheads

UV stabilised and supplied with stainless steel screws
• New Zealand and Australian copyright designs • Polycarbonate diffuser

10 YEAR ANTI-CORROSION GUARANTEE

IK10

Made in NZ

E27



LJ6051

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 75W | IP 55 | LED REPLACEABLE

LJ6051

LED



LJL6051

INTEGRAL LED
• 1300 total lm
• 150 Watts • 3,000K • CRI>80

IP 55

LJL6051

LED MODULE ASSEMBLY-ROUND

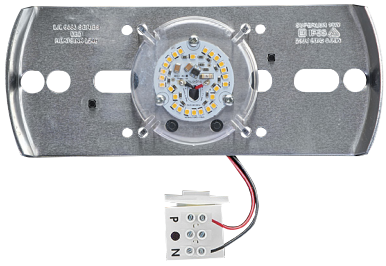

L260

L260
LED module assembly-round
• LED heatsink + terminal block
• To convert or replace LJ6051 and LJL6051

CONDUIT CONNECTOR



LJ6000-CON



LJ6000-CON
Optional accessories
• Conduit connection device for use with 20mmØ condiut
• Can be used with all 6000 series bulkheads
• Conduit converter kit for easy connectability of bulkheads

6051 Round Polycarbonate Bulkheads

3 colour trim options each with 2 different lamp options E27or LED

10 YEAR ANTI-CORROSION GUARANTEE

IK10

Made in NZ

BLACK



LJ6051-BL (E27)
or
LJL6051-BL (LED)

WHITE



LJ6051-WH (E27)
or
LJL6051-WH (LED)

316 STAINLESS STEEL



LJ6051-SS (E27)
or
LJL6051-SS (LED)



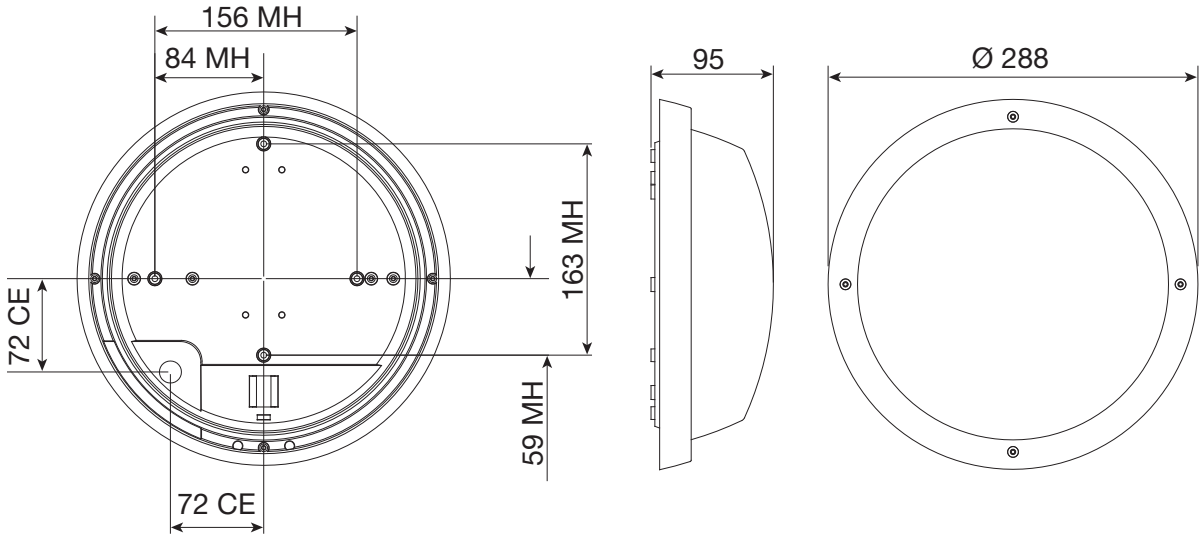

LJ6050 SERIES

LED Marco Bulkheads

Polycarbonate body & lens, ABS covers

• Interchangeable covers fit onto the body • 300mmØ x 90mm depth • Covers supplied separately
• Wall or ceiling mount • Covers available in 3 colours: charcoal, silver or white • Integral control gear

ROUND MARCO BODY

SENSOR Model



LK3050
(Without sensor)



LKS3050
(With sensor)

Exploded view

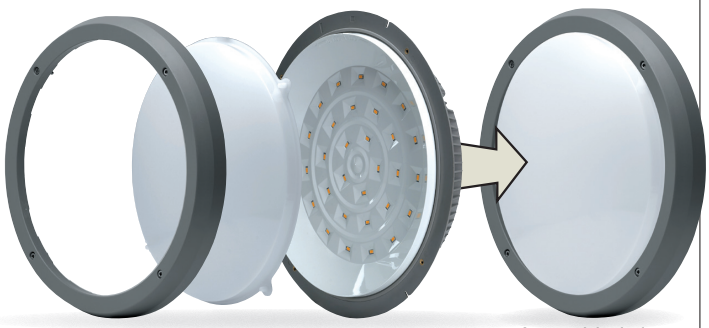

COVER **LENS** **BASE** Assembled view

(Lens supplied with body kit)

PLAIN MARCO COVER



LK3051-CC



LK3051-SI



LK3051-WH

GUARD MARCO COVER



LK3052-CC



LK3052-SI



LK3052-WH

EYELID MARCO COVER



LK3053-CC



LK3053-SI



LK3053-WH

***INTEGRAL* LED**

• 1200 total lm
• 13.5 Watts • 3,000K • CRI>80

IP 65

LK3050

• 13.5 Watt integral LED bulkhead body
• Supplied in silver only

IP 65

LKS3050

• 13.5 Watt integral LED bulkhead body with motion sensor
• Supplied in silver only

SENSOR:

• 360° detection angle
• Detection range up to 8 metres
• Time setting 5sec to 15min
• Lux detection 2 to 50 or disable lux

LK3051 *(cover only)*

• Fits LK3050 or LKS3050 bodies

LK3052 *(cover only)*

• Fits LK3050 or LKS3050 bodies

LK3053 *(cover only)*

• Fits LK3050 or LKS3050 bodies

LED Columbus Bulkheads

Polycarbonate body and lens - covers made from ABS

- Interchangeable covers fit onto the main body • Covers supplied separately • Wall or ceiling mount
- Use with or without covers • Covers available in 3 colours; charcoal, silver or white • Indoor & outdoor use
- Integral control gear wire directly to mains

OVAL COLUMBUS BODY

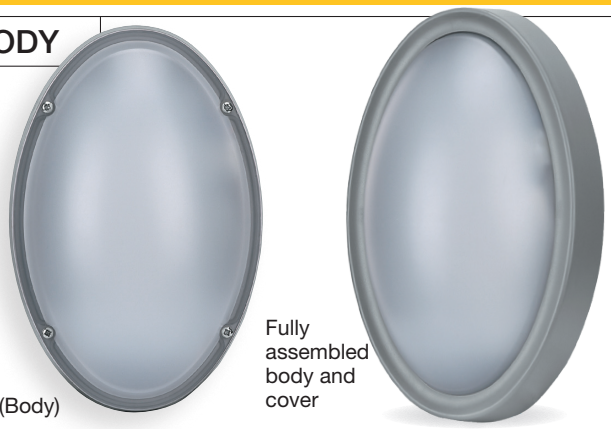

LK2300 (Body)

Fully assembled body and cover

INTEGRAL LED
- 500 total lm
- 8 Watts • 3,000K • CRI>80

IP 65

LK2300
- 8 Watt integral LED main body
- 215mmL x 145mmH x 65mmD
- Vertical or horizontal mount

OVAL COLUMBUS COVERS



LK2310
- Cover only, place onto LK2300

Lytton LED Bulkhead

High power 30 Watt LED bulkhead



LJX8830-CC

INTEGRAL LED
- 1567 total lm
- 30 Watts • 3,000K • CRI>80

IP 65

LJX8830-CC
- 30 Watt integral LED
- Wall or ceiling mount
- Integral driver
- 350mmØ x 85mm depth
- Made from durable polycarbonate

Duralite Range

Duracast composite resin casting, diffuser made from UV resistant polycarbonate

Manufactured in Italy

ZEN BULKHEAD WITH VERTICAL EYELID



DUW8270-BL



DUW8270-SI

E27

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | 220V-240V | MAX. 42W | IP 65 | LED REPLACEABLE

DUW8270
DUW8273

- 260mmW x 110mmH x 140mmD



ZEN BULKHEAD WITH HORIZONTAL EYELID



DUW8273-BL



DUW8273-SI

DURALITE Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

LED Polo Bulkheads

Polycarbonate body and lens - covers made from ABS

• Interchangeable covers fit onto the main body • Covers supplied separately • Wall or ceiling mount
• UV resistant and anti-corrosive • Indoor & outdoor use • Integral control gear wire directly to mains

POLO BODY



LK2240
(Body)



Fully assembled body and cover

INTEGRAL LED
• 1200 total lm
• 13.5 Watts • 3,000K • CRI>80

IP 65

LK2240
Polo body
• 13.5 Watt integral LED bulkhead body
• 220mm square x 55mm depth
• Body is silver

POLO COVERS



LK2241-CC
(Cover)



LK2241-SI
(Cover)



LK2241-WH
(Cover)

LK2241
Polo cover
• Cover only, place onto LK2240
• Covers available in 3 colours; charcoal, silver or white

POLO GRAND

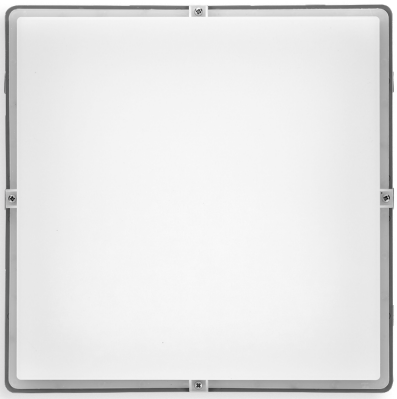

LK3340
(Body)



Fully assembled body and cover

INTEGRAL LED
• 1400 total lm
• 16 Watts • 3,000K • CRI>80

IP 65

LK3340
Polo Grand body
• 16 Watt integral LED bulkhead body
• 300mm square x 78mm depth
• Body is silver

POLO GRAND COVERS



LK3341-BL
(Cover)



LK3341-WH
(Cover)

LK3341
Polo Grand cover
• Cover only, place onto LK3340
• Covers available in 2 colours; black or white

Downward Bulkheads

Corrosion resistant polycarbonate bulkheads
indoor/outdoor use, weatherproof IP rating

Corrosion Resistant

ARTTICUS



LJ2026-WH



LJ2026-BL



LJY204-BL

INTEGRAL LED
• 700 total lm • 110° Beam
• 12 Watts • 3,000K • CRI>80

IP 65

LJ2026
Artticus bulkhead
- 12 Watt LED bulkhead
- Wall or ceiling mount
- Made from polycarbonate
- 265L x 100mmH x 100mmD with ABS trim
- UV resistant

INTEGRAL LED
• 640 total lm
• 8 Watts • 3,500K • CRI>80

IP 65

LJY204
- Available in black
- 204mmØ x 84mmD
- Electronic driver included in base
- Made from durable polycarbonate

Nylon 66 7000 Series Bulkheads

No flaking paint
• Nylon 66 with glass lens

7000 SERIES OVAL



LJ7001-WH



LJ7002-BL



LJ7003-BL

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | IP 54 | LED REPLACEABLE

7000 OVAL SERIES
- 205mmL x 118mmW x 105mmH

Frame Wall Lights

Choose from integral LED or LED replaceable options



SB8204-AB



LH2845-CC

E27 | IP 44 | MAX. 10W | LED REPLACEABLE

SB8204-AB
Buxton wall light
- 250mmH x 160mmW x 110mmD
- Mounting base 210mmH x 155mmW
- Antique brass finish stainless steel with glass lens

INTEGRAL LED
- 780 total lm
- 12 Watts • 3,000K • CRI>80

IP 65

LH2845-CC
Shoji wall light
- Aluminium body
- Polycarbonate lens
- Exterior or interior use
- 220mmH x 110mmW x 80mmD
- Mounting base 200mmH 95mmW

LED Frankie Wall Lights

Up down wall lighting
• Available in black or white • Exterior & interior • Made from polycarbonate and ABS • UV resistant



LH1701-BL



LH1701-WH



LH2300-BL



LH2300-WH

INTEGRAL LED
- 500 total lm
- 9 Watts • 3,000K • CRI>80

IP 65

LH1701
Frankie Mini
- 9 Watt LED up and down wall light
- 170mmW x 46mmH x 80mmD



INTEGRAL LED
- 800 total lm
- 12 Watts • 3,000K • CRI>80

IP 65

LH2300
Frankie Max
- 12 Watt LED up and down wall light
- 230mmW x 90mmH x 100mmD

Economy Aluminium Bulkheads

Cast aluminium body with tempered glass diffuser
- Stainless screws

1000 SERIES



LJ1001-BL

E27

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | IP 54 | LED REPLACEABLE

LJ1001
- Oval lights
- 215mmL x 145mmW x 100mmH

2000 SERIES



LJ 2003-WH



LJ 2003-BL

E27 | MAX. 60W | IP 54 | LED REPLACEABLE

LJ 2003
- 200mmL x 110mmW x 100mmH

2080 SERIES



LJ 2080-WH



LJ 2080-BL

E27 | MAX. 60W | IP 53 | LED REPLACEABLE

LJ 2080
- 220mmL x 157mmW x 120mmH
- Glass lens

Metal Bulkheads

Metal construction exterior lights

ALUMINIUM



LJ2081-CC



C2942-BL

INTEGRAL LED
• 592 total lm
• 12 Watts • 3,000K • CRI>80

IP 54

LJ2081-CC

Echo bulkhead light
- Light in all directions
- 12 Watt LED
- 200mmW x 100mmH x 90mmD
- Made from aluminium with polycarbonate diffuser

E27
LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | IP 54 | LED REPLACEABLE

C2942-BL

Percy ceiling bulkhead
- 280mmØ x 130mmD
- Glass lens
- Powder coated aluminium

304 STAINLESS



SB1610



SB1650

E27 | MAX. 60W | 304 Stainless Steel | IP 54 | LED REPLACEABLE

SB1610
- Glass lens
- 310mmØ x 99mmH

2x E27 | MAX. 60W | 304 Stainless Steel | IP 54 | LED REPLACEABLE

SB1650
- Glass lens
- 410mmØ x 121mmH

Triangle Aluminium Lighting

Long life durable commercial fittings
- Unique corrosion-resistant aluminium fittings
- Tempered opal glass diffuser • Vandal resistant louvre models

IK8 | IP 65 | Manufactured in Italy

SMALL LED



GT5608-BL



GT5608-SI



GT5614-BL

MIDI LED



GT5621-BL



GT5621-SI



GT5627-BL



GT5627-SI

MAXI LED



GT5638-BL

SUPER MAXI

IK10

GT5223-BL



INTEGRAL LED
- 850 total lm
- 8.5 Watts • 4,000K • CRI>80

GT5608
- 8.5 Watt LED plain opal
- 207L x 116 x 116

LIGHT CUT OFF

GT5614
- 8.5 Watt LED louvred
- 207L x 116 x 116
- ULOR = 0%

INTEGRAL LED
- 1770 total lm
- 17 Watts • 4,000K • CRI>80

GT5621
- 17 Watt LED plain opal
- 323L x 116 x 116

LIGHT CUT OFF

GT5627
- 17 Watt LED louvred
- 323L x 116 x 116
- ULOR = 0%

INTEGRAL LED
- 3400 total lm
- 34 Watts • 4,000K • CRI>80

GT5638-BL
- 34 Watt LED plain opal
- 500mmL x 116mmH

INTEGRAL LED
- 5650 total lm
- 58 Watts • 4,000K • CRI>80

GT5223-BL
- 58 Watt LED
- 1348mmL x 116mmH
- Polycarbonate lens

OPTIONAL BRACKET

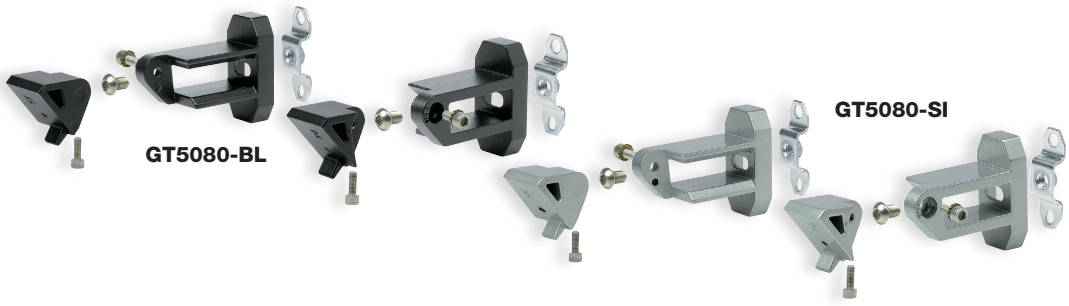

GT5080-BL

GT5080-SI

Tiltable mounting bracket



goccia
SOLE AGENCY

Docks Goccia Bulkheads

LED uniform light glow across the lens

- The high grade Docks range features a base made from marine aluminium with a polished reflector
- Supplied with silicon gasket to provide a IP66 rating
- Pressed lens with external fabricated bare metal 316 stainless steel trim
- Supplied with stainless screws

Made in Italy

316 STAINLESS



GD9106 -SS



GD9130-SS



GD9136-SS

INTEGRAL LED
- 1420 total lm
- 14 Watts • 4,000K • CRI>80

316 Stainless Steel | IP 66 | Made in Italy

GD9106-SS
- 268mmØ x 118mmD
- Now with IK10 opal polycarbonate diffuser

GD9130-SS
- 268mmØ x 129mmD

GD9136-SS
- 268mmØ x 129mmD

Kasko Outdoor Lighting

Italian made Kasko available in 5 models finished in architectural silver

• Post mount option for large round models • Polycarbonate diffusers and high grade aluminium bodies • Suits conduit connection

Manufactured in Italy



GK 8695-SI



GK 8690-SI



GK 8790-SI



GK 8190-SI



GK 8890-SI

E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

E27 | IP 65 | MAX. 75W | IK10 | LED REPLACEABLE

GK 8695-SI
- Large opal eyelid, 260mmØ

MAX. 60W

GK 8690-SI
- Small opal eyelid, 198mmØ

MAX. 60W

GK 8790-SI
- Opal vertical eyelid 268mm x 166mm

GK 8190-SI
- Opal guarded 267mm x 166mm

GK 8890-SI
- Opal horizontal eyelid 268mm x 166mm

Jack Interchangeable Bulkheads

Interchangeable covers simply click on to the body
• Covers supplied separately • Black polycarbonate body • Opal diffuser
• Side or rear cable entry by means of gland or conduit

IP 65 | IK8 | Manufactured in Italy

JACK COVERS



GJ2213-SI GJ2213-WH GJ2213-BL

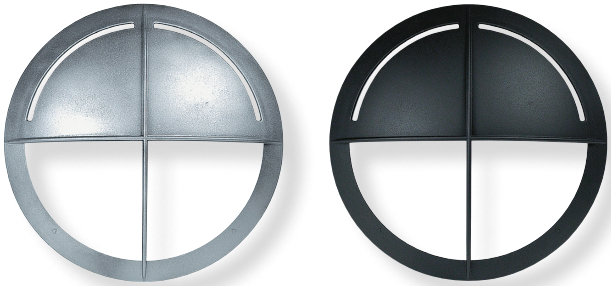

GJ2214-SI GJ2214-BL

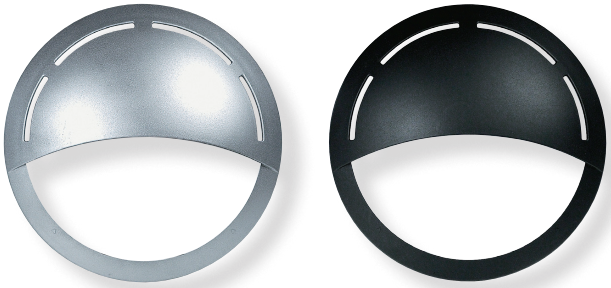

GJ2215-SI GJ2215-BL

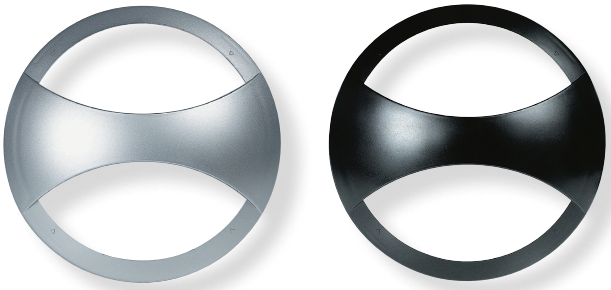

GJ2216-SI GJ2216-BL

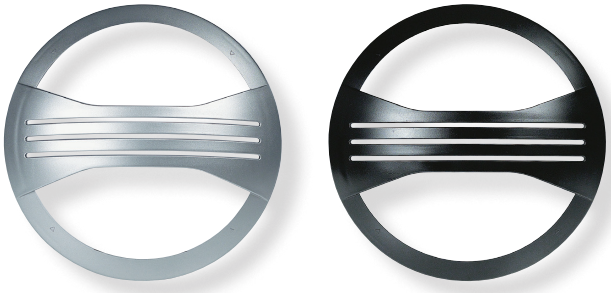

GJ2217-SI GJ2217-BL





ROUND JACK BODY



GJ2201



GJ2101

E27

LED
SBL-8EWW
• 806 total lm
• 8 Watts • 3,000K • CRI>80 • 250° Beam



E27 | MAX. 75W | LED REPLACEABLE

GJ2201

INTEGRAL LED
• 1100 total lm
• 10 Watts • 4,000K • CRI>80

10 Watt

GJ2101
• Up to 50,000 hours life
• Opal polycarbonate diffuser



GJ2201

goccia
SOLE AGENCY

Jack Interchangeable Bulkheads

Interchangeable covers simply click on to the body
• Covers supplied separately • Black polycarbonate body
• Opal glass diffuser • Side or rear cable entry by means of gland or conduit

IP 65 | IK8 | Manufactured in Italy

JACK COVERS


GJ2263-SI


GJ2263-WH


GJ2263-BL


GJ2264-SI


GJ2264-BL


GJ2265-SI


GJ2265-BL


GJ2266-SI


GJ2266-BL


GJ2267-SI


GJ2267-BL

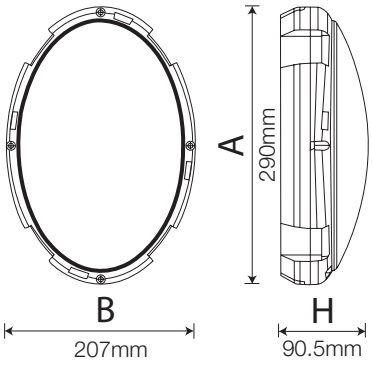

OVAL JACK BODY


GJ2241


GJ2143

E27
LED
SBL-8EWW
• 806 total lm
• 8 Watts • 3,000K • CRI>80 • 250° Beam

E27 | MAX. 75W | LED REPLACEABLE
GJ2241

INTEGRAL LED
• 1000 total lm
• 13 Watts • 4,000K • CRI>80

13 Watt
GJ2143
• Up to 50,000 hours life



GJ2241

goccia
SOLE AGENCY

Duralite Range

Duracast Composite Resin - the same texture and look of aluminium
• Lucca round style lantern • Rustic brown finish

Made in Italy

LUCCA RANGE



DUW377-BR



DUH377-BR



DUP377-BR

E27

LED
GLOBD-12EWW



• 1200 total lm
• Dimmable
• 12 Watts • 3,000K • CRI>80 • 300° Beam

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW377-BR
- Wall mount lantern
- 280mmD x 500mmH x 210mmW
- Mounting base 212mmH x 122mmW

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUH377-BR
- Ceiling mount with hanging lantern
- Adjustable height chain from 850mm (full chain) to 660mm overall, using only one chainlink
- 210mmW x 460mmH
- Ceiling rose 115mmØ

E27 | IP 44 | Pole Not Included | 60mmØ | MAX. 60W | LED REPLACEABLE

DUP377-BR
- Post mount lantern head only purchase post separately
- 210mmW x 500mmH
- Fits 60mmØ pole **BZ-POLE60**

DURALITE
Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Duralite Range

Duracast Composite Resin - the same texture and look of aluminium

Made in Italy

VITTOTRIA & TURIN



DUT8302-BL

DUW8302-BL

DUH8302-BL

E27

LED
VINTAGE-8E64

- 640 total lm
- 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW8302-BL
- Black
- Hexagon wall lantern
- 310mmD x 470mmH x 245mmW
- Mounting base 310mmH x 120mmW

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUT8302-BL
- Black
- Hexagon pedestal wall top mount Lantern
- 245mmW x 530mmH
- Hexagon mounting base 190mm point to point 165mm flat to flat

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUH8302-BL
- Black
- Hexagon hanging Lantern
- 240mmW x 450mmH
- Mounting base 115mmØ x 160mmH
- Adjustable up to 820mm height

AVELLINO



DUW577-BL

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW577-BL
- Black
- 330mmD x 520mmH x 175mmW
- Mounting base 195mmH x 113mmW

OTTO



DUW7016-BL

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW7016-BL
- Black
- 380mmH x 215mmD x 170mmW
- Mounting base 160mmH x 115mmW

DURALITE
Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Duralite Range

Duracast composite resin - the same texture and look of aluminium

Made in Italy

SANDWELL



DUW7010-BL



DUP7010-BL

E27

LED
GLS-9EWW



• 820 total lm
• 9 Watts • 3,000K • CRI>80 • 240° Beam

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW7010-BL
- Black
- Four sided wall lantern
- 230mmD x 320mmH x 175mmW
- Mounting base 145mmH x 113mmW

E27 | Pole Not Included | 60mmØ | IP 44 | MAX. 60W | LED REPLACEABLE

DUP7010-BL
- Black
- Four sided post mount lantern head only purchase post separately
- 320mmH x 175mmW
- Fits 60mmØ pole **BZ-POLE60**

CROYDON



DUW7030-BL



DUP7030-BL

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW7030-BL
- Black
- Hexagon wall lantern
- 230mmD x 360mmH x 180mmW
- Mounting base 145mmH x 113mmW

E27 | Pole Not Included | 60mmØ | IP 44 | MAX. 60W | LED REPLACEABLE

DUP7030-BL
- Black
- Hexagon post mount lantern head only, purchase post separately
- 330mmH x 180mmW
- Fits 60mmØ pole **BZ-POLE60**





FB1490
Polycarbonate mounting stand for **DUP7030**

DURALITE
Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Duralite Range

Duracast composite resin - the same texture and look of aluminium

Made in Italy

SANDWELL LARGE



DUW7025-BL

NEW



DUT7025-BL



DUP7025-BL

BZ-POLE60



FB5601
Pole Adapter

E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUW7025-BL

- Black
- Large Sandwell square wall lantern
- 210mmW x 400mmH x 265mmD
- Mounting base 210mmH x 123mmW

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUT7025-BL

- Black
- Large Sandwell square pedestal wall top mount lantern
- 210mmW x 470mmH
- Hexagon mounting base 190mm point to point, 165mm flat to flat

E27 | IP 44 | MAX. 60W | LED REPLACEABLE | Pole Not Included | 60mmØ

DUP7025-BL

- Black
- Large Sandwell square pedestal post top lantern only.
  Purchase post separately.
- 210mmW x 360mmH
- Hexagon mounting base 190mm point to point, 165mm flat to flat
- Fits 60mmØ pole **BZ-POLE60**

FB5601
Large to small Post adapter

- Bottom to fit 90mmØ pole external or 76mmØ internal
- Top accepts 60mmØ fitters

Example: FB5601



DURALITE
Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Outdoor Lanterns

High Grade lanterns



F3291-BL



FS7502-BL



F1642-SB

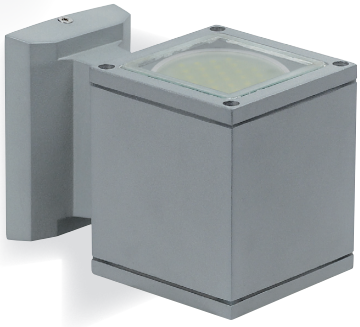

LGX53-S2-SG



LGX53-R2-SG

E27

LED

CANC-3EWW



- 300 total lm
- 3 Watts • 3,000K • CRI>80 • 270° Beam

E27 | IP 44 | MAX. 7W | LED REPLACEABLE

F3291-BL

Davenport wall lantern

- 310mmH x 170mmØ x 240mmD
- Mounting base 85mmØ
- Metal construction with glass lens

E27

LED

GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

FS7502-BL

Birk Wall Lantern

- Black 304 Stainless steel, with durable low maintenance E-coating
- 240mmH x 180mmØ x 225mmD
- Base 90mmØ

E27 | IP 23 | MAX. 60W | LED REPLACEABLE

F1642-SB

- Wall lantern hanging style
- 150sq x 310mmH
- Silver black with Lead light glass

GX53

LED

GX53-LED-WW

Included



- 98 total lm
- 2.3 Watts • 3,000K • CRI>75

GX53 | MAX. 9W | IP 63 | LED REPLACEABLE

LGX53-S2-SG

- Energy saver up and down light
- 90mmW x 120mmH x 156mmD
- Mounting base 75mmW x 105mmH
- Silver grey powder coated aluminium

LGX53-R2-SG

- Energy saver up and down light
- 116mmH x 135mmD x 90mmØ
- Mounting base 105mmW x 76mmH
- Silver grey powder coated aluminium

Duralite Range

Duracast composite resin - the same texture and look of aluminium
• Resistant to caustic substances • Fade resistant UV stabilized • Will not flake

CAMPANIA



DUW700-WH

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | IP 44 | MAX. 60W

LED REPLACEABLE | Made in Italy

DUW700-WH
• White
• Round wall mount lantern
• 280mmD x 500mmH x 210mmW
• Mounting base 125mmW x 210mmH

CASTRA

NEW



DUW8100-BL

DUW8100-WH

E27 | IP 54 | MAX. 60W

LED REPLACEABLE | Made in Italy

DUW8100
• Available in white or black
• Hexagon wall mount lantern, 2 different assembly options as shown
• 275mmD x 430mmH x 207mmW
• Mounting base 125mmW x 210mmH

DURALITE Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Exterior Lanterns & Globes

Traditional style outdoor lights

• Non-Metalic, suits seaside use • No discolouring • No rusting • No paint flaking • UV resistant acrylic lenses

THERMOPLASTIC LANTERNS

Manufactured in U.S.A.



F7060-SI



F259L-BL



Batten Ceiling Mount

F1060-SI

E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | 76mmØ | Pole Not Included | LED REPLACEABLE

F259L-BL

- Hexagon post top lantern
- 220mmW x 360mmH
- Mount onto 76mmØ pole **BZ-POLE** 1 or 2

E27 | MAX. 60W | IP 44 | LED REPLACEABLE

F7060

- 205mmW x 370mmH

B22

LED
GLSD-6BWW



• 450 total lm • Dimmable
• 6 Watts • 3,000K • CRI>81 • 270° Beam

B22 | MAX. 60W | IP 44 | LED REPLACEABLE

F1060

- Mounts onto **B22** batten holder
- 205mmW x 290mmH

Duralite Range

High grade aluminium casting
• Polyester paint finish • Stainless steel screws • Polycarbonate diffuser

Made in Italy

ZELIG



DUAW9005-GM

ARNO



DUAW9002-BL

E27

LED
VINTAGE-8E64



• 640 total lm
• 8 Watts • 2,700K • CRI>90 • 360° Beam

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUAW9005-GM
- Gun metal paint finish
- Round louvered wall lantern
- 450mmH x 370mmD x 330mmW
- Mounting base 150mmH x 115mmW

E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUAW9002-BL
- Black paint finish
- Round wall lantern
- 470mmH x 300mmD x 250mmW
- Mounting base 190mmH x 90mmW

German Glass Outdoor Lanterns

Hand fabricated glass lantern with resin wall bracket
• These exquisitely crafted european cast glass lanterns will be your first choice for when you want lighting that is distinctively unique

euro GLAS



F3356-BL



F3398-BL

Manufactured in Germany

E27 | MAX. 60W | LED REPLACEABLE

F3356-BL
- 260mmH x 260mmØ
- Plastic base
- A futuristic exclamation of the classic lantern

E27 | MAX. 60W | LED REPLACEABLE

F3398 –BL
- 320mmH x 240mmW x 210mmD
- Plastic base
- Architectural undertones are present through its angular juxtapositions, aligning itself with todays contemporary structures

Tube Light Series

Replaceable lamp allows different beam angle and colour selection
• No control gear required

SOLID STAINLESS STEEL



LG202-SS



LG201-SS



LG203-SS



LG220-SS

PAINTED DIE CAST ALUMINIUM



LG201-BL



LG203-BL

GU10

LED
GU10-HPLED-WH



• 520 total lm
• 6 Watts • 3,000K • CRI>80 • 38° Beam

HALOGEN
GU10-35-A



• 350 total lm • Dimmable
• 35 Watts • 3,000K • CRI>100 • 36° Beam

GU 10 | 2x | MAX. 50W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

LG201-SS
• Stainless steel
• 280mmH x 75mmØ
• Mounting base 75mmH x 45mmW
• Up and downlighter

GU 10 | 2x | MAX. 35W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

LG202-SS
• 162mmH x 60mmØ
• Mounting base 85mmØ
• Comes in stainless Steel
• Up and downlighter

GU 10 | MAX. 35W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

LG203
• 110mmH x 60mmØ
• Mounting base100mmH x 40mmW
• Comes in stainless steel
• Up or downlighter

GU 10 | MAX. 35W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

LG220-SS
• Adjustable spotlight
• Head 90mmL x 63mmØ
• Mounting base 95mmØ
• Stainless steel

GU 10 | 2x | MAX. 50W | IP 54 | LED REPLACEABLE

LG201-BL
• Painted die cast aluminium
• 280mmH x 135mmD
• 75mmØ head
• Mounting base 75mmH x 45mmW
• Mains voltage - No transformer required
• Up and downlighter

GU 10 | MAX. 35W | IP 54 | LED REPLACEABLE

LG203-BL
• Painted die cast aluminium
• 100mmH x 120mmD
• 65mmØ head
• Mounting base 90mmØ
• Mains voltage - No transformer required
• Up or downlighter

Aluminium LED Wall Lights

For exterior or interior use
• Made from die cast aluminium • Charcoal colour paint finish



INTEGRAL LED
• 210 total lm • 40° Beam
• 3 Watts • 3,000K • CRI>85

IP 65 | LIGHT CUT OFF

LX162-CC
• Single beam LED wall light
• 131mmH x 76mmW x 83mmD
• ULOR = 0%



INTEGRAL LED
• 480 total lm • 40° Beam
• 2 x 3 Watts • 3,000K • CRI>85

IP 65

LX164-CC
• Double beam LED wall light
• 131mmH x 76mmW x 100mmD



INTEGRAL LED
• 230 total lm • 70° Beam
• 3 Watts • 3,000K • CRI>85

IP 65 | LIGHT CUT OFF

LX163-CC
• Single beam pathway or stair lighting
• 97mmH x 91mmW x 61mmD
• ULOR = 0%

Stainless Outdoor Lighting

304 stainless steel bollards and wall lights



FSDS52



FSS52



FS2168



FS4997



LG8072-SS

"Refer to Material selection and Maintenance" Warranty not valid for corrosive environments

E27

LED
GLSW-8EWW
- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam



E27 | IP 23 | MAX. 60W | LED REPLACEABLE

FSDS52 Night light wall light
- 350mmH x 80mmØ, base 110mmØ
- The photocell allows automatic operation of light from dusk to dawn
- 304 Stainless steel
- Ideal in covered entrances or under eaves

E27 | IP 23 | MAX. 60W | LED REPLACEABLE

FSS52 Sensor Wall Light
- 350mmH x 80mmØ, base 110mmØ
- Non-adjustable PIR motion sensor, On for 40 sec after last detection of movement
- 304 Stainless steel
- Ideal in covered entrances or under eaves

E27 | IP 23 | MAX. 60W | LED REPLACEABLE

FS2168
- 300mmH x 200mmØ
- Mounting base 130mmØ
- Glass globe 200mmØ
- 304 Stainless steel

GU10

LED
GU10-HPLED-WH
- 520 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam



E27 | MAX. 35W | GU 10 | MAX. 15W | IP 44 | 304 Stainless Steel | LED REPLACEABLE

FS4997
- 340mmH x 62mmØ
- Down light uses GU10 bulb
- Base 104mmH x 43mmW

G9

LED
G9-3WLED-WW
Included
- 200 total lm
- 3 Watts • 3,000K • CRI>80 • 360° Beam



G9 | IP 44 | MAX. 40W | LED REPLACEABLE

LG8072-SS
- 260mmH x 130mmW
- Mounting base 95mmØ
- Clear glass lens

LED Wall & Bollard Lights

Bright LED outdoor lights 10 Watt = 100 Watt lighting effect



LH5101-BL

INTEGRAL LED
- 630 total lm
- 10 Watts • 3,000K • CRI>80

IP 44

LH5101-BL
- 10 Watt CREE brand LED
- Made from die-cast aluminium with polycarbonate diffuser
- 222mmH x 144mmW x 103mmD
- Mounting base 117mmW x 57mmH

SINGLE BEAM



ULOR <5% Compliant

LH4901-BL

INTEGRAL LED
- 700 total lm • 110° Beam
- 10 Watts • 3,000K • CRI>80

IP 44 LIGHT CUT OFF

LH4901-BL
- 10 Watt CREE brand LED
- Made from die-cast aluminium with polycarbonate diffuser
- 141mmH x 144mmW x 103mmD
- Mounting base 117mmW x 57mmH
- ULOR = 0.05%

DOUBLE BEAM



LH5001-BL

INTEGRAL LED
- 1400 total lm • 110° Beam
- 2 x 10 Watts • 3,000K • CRI>80

IP 44

LH5001-BL
- 2 x 10 Watt CREE brand LED
- Made from die-cast aluminium with polycarbonate diffuser
- 211mmH x 144mmW x 103mmD
- Mounting base 117mmW x 57mmH

Stainless Steel Lamps & Bollards

Brushed stainless steel, polycarbonate lens



FS2103



FS124





F1051-SS



F1051-BL

LG2182-SS

E27

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

LED
SBL-8EWW



- 806 total lm
- 8 Watts • 3,000K • CRI>80 • 250° Beam

E27 | IP 23 | MAX. 60W | LED REPLACEABLE

FS2103

- 355mmH x 210mmØ
- Mounting base 130mmØ
- Polycarbonate lens
- 304 stainless steel

E27 | IP 23 | MAX. 40W | LED REPLACEABLE

FS124

- 335mmH x 90mmØ
- Mounting base 95mmØ
- 304 stainless steel

E27 | IP 65 | MAX. 11W | LED REPLACEABLE

IK02 | Made in Italy

F1051
Cilindro Bollard

- Available in 316 stainless steel or 304 stainless with black texture paint finish
- PMMA acrylic diffuser
- 590mmH x 80mmØ
- 95mmØ mounting base

GU10

LED
GU10-HPLED-WH



- 520 total lm
- 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 | MAX. 35W | IP 54 | 304 Stainless Steel | LED REPLACEABLE

LG2182-SS

- Double spotlight on post
- 800mmH
- Stainless steel
- Base 120mmØ

"Refer to Material selection and Maintenance"

Bollards and Sensor Lanterns

LED replacable aluminium or stainless steel options

COEN



LH5980-CC



LHS5870-CC

E27

LED

GLSD-8EWW



• 840 total lm • Dimmable
• 8 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | IP 44

LH5980-CC
Coen Bollard
- Die cast aluminium with polycarbonate lens
- 450mmH x 110mmØ
- 110mmØ mounting base

E27 | MAX. 60W | IP 44

LHS5870-CC
Coen Sensor Lantern
- Die cast aluminium with polycarbonate lens
- 160mmH x 110mmW x 135mmD
- 45mmH x 65mmW mounting base

ABEL



LGS7008-BL

GU10

LED

GU10-HPLED-WH



• 470 total lm
• 6 Watts • 3,000K • CRI>80 • 38° Beam

GU 10 | 2x | MAX. 3W | IP 44

LGS7008-BL
Able Sensor Light
- Black painted stainless steel
- Glass lenses
- 70mmW x 210mmH x 110mmD
- 70mmW x 150mmH mounting base

LOUVRED BOLLARD



C4025L-BL
+
BZ-POLE

E27

LED

GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 60W | IP 54 | Pole Not Included | 76mmØ

C4025L
- Aluminium with glass diffuser
- 150mmW x 200mmH
- Mount onto either
  BZ POLE-1, BZ POLE-2

"Refer to Material selection and Maintenance"

Outdoor Lighting Mounting Accessories

Allows vertical mounting on weather boards
- To fit on 3° up to 15° angled weather boards

Manufactured in New Zealand

© COPYRIGHT

WEATHER BOARD PACKERS



WBP145 **WBP110** **WBF145** **WBF110**

(Bottom stacking packers) (Top packers)

WBP110 & WBF110
- 110mmW x 105mmH x 7mm depth
- 3 degrees

WBP145 & WBF145
- 145mm x 145mm x 9mm depth
- 3 degrees

Weather board packers to mount Up/ Down tube lights, lanterns and bulkheads on a vertical surface, simply click and arrange together multiple packers to build a satisfactory vertical mounting surface.

- Packers have a knock out hole for wiring
- Easy to trim
- Can be painted to match your weather boards

EXAMPLES

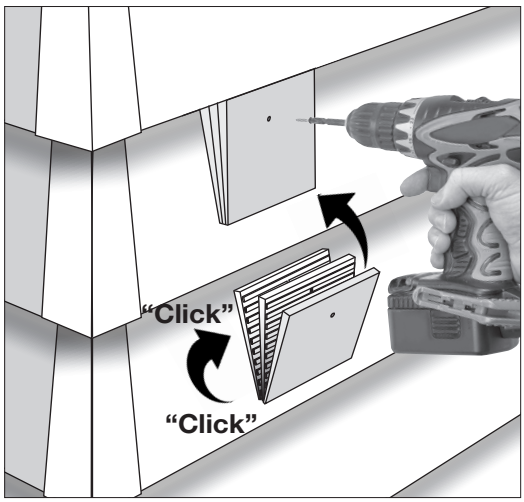



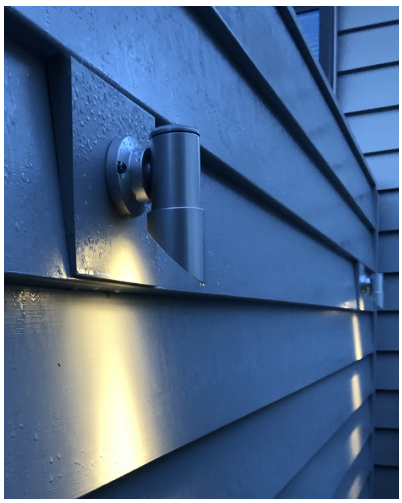

Vertical mounting



Installation



Horizontal mount

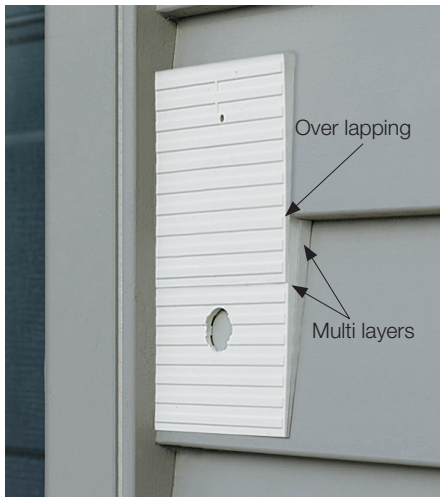

Vertical over lapping

LED Wall and Bollard Lights

Contemporary die cast aluminium exterior lights



LH3010-CC



LH2850-CC



LH7950-CC



LH300-CC



LHG1580-BL

INTEGRAL LED
• 660 total lm • 50° Beam
• 2 x 6 Watts • 3,000K • CRI>80

LH3010-CC
Enzo up and down wall light

IP 65

- 2 x 6 Watt integral
- 200mmH x 105mmW x 92mmD
- Die cast aluminium with glass lens

INTEGRAL LED
• 1780 total lm • 25° Beam
• 2 x 6 Watts • 3,000K • CRI>80

LH2850-CC
Harlow up and down wall light

IP 65

- 2 x 6 Watt integral CREE LED
- 223mmH x 90mmW x 125mmD
- Mounting base 95mmH 75mmW
- Die cast aluminium with glass lens

INTEGRAL LED
• 530 total lm • 210° Beam
• 8 Watts • 3,000K • CRI>80

LH7950-CC
Geo bollard light

IP 54 LIGHT CUT OFF

- 8 Watt integral CREE LED
- 800mmH x 108mmØ
- Mounting base 120mmØ
- Die cast aluminium
- ULOR = 0%

INTEGRAL LED
• 660 total lm • 90° Beam
• 12 Watts • 3,000K • CRI>80

LH300-CC
Norvin bollard light

IP 65 LIGHT CUT OFF

- 12 Watt integral CREE LED
- 300mmH x 110mmØ
- Mounting base 158mmØ x 20mmH
- Supplied assembled with 200mmL cord
- Die cast aluminium
- ULOR = 0%

INTEGRAL LED
• 525 total lm
• 15 Watts • 3,K, 4.5K, 5.7K • CRI>80

LHG1580-BL
Parker bollard light

IP 65

- 15 Watt integral LED
- 800mmH x 162mmØ
- Mounting base 162mmØ
- IK08 impact rating
- Aluminium body-polycarbonate lens
- ULOR = 17.4%

Duralite Range

Duracast composite resin
• Resistant to caustic substances • Fade resistant UV stabilised
• Will not flake or discolour • Vandal resistant material

20 Years GUARANTEED ANTI-CORROSION

Made in Italy

ECLIPSE BOLLARD



DUB80-BL DUB80-SI

INTEGRAL LED
• 2800 total lm
• 22 Watts • 4,000K • CRI>80

IP 55

DUB80
• 22 Watt / integral LED “LITE ON” USA brand
• Great downwards illumination for walk way areas
• 170mmØ x 780mmH
• 3,000 lumens
• 3 x 8mmØ mounting holes in base plate

ECLIPSE BOLLARD WITH SENSOR

SENSOR Model



DUBMS80-BL DUBMS80-SI

INTEGRAL LED
• 2800 total lm
• 22 Watts • 4,000K • CRI>80

IP 55

DUBMS80
• Motion sensor Integral in body. Sensitivity, distance and lux settings adjustable to suit your situation
• 22 Watt / integral LED “LITE ON” USA brand
• Great downwards illumination for walk way areas
• 170mmØ x 780mmH
• 3,000 lumens
• 3 x 8mmØ mounting holes in base plate

180° HALF REFLECTOR



DUB-REF-BL



DUB-REF-SI

ASSEMBLED EXAMPLE



DUB80 or DUBMS80 + DUB-REF

DUB-REF
• 180° half light reflector for eclipse bollards
• Assembly required

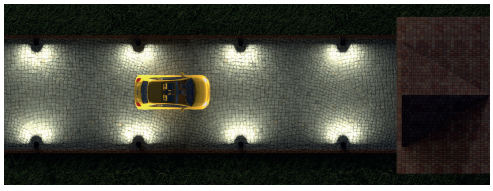



DURALITE Hi-Tech Lighting Features

Durable Bollard Lights

Strong, weatherproof - won't rust, chip or flake



F5301L-BL
+ BZ-POLE1



DUF80-BL

20 Years GUARANTEED ANTI-CORROSION

DURALITE Hi-Tech Lighting Features



F1062
+ BZ-POLE60



F1016
+ BZ-POLE60

ULOR <5% Compliant

E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

E27 | MAX. 60W | Pole Not Included | Made in USA

76mmØ | IP 53 | LED REPLACEABLE

F5301

- Mount onto 76mmØ pole **BZ-POLE** 1 or 2
- Comes in black or white
- 260mmH 255mmØ
- Aust des app no. 836-1999
- Polycarbonate

E27 | MAX. 100W | IP 44 | LED REPLACEABLE

Made in Italy

DUF80-BL
Baltimore Bollard

- Round Duralite bollard
- Black
- Made from Hi-tech composite resin
- Vandal resistant
- 170mmØ x 780mmH
- Base has 3 x 8mmØ holes on 118mmØ pitch circle

INTEGRAL LED

- 1400 total lm
- 15 Watts • 3,000K • CRI>80

IP 65 | IK05 | 60mmØ | Pole Not Included

Made in Italy | LIGHT CUT OFF

F1062
Giro Lantern Head

- 15 Watt integral LED
- Die-cast aluminium with black paint finish
- PMMA acrylic diffuser
- 175mmØ x 94mmH
- ULOR = 0%

E27 | MAX. 20W | Pole Not Included | IP 54 | 60mmØ | LED REPLACEABLE

F1016
Arco Lantern Head

- Available in Charcoal
- Shown on 60mmØ pole
- Reinforced thermoplastic with acrylic diffuser
- 311mmL x 230mmW x 195mmH
- Mount onto 60mmØ pole or bracket
- ULOR = 7.16%

Duralite Range

Duracast composite resin

Made in Italy

CHICAGO LIGHTS



DUW4000-SI



DU4510-BZ



Fixing into the ground



Fixing onto concrete (or masonary elements)

TUSON SPOTLIGHTS



DUW2000-SI



DU5710-SI

MESA LIGHTS



DUT6002-BZ



DU6002-BZ

20 Years GUARANTEED ANTI-CORROSION

DURALITE Hi-Tech Lighting Features

E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | IP 44 | MAX. 40W | LED REPLACEABLE

DUW4000
- Available in silver
- 230mmD x 220mmW x 225mmH
- Mounting base 88mmØ

E27 | IP 44 | MAX. 40W | LED REPLACEABLE

DU4510
- Available in bronze
- 155mmW x 520mmH
- Mounting base 120mmØ
- Includes pole with inground mounting kit or can be mounted directly onto concrete or decking

R80 | IP 44 | MAX. 50W
E27 | PAR 20 | LED REPLACEABLE

DUW2000
- Available in bronze or silver
- 230mmD x 240mmW
- Mounting base 85mmØ
- Spot head = 100mmØ

R80 | IP 44 | MAX. 50W
E27 | PAR 20 | LED REPLACEABLE

DU5710
- Available in bronze or silver
- 770mmH
- Mounting base 120mmØ
- Spot head = 100mmØ
- Includes pole with inground mounting kit or can be mounted directly onto to concrete or decking
- If post supplied is insufficient height, **BZ-Pole1** / **BZ-Pole2** may be used

E27 | IP 44 | MAX. 40W | LED REPLACEABLE

DUT6002-BZ
- Bronze Wall top lantern
- 160mmW x 270mmH
- Mounting base 100mmØ

E27 | IP 44 | MAX. 40W | LED REPLACEABLE

DU6002-BZ
- Bronze
- 160mmW x 580mmH
- Mounting base 120mmØ
- Includes pole with inground mounting kit or can be mounted directly onto to concrete or decking
- If post supplied is insufficient height, **BZ-Pole1** / **BZ-Pole2** many be used

Freelite™ Solar Bollards

Professional quality with intelligent energy management systems

IP 65

KEA NIGHT SKY AND WILDLIFE FRIENDLY





Freelite™ Solar LED
• 265 total lm • Autonomy 2-3 days
• 2,800K • CRI>80 • 77° Beam



PVB800-BL
KEA Asymetric bollard
- Aysmetric light output
- Built-in microwave sensor
- 275mmØ x 900mmH
- Die cast aluminium with UV stabilised polycarbonate
- IK10 impact resistance
- ULOR = 0.77%

PVB800-BL

Freelite™ Solar LED
• 270 total lm • Autonomy 2-3 days
• 2,800K • CRI>80 • 130° Beam



PVB850-BL
KEA Symetric bollard
- Symetric light output
- Built-in microwave sensor
- 275mmØ x 900mmH
- Die cast aluminium with UV stabilised polycarbonate
- IK10 impact resistance
- ULOR = 1.04%

PVB850-BL

TUI BOLLARD



VITA BOLLARD



Freelite™ Solar LED
• 220 total lm • Autonomy 2-3 days
• 2,800K • CRI>80 • 145° Beam



PVB900-BL
TUI bollard
- 275mmØ, 900mmH
- Aluminium and UV stabilised polycarbonate
- Built-in microwave sensor
- ULOR = 4.65%
- IK10 ++ High vandal resistance for public areas

PVB900-BL

Freelite™ Solar LED
• 220 total lm • Autonomy 2-3 days
• CCT Changeable • CRI>80 • 190° Beam



PVB700-BL
VITA bollard
- Colour changeable 3,000K, 4,000K and 6,000K
- 260mmØ, 900mmH
- Made from aluminium and UV stabilised polycarbonate
- ULOR = 13.4%
- IK10 impact resistant

PVB700-BL

Freelite™ Solar Lights

Lens and light distribution designed for highlighting gardens and foliage IP 65

FERN GARDEN BOLLARD



FERN PEDESTAL LIGHT



Freelite™ Solar LED
• 200 total lm • Autonomy 2-3 days
• 3,000K • CRI>80 • 120° Beam

PVB300-BL
Fern Garden bollard
- 260mmØ, Optional height 700mm or 1160mm
- 114mmØ mounting base (removable)
- Made from aluminium and UV stabilised polycarbonate
- 460mmL extension post available purchase separately PV300-POST

PVT300-BL
Fern Pedestal light
- 260mmØ, 278mmH
- 114mmØ mounting base
- Made from aluminium and UV stabilised polycarbonate



Lights from dusk till dawn • Simple "Install and forget" solution IP 65

CALI RANGE SOLAR LIGHTS







Freelite™ SolarLED
• 325 total lm • Autonomy 2-3 days
• 3,000K • CRI>80 • 150° Beam

Cali Solar lights
- Aluminium with UV stabilised polycarbonate
- Bollard and wall light have PIR sensor with 3 metre 160° range



Outdoor Lighting

Bollard lights for garden and path lighting

EDEN LANTERN TOP



INTEGRAL LED
• 1850 total lm
• 20 Watts • 3,000K • CRI>80

Manufactured in New Zealand

Pole Not Included | 76mmØ | IP 54

BZL-104L-BL
Eden lantern
New Zealand's most popular and durable landscape fitting
- Shatterproof diffuser
- 425mmØ x 225mmH
- Comes in black
- 20 Watt LED model
- Mount onto either **BZ POLE-1**, **BZ POLE-2 or S600-BL**



L296

L296
- LED module available separately
- LED heatsink and wires.

FUNGO LANTERN TOP



E27

LED
GLSW-8EWW



• 1055 total lm
• 8 Watts • 3,000K • CRI>80 • 270° Beam

E27 | MAX. 10W | Pole Not Included | IP 65 | 60mmØ | LED REPLACEABLE

F1081
Fungo Lantern Head
- Available in black
- Shown on 60mmØ pole
- Polycarbonate shade with acrylic diffuser
- 325mmØ x 200mmW
- Mount onto 60mmØ pole or bracket
- ULOR = 14.5%

Classic Outdoor Lanterns

High quality Duracast materials

Made in Italy



E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

LED
GLSW-8EWW



- 1055 total lm
- 8 Watts • 3,000K • CRI>80 • 270° Beam

3 X E27 | IP 44 | 60 Watt | LED REPLACEABLE

DU83023-BL

- 3 Light post lantern
- Hexagon lanterns
- 2350mmH x 580mmW
- Base 240mmW
- Made from durable Duracast composite resin material
- Inside reinforced with galvanised post

E27 | IP 44 | MAX. 100W | LED REPLACEABLE

DU10730-BL

- Black
- Modica globe and post
- 300mmØ globe
- 2250mmH
- Base 240mmW
- Made from durable Duracast composite resin material
- Inside reinforced with galvanised post

60mmØ

DU324
Decorative post with base

- Black
- 2100mmH
- Base 240mmW
- Made from durable Duracast composite resin material
- Inside reinforced with galvanised metal post
- Purchase globe or lantern separately

DURALITE Hi-Tech Lighting Features

20 Years GUARANTEED ANTI-CORROSION

Outdoor Lanterns

Traditional style high quality outdoor lanterns

DEREX



E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

LED
GLOBD-12EWW



- 1200 total lm
- Dimmable
- 12 Watts • 3,000K • CRI>80 • 300° Beam

E27 | IP 55 | MAX. 100W

LED REPLACEABLE | Made in Italy

DUW5028-BL
Derex Wall Lantern

- Black
- Large square wall lantern
- Made from Duracast composite resin
- 860mmH x 750mmD x 330mmW
- Mounting base 190mmØ

Duralite composite resin

- Resistant to caustic substances
- Resin resistant in climates -50 to 80+ degrees
- Fade resistant UV stabilised
- Will not flake
- Vandal resistant material

HYTHE



INTEGRAL LED

- 545 total lm
- 8 Watts • 3,000K • CRI>80

IP 54

F240-GR
Hythe Wall Lantern

- Graphite
- Made from die cast aluminium with opal polycarbonate diffuser
- 240mmW x 262mmH x 297mmD

Freelite™ Solar large Area Light

Ideal for large driveways, carparks, courtyards etc

CALI



Freelite™ Solar LED
• 1700 total lm • Autonomy 2 days
• 3,000K • CRI>80 • 150° Beam

76mmØ

IP 65

PVP200-BL
Cali Solar powered large area lantern with microwave sensor

- Microwave sensor 8 metre range, 360° lights up full output when motion detected
- Battery autonomy 2 days
- Die-cast aluminium construction and UV stabilised polycarbonate
- 580mmH x 530mmØ
- Purchase pole separately



T376 Pole Galvanised Steel Powder Coated black (3000mmL)
Optional mounting cage **CAGE376** available



PVP200-BL

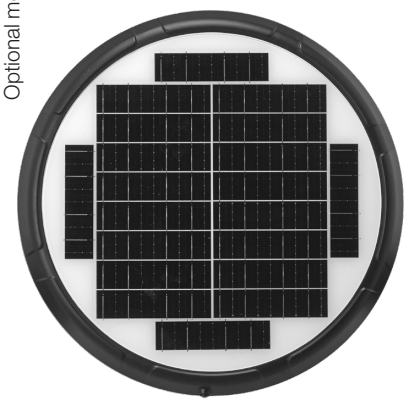

Top view

Freelite™ Solar Street & Carpark

Night sky friendly, ideal for street, carparks, sports grounds, playgrounds etc

JOVI

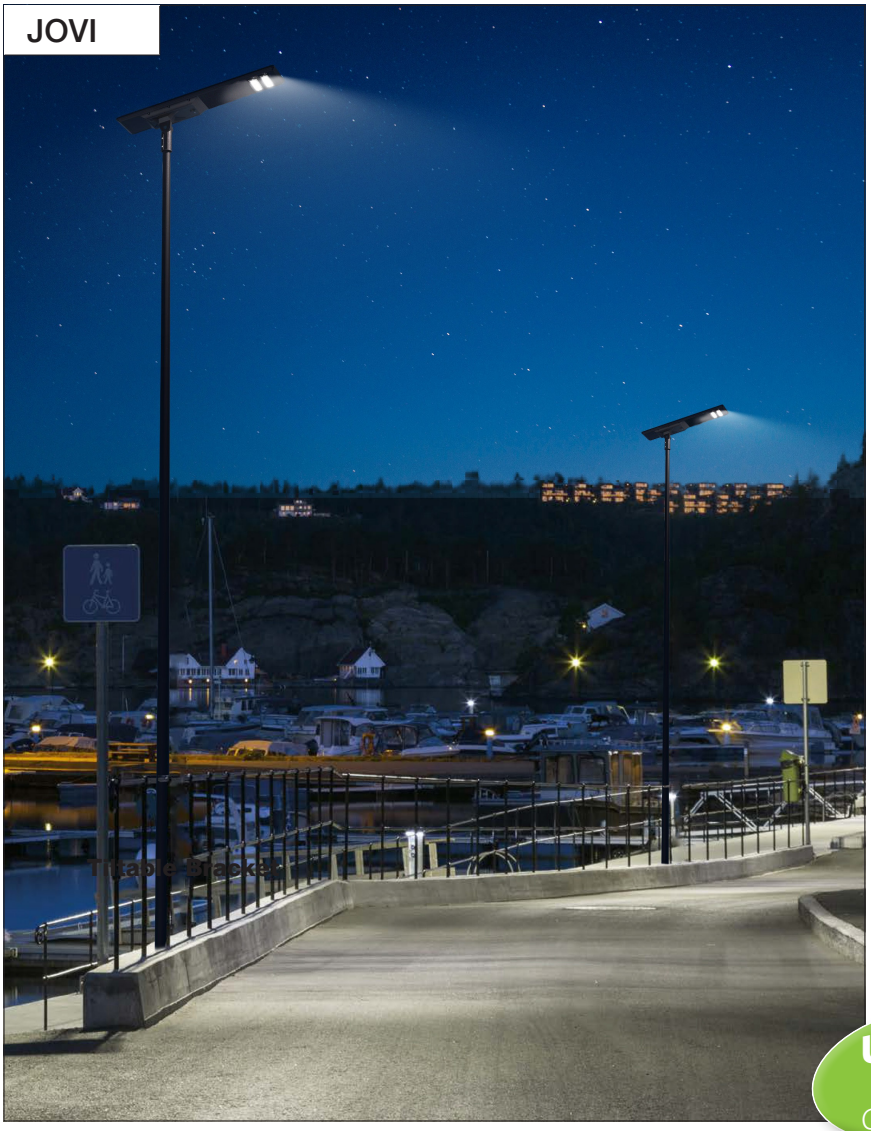

Freelite™ SolarLED
• 9800 total lm • Autonomy 2-4 days
• 2,800K • CRI>80 • 140° Beam

76mmØ | IP 65

PVP600-CC
Jovi Solar powered street and carpark light head with microwave sensor

- Large area photovoltaic panel and large battery capacity built into the light head
- Energy management system which controls dusk to dawn switching, charging and optimal operating modes
- Die cast aluminium construction
- Lamp head 1100mmL x 420mmW x 350mmH
- Microwave sensor range up to 8 metres, 360°
- Battery Autonomy: 2 days or 3-4 days in sensor mode
- Purchase pole separately
- ULOR = 0.31%



PVP600-CC

ULOR <5% Compliant

Horizontal overreach

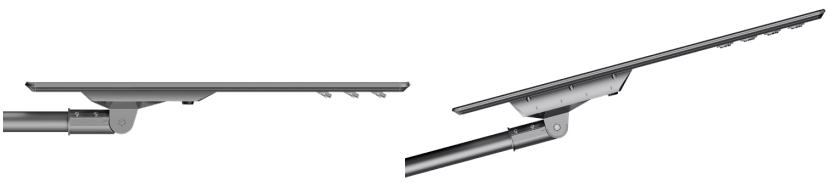



LED panels swivel

For optimal solar panel placement and light direction.

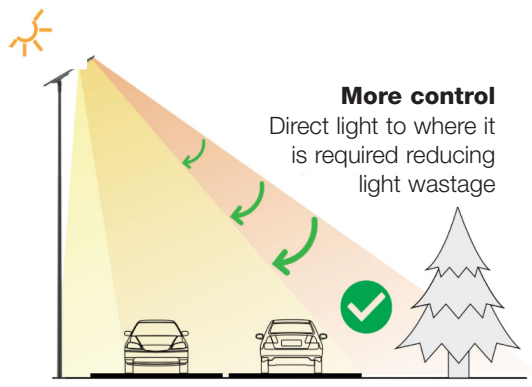

Performance of JOVI Solar street lights

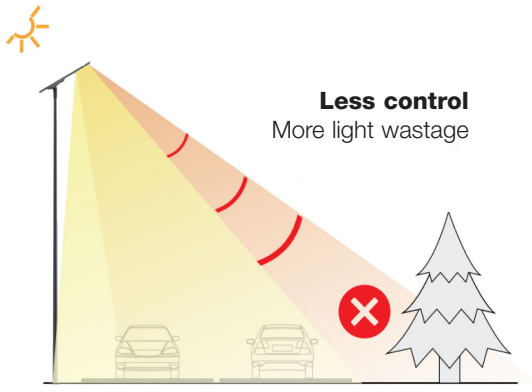

Performance of other Solar street lights

Arc Large Area Lantern

One head style available in four different light distribution options

LIGHT CUT OFF · IP 65 · Made in Italy · IK06 · 60mmØ

• Pole or wall mount 60mmØ fitter, purchase separately • Integral Control gear
• 10K surge protection • Charcoal finish • 482mmD x 342mmH x 215mmW • ULOR = 0%

ARC LANTERN

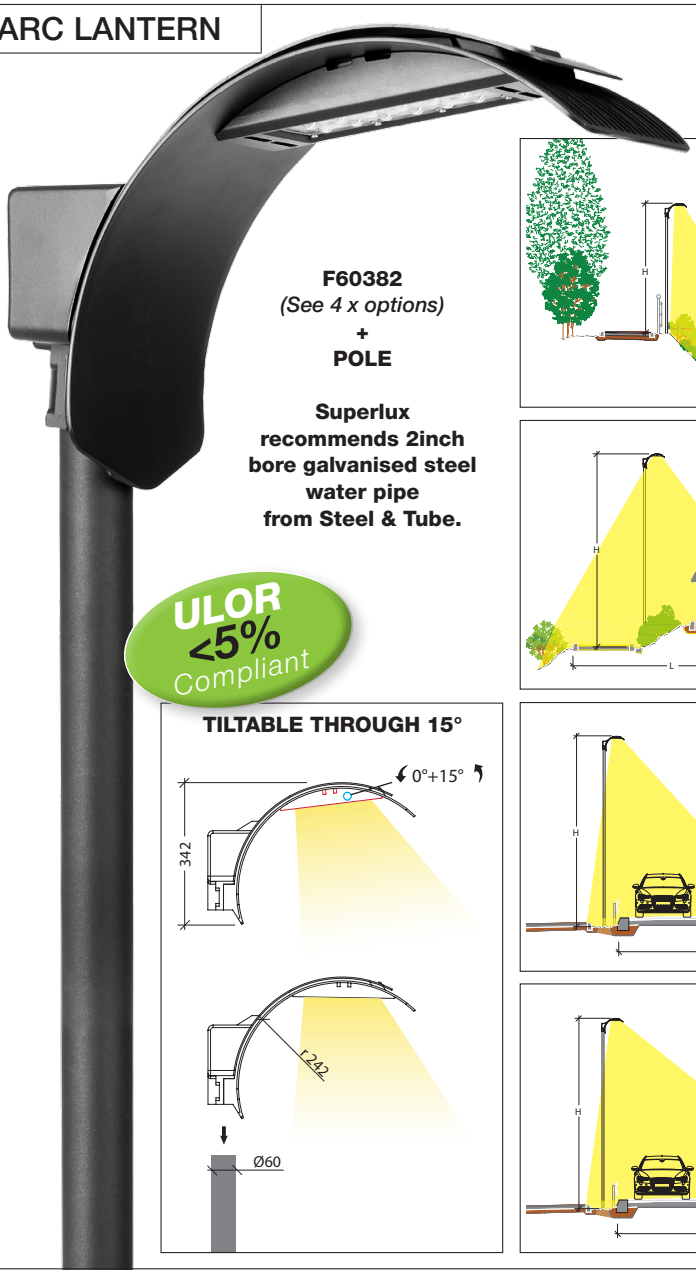

F60382
(See 4 x options)
+
POLE

Superlux recommends 2inch bore galvanised steel water pipe from Steel & Tube.

ULOR <5% Compliant

TILTABLE THROUGH 15°

F60382-PED

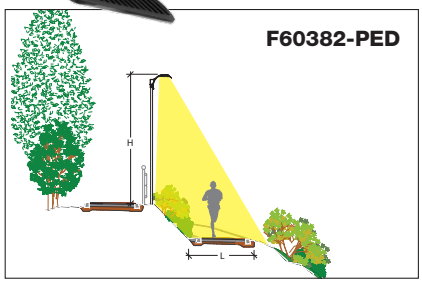

F60382-SYM

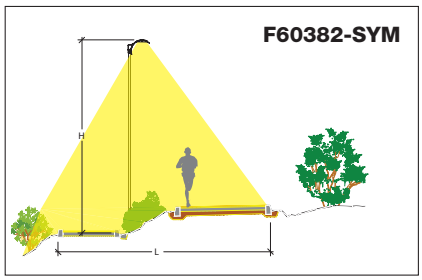

F60382-R5

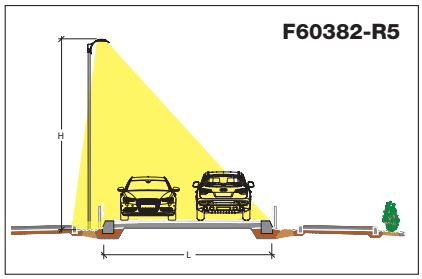

F60382-R8

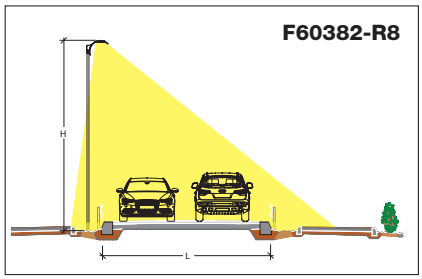

INTEGRAL LED
• 6687 total lm
• 55 Watts • 4,000K • CRI>80

F60382-PED
Pedestrian Lantern Head

INTEGRAL LED
• 6017 total lm
• 55 Watts • 4,000K • CRI>80

F60382-SYM
Symetrical Lantern Head

INTEGRAL LED
• 6553 total lm
• 55 Watts • 4,000K • CRI>80

F60382-R5
Road 5 metre optics Lantern Head

INTEGRAL LED
• 6687 total lm
• 55 Watts • 4,000K • CRI>80

F60382-R8
Road 8 metre optics Lantern Head

WALL MOUNTING BRACKET



FB1060



FB60382
+
FB1060

FB1060
• Wall mounting bracket for:
F60382-PED
F60382-SYM
F60382-R5
F60382-R8

Large Area Lanterns

Ideal for large driveways and carparks

Made in Italy

CERCHIO





F1068
+
FB3003

ULOR <5% Compliant

F1068
+
BZ-POLE60



INTEGRAL LED
- 5603 total lm
- 55 Watts • 4,000K • CRI>80

IP 65 | IK08 | 60mmØ | LIGHT CUT OFF

F1068
Cerchio Lantern Head
- 400mmØ x 125mmH
- Die cast aluminium with textured charcoal powder coated finish
- Purchase post **BZ-POLE60** or mounting arm **FB3003** separately
- Can use with **FB5601** to fit 76mmØ or 90mmØ poles
- ULOR = 0%

FB3003
- Metal mounting arm only
- Wall or mount onto post
- 555mmL
- Base mounting 170mmH x 50mmW



FB3003: *Examples of mounting configurations*

GIRARE



NEW LED



Pre-wired quick installation



F1600
+
BZ-POLE60

F1600
+
FB3003

INTEGRAL LED
- 3677 total lm
- 28 Watts • 4,000K • CRI>80

IP 65 | IK08 | 60mmØ

F1600
Girare Lantern Head
- 515mmØ x 505mmH
- Reinforced black textured thermoplastic cover with PMMA acrylic diffuser
- Purchase post **BZ-POLE60** or mounting arm **FB3003** separately
- Can use with **FB5601** to fit 76mmØ or 90mmØ poles



Acrylic Globes with E27 fitters

Mix & match - 14 globe types, 7 mounting options

Made in Italy









E27

LED
GLSD-8EWW



- 840 total lm • Dimmable
- 8 Watts • 3,000K • CRI>80 • 240° Beam

LED
SBL-18EDL



- 1870 total lm
- 18 Watts • 6,000K • CRI>80 • 160° Beam

LED
SBL-28EDL



- 2600 total lm
- 28 Watts • 6,000K • CRI>80 • 160° Beam

- Globe and E27 fitter assembly
- Globe made from PMMA acrylic polycarbonate base
- Can be directly mounted onto columns and walls

E27 | MAX. 11W | IP 44 | 60mmØ | LED REPLACEABLE

F6000
- Available in opal or smoke
- 200mmØ, base 100mmØ

E27 | MAX. 20W | IP 44 | 60mmØ | LED REPLACEABLE

F6001
- Available in opal or smoke
- 250mmØ, base 119mmØ

E27 | MAX. 21W | IP 44 | 60mmØ | LED REPLACEABLE

F6002
- Available in opal or smoke
- 300mmØ, twist lock acrylic globe
- Mounting base 15mm x 139mmØ

E27 | MAX. 28W | IP 44 | 60mmØ | LED REPLACEABLE

F6003
- Available in opal or smoke
- 400mmØ, twist lock acrylic globe
- Mounting base 15mm x 178mmØ

E27 | MAX. 35W | IP 44 | 60mmØ | LED REPLACEABLE

F6004
- Available in opal or smoke
- 500mmØ, twist lock acrylic globe
- Mounting base 23mm x 225mmØ

Acrylic Globes & Optional Mounts

Mix & match - 14 globes, 7 mounting options

Made in Italy

SHOWN ON POLE



F6000-SM + BZ-POLE60



F6001-WH + BZ-POLE60



F6002-SM + BZ-POLE60

BZ-POLE60-2BL
BZ-POLE60-3BL
- 2 metres or 3 metres, 60mmØ
- Made from PVC plastic with galvanised steel inner

SHOWN ON PEDESTAL



F6000-WH + FB1490



F6001-SM + FB1490



F6002-WH + FB1490

FB1490
- Available in black
- Polycarbonate mounting base. No post required when using this base 120mmØ base, top diameter 60mmØ,118mmH
- Globe sold separately in 200mm, 250mm, 300mm, 400mmØ or 500mmØ

FB6933
- 45 degree angle bracket
- Available in black
- Durable polycarbonate
- 140mmL
- 58mmW x 108mmH mounting base
- Globe sold separately in 200mm, 250mmØ
- **Note:** If mounting with bracket facing down use silicon sealant

ANGLE WALL BRACKET



F6001-WH + FB6933



F6000-SM + FB6933

HANGING ADAPTER



NEW

F587 + F6001-WH

F587
Hanging Adapter
- Purchase globes and cable separately
- Fits globes F6000, F6001, F6002, F6003, F6004

Wall bracket to post adapter examples

Mount single or double wall brackets

60mmØ

60mm POLES & ACCESSORIES

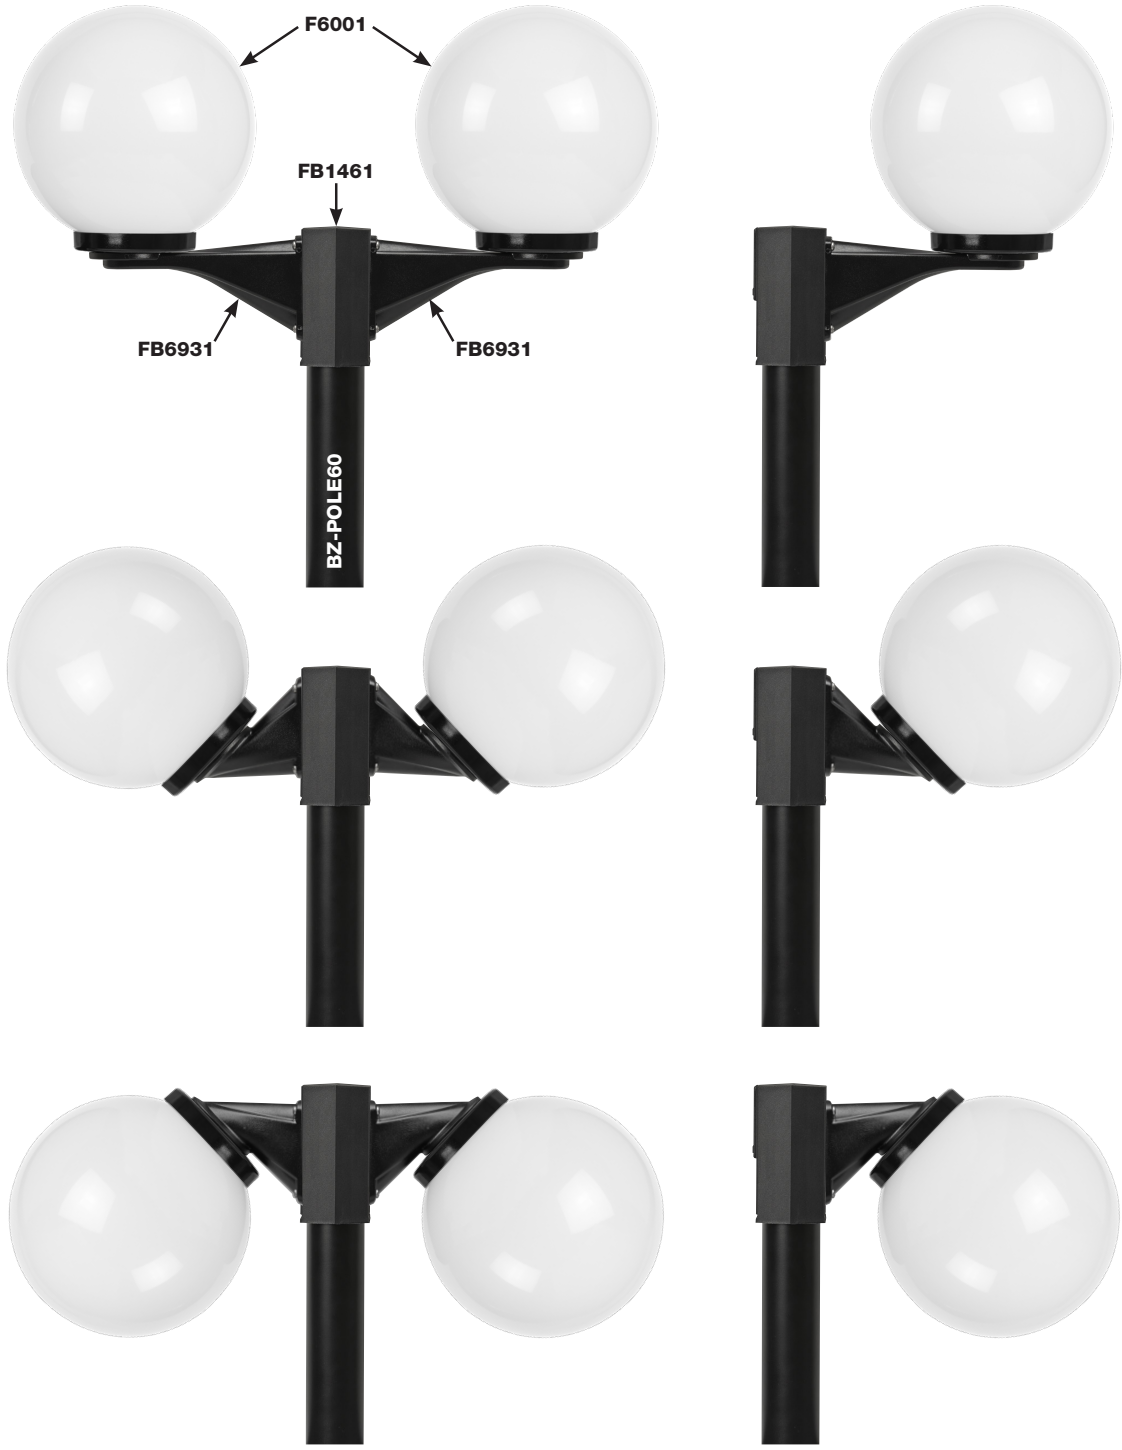

Acrylic Globes with LED fitters

Mix & match - 14 globes, 7 mounting options

Made in Italy

LED INTEGRAL GLOBE 300MMØ



INTEGRAL LED
- 980 total lm
- 8 Watts • 4,000K • CRI>80

IP 44 | 60mmØ

FLED6002
- 8 Watt LED with driver included
- Available in opal or smoke
- 300mmØ, twist lock acrylic globe
- ULOR = 6.3% smoke lens
- ULOR = 8.81% white lens

LED INTEGRAL GLOBE 400MMØ



FLED6003-WH + BZ-POLE60



Inside view of the construction of LED and driver housing

INTEGRAL LED
- 2200 total lm
- 15 Watts • 4,000K • CRI>80

IP 65 | 60mmØ

FLED6003-WH
- 15 Watt LED with driver included
- Available in opal only
- 400mmØ, twist lock acrylic globe
- ULOR = 10%

Acrylic Globes

E27 Pedestal, ceiling or wall mount globes with mounts included



E27 | IP 44 | MAX. 60W | LED REPLACEABLE

DUT1107-OP
- 250mmØ globe x 410mmH
- Includes base 140mmØ mounting
- Can be wall, ceiling or wall top mounted
- Twist lock opal globe, UV resistant acrylic lenses

E27 | IP 40 Wall | IP 43 Ceiling | MAX. 8W | LED REPLACEABLE

F1305
- Ceiling or wall mount or wall top
- Globe 150mmØ x 184mmH
- Mounting base 145mmØ
- Twist lock globe, PMMA acrylic lens

E27 | IP 44 | MAX. 15W | LED REPLACEABLE

F1303
- Wall mount globe
- 200mmØ globe x 200mm depth
- Mounting base 133mmØ
- Twist lock globe, PMMA acrylic lens

Twistlock Outdoor Globes & Fitters

Small sized globes 200mm to 250mm diameters

Made in USA

IP 44

TWISTLOCK GLOBES



White acrylic



Prismatic clear

White acrylic

D428-WH 60 Watt
- 200mmØ

D409-WH 100 Watt
- 250mmØ

Prismatic clear

D328-CL 75 Watt
- 200mmØ

D309-CL 100 Watt
- 250mmØ

E27 | 76mmØ | LED REPLACEABLE

E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

FITTERS



S048-WH



S048-BL

S048 E27 Fitter
- Available in black or white
- For globes up to 250mm
- Fits onto 76mmØ pole



Post mount example
Globe used with **S048** fitter, **BZ- Pole-1** and deck mounting **BZ Flange**

Wall mounted example



Suspension mount example





S76

S76
- Adapter to suspend, wall, pillar or ceiling mount twist lock globes
- Fits inside **S048**

LAMPS NOT SUPPLIED WITH FITTINGS - SHOWN FOR ILLUSTRATION PURPOSES ONLY

Neckless Outdoor Globes & Fitters

Medium sized globes 300mm to 400mm diametres
- IP44 when mounted upwards vertically

Made in USA

IP 44

EXAMPLE



WHITE NECKLESS GLOBES



D412-WH
D414-WH
D416-WH

E27

LED
GLS-9EWW



- 820 total lm
- 9 Watts • 3,000K • CRI>80 • 240° Beam

Acrylic
3 sizes available
D412-WH 300mm 100 Watt
D414-WH 350mm 150 Watt
D416-WH 400mm 150 Watt

ACORN GLOBE



D88065-WH

MAX. 200W

D88065-WH
- White
- Polyethylene
- Neckless globe
- 280 x 400mm

FITTERS



S041-BL



S041-WH



S76



S600-BL

E27 | 76mmØ | LED REPLACEABLE

S041 E27 FITTER
Available in black or white
- For globes 300mm and larger
- Neckless globe fitting as pendant using **S76** adapter (for use in sheltered areas)
- Fits onto 76mmØ pole

S76
- Globe hanger adapter for suspension or for wall, pillar & ceiling mount

E27 | 76mmØ | LED REPLACEABLE

S600-BL
- Aluminium wall bracket
- 330mmL
- Base mounting 152mmH x 115mmW
- Has 76mmØ mounting collar

EXAMPLE



S76 Globe adapter

SO41



Globe used with **SO41** filter and **BZ-Pole**



Neckless globe 300mm - 400mmØ, with **SO41** fitter on **BZ-POLE1** and **BZ-FLANGE** wall top mount



LAMPS NOT SUPPLIED WITH FITTINGS - SHOWN FOR ILLUSTRATION PURPOSES ONLY

76mmØ Poles and Fittings

Outdoor poles with mounts, stands and flanges to suit all outdoor applications. Use combinations shown, or make up your own

76mmØ

76mm MOUNTING ACCESSORIES



S600-BL



FB5601

S620-BL

BZ-FLANGE

S600-BL
Aluminium Wall Bracket
- Available in black
- Arm 330mmL
- Base 152mmH x 115mmW Wall mount or mount onto standard square or rectangle pole.

S620-BL
Decorative post base
- 620mmH
- Slides over 76mmØ Poles
- Made from polyethylene

FB5601
Large to small Post adapter
- Bottom to fit 90mmØ pole external or 76mmØ internal
- Top accepts 60mmØ fitters

90mm poles Superlux recommends ERW steel pipe, outside thickness 90mm

BZ FLANGE Deck mount
- For 76mmØ post
- Base 160mmØ
- Internal 76mmØ



S318-BL
- Aluminium post mount & cover
- To fit 76mmØ poles
- Base size 202mmØ
- Cover 210mmØ x 130mmH
- Comes with all anchor bolts and template

EXAMPLES OF USE



POLE used with Decorative Post Base and white acorn globe **(D88065-WH)**

76mmØ ALUMINIUM	76mmØ RESIN	76mmØ GALV STEEL
 **T300-BL** (3040mmL) **T308-BL** (2440mmL)	 **BZ- Pole2-BL** (2 metre)  **BZ-Pole1-BL** (1 metre)	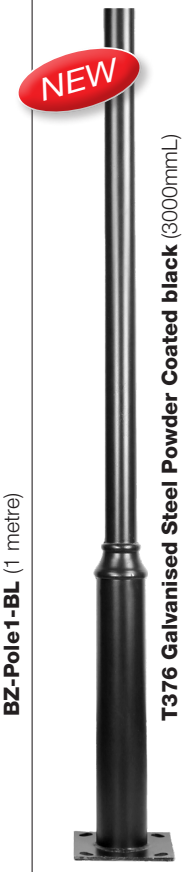 **T376 Galvanised Steel Powder Coated black** (3000mmL)
Black paint finish. **1.5mm wall thickness**	Fill with concrete or otherwise brace to aid vertical stability **2mm wall thickness**	Black powder coated finish. *Optional mounting cage available* **CAGE376 3mm wall thickness**

Mounting poles in ground	
Model:	Hole depth:
T300-BL	0.6M
T308-BL	0.5M

Important:
Place 100mm of gravel in bottom of hole and ensure the bottom part is embedded into it for drainage. Prop up the pole to level. Pour concrete around base to just below the cable entry hole, this allows about 100mm of earth over the concrete and will keep cable accessible yet concealed.

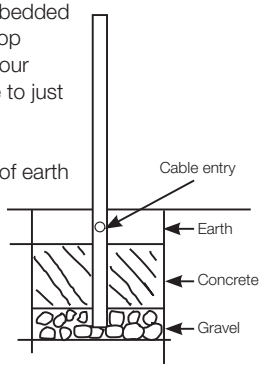

Outdoor 60mmØ Poles & Fittings

Poles with mounts, stands and flanges to suit all applications

60mmØ

60mm POLES & ACCESSORIES



FB1490



FB1461



FB1480



FB5601

NEW



F587

FB1490
Wall top short post mount for 60mmØ fixtures
- 160mmØ base x 135mmH
- Made from reinforced thermo plastic

FB1480
Base to mount 60mmØ poles
- Mount to level surface
- 160mmØ base x 125mmH
- Made from reinforced thermo plastic

FB1461
Post adapter to single or double mount FB6931 or FB6933 wall mounts
- Supplied with 4 x screws to mount 1 x wall mount bracket

FB5601
Large to small Post adapter
- Bottom to fit 90mmØ pole external or 76mmØ pole internal
- Top accepts 60mmØ fitters

90mm poles Superlux recommends ERW steel pipe, outside thickness 90mm

F587
Hanging adapter
- For globes F6000, F6001, F6002, F6003, F6004
- Purchase globes separately

60mm POLES



BZ-POLE60-3BL 3 metre pole
- Ribbed finish
- PC sleeve with galvanised steel inner tube construction



BZ-POLE60-2BL 2 metre pole • Made from reinforced polycarbonate



BZ-POLE60-1BL 1 metre pole • Made from reinforced polycarbonate

NEW



DU324 2100mm pole • Made from reinforced Duracast resin material • Decorative style with base

60mm WALL MOUNT



FB6933

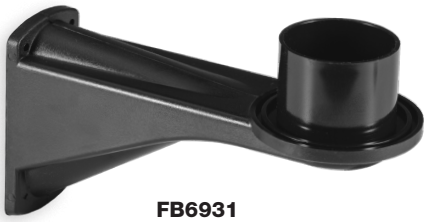

FB6931



FB3003

FB6933
- 45 degree angle
- Available in black
- Durable polycarbonate
- 136mmL
- 108mmL x 58mmH mounting base
- Can mount onto FB1461 post adaptor

Note: *If mounting downward use silicon sealant*

FB6931
- Available in black
- Durable polycarbonate
- 220mmL
- 110mmH x 60mmW mounting base
- Can mount onto FB1461 post adaptor

FB3003
- Metal mounting arm with 60mmØ mount
- Wall mount or mount onto post
- 555mmL
- Base plate 170mmH x 50mmW

304 Stainless Deck Lighting

Easy plug and play system compatible with other LLED1 items
- Kit set or individual items available to build to your requirements
- Walk over pressure max 100kgs

LED DECK LIGHT KIT SET



INTEGRAL LED
• 75 total lm • Dimmable • 120° Beam
• 1 Watt • 3,000K • CRI>80

IP 67 | 12V DC | III

LLED1-KIT6
LED Deck light kit set
Includes:
- 6 x LED lights 1 Watt each, 75 lumens each. Fits 32mmØ hole
- 1 x 10 Watt 12Volt DC driver with cord & plug
- Driver case 115mmL x 30mmW x 21mmH

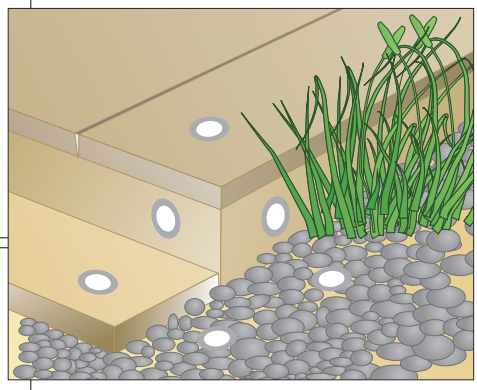

INDIVIDUAL ITEMS



LLED1-IPEC20
LLED1-IPEC45

INTEGRAL LED
• 75 total lm • Dimmable • 120° Beam
• 1 Watt • 3,000K • CRI>80

IP 67 | 12V DC | III

LLED1-L1
LED Deck light single
- 304 stainless steel flange
- 45mmØ Flange
- Fits 35mmØ hole
- 27mm depth recess required
- Lead lengths 500mmL
  LLED1-C1000 (1 metre)
  Connector cable for LLED1-system
  LLED1-2000 (2 metres)
  LLED1-5000 (5 metres)
  LLED1-TEE
  TEE connector for LLED1 system
  LLED1-IPEC20
- 20 Watt 12V, DC, LED driver
- Input 220-240V with supply cord & plug
- 12V output with cable and connector socket for LLED1 system
- 160mmL x 30mmW x 21mmH
  LLED1-IPEC45
- 45 Watt 12V, DC, LED driver
- Input 220-240V with supply cord & plug
- 12V output with cable and connector socket for LLED1 system
- 200mmL x 27mmW x 20mmH

12V Garden Light & Smart Switch

Easy plug and play system
- Mix and match with other LLED1 items available to build to your requirements
- Safe12Volt ELV power supply



LLED100-LENS
Optional hood & coloured filters. Yellow, green, blue, red





LLED101-BL

LLED105-BL

INTEGRAL LED
• 366 total lm • Dimmable
• 4.5 Watts • 3,000K • CRI>80

IP 65 | 12V DC | III

LLED105-BL
Lindon Garden Light
- Aluminium construction with black paint finish
- 4.5 Watt LED, warm white
- Comes with ground spike mount and leads with easy plug and play connectors
- Light 350mmH x 133mmØ
- Spike 200mmH
- Purchase driver separately
- Input cable 1200mmL, output cable 200mmL

INTEGRAL LED
• 200 total lm • 30° Beam
• 3 Watts • 3,000K • CRI>80 • Dimmable

IP 65 | 12V AC/DC | III

LLED101-BL
Pipa garden light
- Aluminium construction
- Ground spike included
- 40mmØ spot head
- Ground spike 161mmH

SMART CONTROL SWITCH



LLED1-SC101

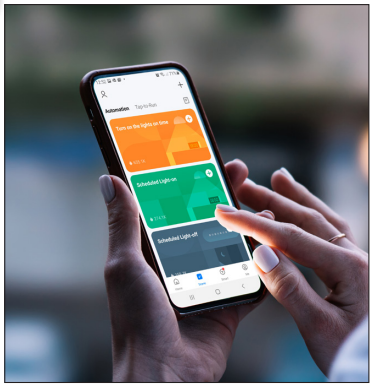

IP 67 | 12V DC | III

LLED1-SC101
Smart Control Switch
- Compatible with LLED1 plug and play system
- Remotely connect using the Tuya Smart App
- Turn lights on and off, dim and pre-set on and off times and pre-set on and off times 7 days a week and more!
- Input 5V to 24V ELV, output 12V
- Maximum capacity of up to 96 Watts
- Switch 60mmØ x 27mmH
- Leads 500mmL each side

12V Outdoor Lights

Highlight your garden features

• Use constant voltage 12V AC 50Hz or DC power supply • Use Superlux GV-T60 or SLED-IPEC control gear



LLED47111WW



LLED271-BL





SLED-WL16WH



INTEGRAL LED
• 120 total lm
• 1.5 Watts • 4,000K • CRI>80

CV 12V | IP 44 | III

LLED47111WW
- Charcoal
- 115mmH x 120Ø shade
- Pre-wired 1500mmL cord
- Supplied with 200mmL ground stake

INTEGRAL LED
• 150 total lm • 50° Beam
• 2.5 Watts • 4,000K • CRI>80

2.5 Watt | IP 54 | CV 12V | III

LLED271-BL
- Black
- 1x high power LED and 20x standard LEDS
- 125mmØ head
- Garden spike included
- Mounting flange 45mmØ accessory included
- Use Superlux GV-T60 or SLED-IPEC control gear
- 60 lux at 1metre
- Aluminium construction

INTEGRAL LED
• 60 total lm
• .75 Watt • 4,000K • CRI>80

CV 12V | IP 44 | III

SLED-WL16WH
- Charcoal
- 310mmH x 80mmW x 120mmD
- Outdoor or Indoor use
- 360 lux at 300mm
- Aluminium construction
- Pre-wired with 2 metre cable



SLED-WL16WH inground



SLED-WL16WH Wall mounted

Landscape 12V Spotlighting

Extra Low Voltage Option with integral LED or LED replacable MR16 fixtures
- Purchase control gear separately

LED SPOTS



IP 65 | 12V | AC/DC | III

INTEGRAL LED
- 390 total lm • 36° Beam
- 6 Watts • 3,000K • CRI>80

LLED4901-BL
Terran spotlight
- LED 6 Watt
- 63mmØ head
- 190mm in ground spike
- Supplied assembled with 1metre cable

IP 65 | 12V | AC/DC | III

INTEGRAL LED
- 320 total lm • 20° Beam
- 5 Watts • 3,000K • CRI>80

LLED4001-BL
Pinnacle spotlight
- LED 5 Watt
- 45mmØ adjustable head
- 430mmL above ground
- To light ornamental trees
- 170mm in ground spike
- Supplied assembled with 1metre cable

LED STAINLESS



IP 67 | 12V | 316 Stainless Steel | III

INTEGRAL LED
- 324 total lm • 45° Beam
- 3 Watts • 3,000K • CRI>80

LLED850-SS
Spruce Spotlight
- LED 3 Watt
- 85mmØ adjustable head
- Mounting base 75mmØ
- Pond side spot
- Anti-syphon device on cable
- Supplied assembled with 2 metre cable

LLED400-SS
- Optional stainless steel ground spike for LLED850-SS
- 170mmL

WATER SUBMERSIBLE SPOTS



MR16 | MAX. 35W | IP 68 | 12V | 316 Stainless Steel | LED REPLACEABLE | III

LL5010-SS
- 90mmØ flange x 100mmL x 150mmH
- Tiltable 110° degrees
- 3 metre cable

MR16 | MAX. 20W | IP 67 | Lamps Included | 12V | LED REPLACEABLE | III

LL5000-BL
- Pond side spot
- High impact non-conductive resin
- 72mm x 72mm x 90mmD
- 3 metre cable

LL0011 LENS
- Spot colour lens set for LL5000-BL, LL5010-SS
- For correct IP rating glue to outside of glass
- 67mmØ

LLED10 Series Recessed LED

Universal application

- Use constant voltage 12V AC 50Hz or DC power supply • Not polarity sensitive
- Use Superlux GV-T60 or SLED-IPEC60 control gear • Hi-grade die cast aluminium

RECESSED LED



LLED1010-BL



LLED1012-CO



LLED1010-SG



LLED1010-SS



LLED1011-SG



LL0011 Lens

Colour lens set for LLED1010, LLED1011. Lens will fit inside light, for correct IP rating glue to outside of glass

INTEGRAL LED

- 495 total lm • 25° Beam
- 5.5 Watts • 3,000K • CRI>80

IP 68 | CV 12V | III

- 480 lux at 1 metre
- Supplied assembled with cord
- Mounting niche LL8010 available

LLED1010
LLED1012

- 90mmH x 90mmØ

LLED1011

- 90mmH x 90mmØ
- Hood 35mmD

IP 68 | CV 12V | III | 316 Stainless Steel

LLED1010-SS

- 90mmØ x 53mmH
- Mounting niche LL8010 available



Supplied assembled with cord 650mmL

MOUNTING FLANGE

LL0802-SS

316 Stainless Steel





LL0802-BL

LL0802-CO





LL0802-SI

LL0802

- Optional premount flange 120mm square

MOUNTING NICHE



LL8010

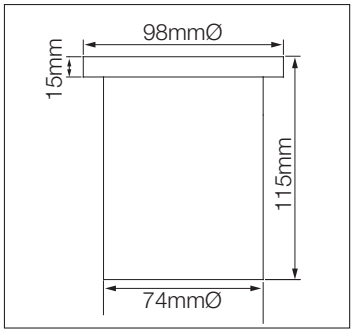

316 Stainless Steel

LL8010

- For LL10 series
- 120mmH x 100mmØ

MOUNTING BRACKET



View of kit components and assembly

LL1000

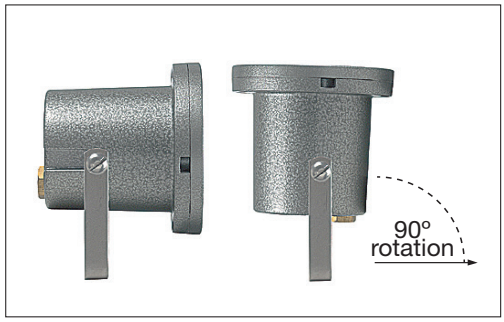

LL1000

- Optional stainless steel mounting bracket for aluminium inground series **(not stainless) model**
- Head can be rotated 90°

12V Garden Lights and Cables

Extra low voltage cabling accessories

TILTABLE



Tiltable lampholder inside

LL120-SS





SLED-RT2WH

MR16

LED
MR16-HPLED-WW



• 350 total lm
• 5 Watts • 3,000K • CRI>80 • 38° Beam

MR16 | MAX. 20W | IP 67 | 12V | LED REPLACEABLE

LL120-SS

- Adjustable tilt
- 304 stainless steel flange, die-cast aluminium body
- 120mmØ flange
- Cavity required 105mmØ x 125mmH
- Supplied with plastic mounting niche
- 600mm length cord
- Drive over - Vehicle Max 2000kg

INTEGRAL LED
• 28 total lm
• 0.4 Watts • 4,500K • CRI>80

IP 66 | CV 12V | IC-4 | 304 Stainless Steel

SLED-RT2WH

- Flange 71mmL x 40mmW x 25mmD
- Hole cut 32mmØ
- 35mm depth

16 GAUGE CABLE



SPT-3-15



SPT-3-10



SPT-3-Con

SPT-3-15
- 15 metres, 16g
- 16 gauge cable supplied with plug

SPT-3-10
- 10 metres, 16g
- 16 gauge cable plug not supplied

SPT-3-Con
- Self piercing cable connector
- Connects 18 gauge to 16 gauge or 12 gauge supply cables
- Connects 16 gauge to 12 gauge supply cable
- 53mmL x 38mmW x 17mmH

12 GAUGE CABLE



LL12-30



LL12-15



LL6001

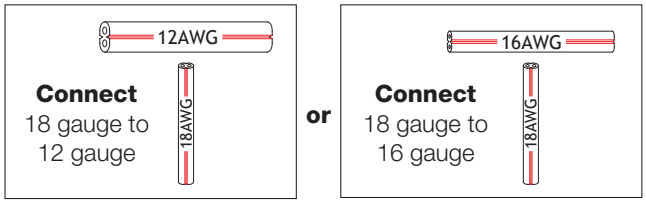

LL-12-30
- 30 metres, 12g
- Twin cable

LL-12-15
- 15 metres, 12g
- Twin cable

LL6001
For 12v garden cable
- Self piercing cable connector 12g or 16g to 18g
- 43mmL x 24mmW x 21mmH

LL6003
For 12v garden cable
- 3 cable connector with 2 way screw terminal block
- 60mmL x 40mmW x 25mmH
- Can be used for all gauges of extra low voltage cable

ELV CONNECTOR



LL6003

Outdoor Recessed Lighting

Highlight landscapes, architecture and signage
• Supplied with plastic mounting niche • 600mm length cords • Drive over - Vehicle Max 1000kg

12 VOLT RECESSED LIGHTS



LLED730-SS



Anti siphon



LLED521-SS



LLED521-CO

INTEGRAL LED
• 100 total lm • 24° Beam
• 3 Watts • 3,000K • CRI>80

IP 67 | 12V AC/DC | III

LLED730-SS
- Full 304 stainless steel construction
- 73mmØ flange
- Cavity required 68mmØ x 100mmH
- Use constant voltage 12V AC or DC power supply
- Use Superlux GV-T60 or SLED-IPEC60 control gear
- Anti siphon on cable

INTEGRAL LED
• 30 total lm
• 1 Watt • 3,000K • CRI>80

IP 67 | 12V AC/DC | III

LLED521
- Bare stainless or antique copper electroplated eyelid
- 52mmØ flange
- Single beam direction
- Full 304 stainless steel construction
- Cavity required 48mmØ x 85mmH
- Use constant voltage 12V AC or DC power supply
- Use Superlux GV-T60 or SLED-IPEC60 control gear
- Anti siphon on cable



LLED10006-SS

INTEGRAL LED
• 135 total lm • 15° Beam
• 1.5 Watts • 3,000K • CRI>80

316 Stainless Steel | IP 68 | CV 12V | IC-4 | III

LLED10006-SS
- 316 marine grade trim
- 53mmØ x 62mmD
- 45mmØ mounting hole
- Frosted glass lens
- Made from hi-grade die-cast aluminium
- Not polarity sensitive
- Purchase driver separately

The installation requires a drainage system of 30cm (gravel)

Do not install in areas at risk of flooding

Outdoor Recessed Lighting

Highlight walls, drive ways and architectural features
• Supplied with plastic mounting niche • 600mm length cords • Drive over - Vehicle Max 1000kg

12 VOLT RECESSED LIGHTS



INTEGRAL LED
• 100 total lm
• 3 Watts • 3,000K • CRI>80

IP 67 | 12V AC/DC | III

- Full 304 stainless steel construction
- 73mmØ flange
- Cavity required 68mmØ x 100mmH
- Anti siphon on cable

LV731-SS
- Single beam direction

LV732-SS
- Double beam direction


Anti siphon

240 VOLT RECESSED LIGHTS



INTEGRAL LED
• 100 total lm
• 3 Watts • 3,000K • CRI>80

IP 67 | 220V-240V

- Full 304 stainless steel construction
- 73mmØ flange
- Cavity required 68mmØ x 100mmH

LLED734-SS
- Quadruple beam direction

LLED731-SS
- Single beam direction
- Anti siphon on cable


Anti siphon

The installation requires a drainage system of 30cm (gravel)

Do not install in areas at risk of flooding

Outdoor Recessed Lighting

Highlight landscapes, architecture and signage

LED TILT & FIXED



INTEGRAL LED
• 320 total lm • 20° Beam
• 5 Watts • 3,000K • CRI>80

IP 67 | 220V-240V

LLEDT130-SS
- Adjustable tilt via exterior control 0° – 20°
- 80 lux at 3M
- 304 stainless steel flange
- Aluminium die-cast body
- 130mmØ flange
- 600mm length cord
- Supplied with plastic mounting niche
- Drive over - Vehicle Max 2000kg
- Cavity required 115mmØ x 145mmH

INTEGRAL LED
• 152 total lm • 15° Beam
• 3 Watts • 3,000K • CRI>80

IP 67 | 220V-240V

LLEDF120-SS
- 304 stainless steel flange
- Aluminium die-cast body
- 120mmØ flange
- 600mm length cord
- Supplied with plastic mounting niche
- Drive over - Vehicle Max 2000kg
- Cavity required 105mmØ x 100mmH

LED TILTABLE SPOTLIGHT



INTEGRAL LED
• 270 total lm • 50° Beam
• 3 Watts • 3,000K • CRI>80

IP 67 | 304 Stainless Steel | 220V-240V

LLED401-SS
- 3 Watt integral LED spot light
- Cree LED technology
- Made from stainless steel
- 97mmØ x 97mmH
- Driver integral in body wire straight to mains

LLED400-SS
- Optional S/S ground spike for LLED401-SS
- 170mmL

LED FLOOD LIGHT



E27 | PAR 38 | MAX. 150W

IP 66 | 220V-240V | LED REPLACEABLE

LL7531-BL
- Aluminium construction
- PAR38 spotlight
- LED replaceable fitting
- Head 175mmW x 190H x 260mmD
- 150mm stem
- Base mounting 110mmL x 80mmW
- Supplied with 3 metre cable

E27

LED
PAR38-15WLED-DL



• 1200 total lm • IP65 • Dimmable
• 15 Watts • 5,000K • CRI>80 • 40° Beam

Tube Outdoor Series

Replaceable lamp allows different beam angle and colour selection

DIRECTIONAL SPOTS



LL0211-BL



LL0211-SI



LL0211 directional spotlight joined to surface mount transformer kit LL-T70 kit

SURFACE MOUNT DRIVER KIT



LL-T70KIT-BL



LL-T70KIT-CO



LL-T70KIT-SI



DRIVER
included

ACCESSORIES & EXAMPLES OF USE



LL9000



LL015



LL030



LL0211
Shown with
LL9000 stake

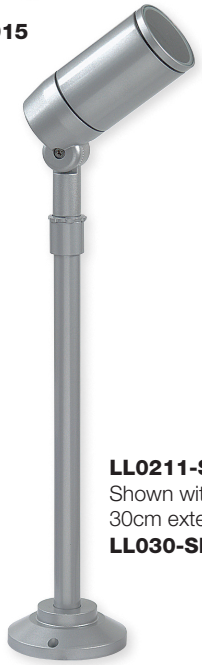

LL0211-SI
Shown with
30cm extension
LL030-SI



Also available in a 15cm extension
LL015-SI

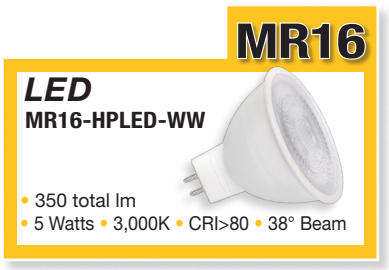



LL0211
- Adjustable heads
- High grade die cast aluminium with glass lenses
- 55mmØ x 120mmH tube, 90mmØ base
- Supplied with 1.6 metre cable
- Optional LL1005 colour lenses will fit inside light. For correct IP rating glue to outside of glass
- Use Superlux GV-T60 or SLED-IPEC60 control gear

LL-T70KIT
Surface wall mounting driver kit
For LL3403, LL0123, LL0113 and LL0211 models
- Kit includes: SLED-EC20 driver 1-20 Watts, double insulated barrier, connectors, fasteners
- 47mmH x 90mmØ

LL9000-BL
- 180mm stake
- Internal thread

LL015
- 20mmØ x 150mmH
- Extension

LL030
- 20mmØ x 300mmH
- Extension

Electrical Terminal Blocks

Good quality Italian made terminal blocks

Made in Italy

3 WAY TEE

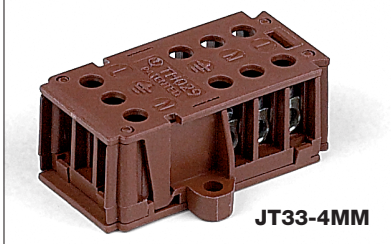

JT33-4MM

HEAVY DUTY

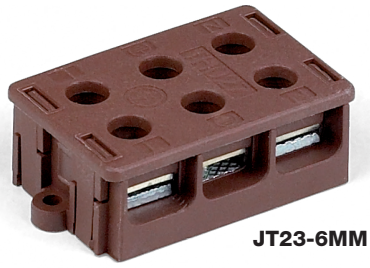

JT23-6MM

JT33-4MM
- 3 way TEE terminal block
- For connecting 3 cables at TEE section
- 3 poles, 4mm²
- 32A, 450V
- 40mmL x 31mmW x 16mmH

JT23-6MM
- Heavy duty 3 pole terminal block
- For connecting heavy duty cable upto 6mm²
- 3 poles, 6mm²
- 41A, 450V
- 50mmL x 29mmW x 16mmH

Electrical Connectors Quick Guide

Quick connect solutions for a variety of applications
- This Italian range of connectors is stocked by Superlux
- Use the quick connect guide below to find a suitable connector for your requirements

Made in Italy

IP Connectors

Product	Model number	Description	IP	Number of poles	mm²	Cable Ø range
	JT13-512PE	Panel mount plug with cap, for blind mounting	IP68	3	4	5mm-12mm
	JT24-512F	Mini direct connector cable to cable	IP68	4	4	5mm-12mm
	JT33-495F	3 cable box connector	IP67	3 x 3 poles	4	4mm-9.5mm
	JT35-517F	3 cable large T connector	IP68	5	4	5mm-17mmØ

Terminal Block

	JT23-6MM	Heavy duty 3 way terminal block		3	6	
	JT33-4MM	3 way T-junction terminal block		3	4	

Professional Grade Cable Connectors

IP67 and IP68 waterproof cable connectors
- High performance electrical connectors made from premium grade materials

IP 68 Made in Italy

MINI DIRECT



JT24-512F

JT24-512F
- IP68 mini direct cable connector
- For round cables 5mm-12mmØ
- 4 pole round terminal block included, 4mm²
- 32A, 450V
- 72mmL x 23mmØ

BLIND MOUNT PANEL PLUG



JT13-512PE

JT13-512PE
- IP68 panel mount plug and socket with cap-blind mount
- Mounts into 26mmØ hole
- For round cables 5mm-12mmØ
- 3 pole round terminal plug and socket included, 4mm²
- Use in temporary situations or where maintenance is required
- Blind mount expander mechanism requires no need to access the back of the panel
- 16A, 400V
- Will fix to uneven/curved mounting surfaces

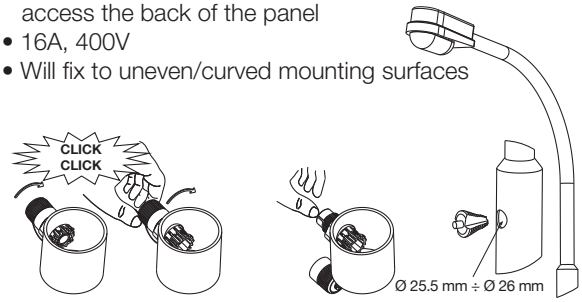

LARGE 3 CABLE



JT35-517F

JT35-517F
- IP68 Large 3-cable connector
- For round cables 5mm -17mmØ
- 5 pole round terminal block included, 4mm²
- 32A, 250V
- 175mmL x 65mmW x 35mmH

BOX 3 CABLE

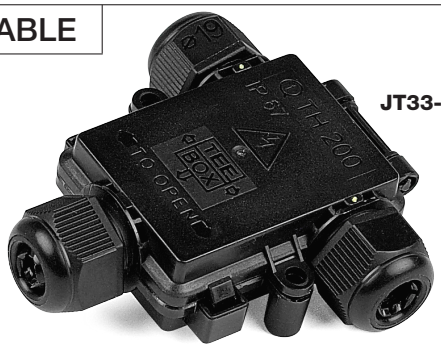

JT33-495F

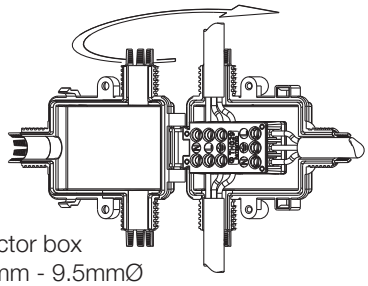

IP 67

JT33-495F
- IP67 3-cable connector box
- For round cables 4mm - 9.5mmØ
- 3 x 3 pole TEE terminal block included, 4mm²
- 16A, 450V
- 85mmL x 85mmW x 22mmH

Square LED Surface Lights -12V

Interchangeable covers click onto the main body

- Ideal halogen replacements • Surface mounted, no recess required • Covers supplied separately
- Covers available in 3 colours; charcoal, silver or white • 124mm square x 22mm depth
- Polycarbonate body and lens - covers made from ABS • Indoor & outdoor use • Purchase control gear separately

SQUARE PLAIN



LKV12401 (Body)



Fully assembled body and cover

INTEGRAL LED
• 200 total lm • 110° Beam,
• 3.8 Watts • 3,000K • CRI>80

IP 65 | 12V AC/DC | III

LKV12401
• 3.8 Watt integral LED main body, wall or ceiling mount



LK1441-CC



LK1441-SI



LK1441-WH

LK1441
• Cover only, place onto LKV12401

SQUARE DEFLECTOR



LKV12403 (Body)



Fully assembled body and cover

INTEGRAL LED
• 55 total lm
• 1.5 Watts • 3,000K • CRI>80

IP 65 | 12V AC/DC | III

LIGHT CUT OFF

LKV12403
• 1.5 Watt integral LED main body
• ULOR = 0.8%

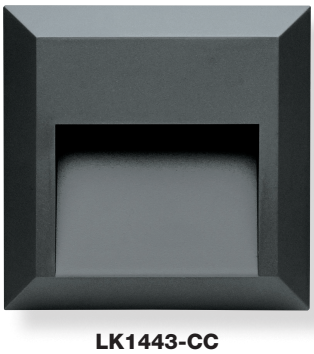

LK1443-CC

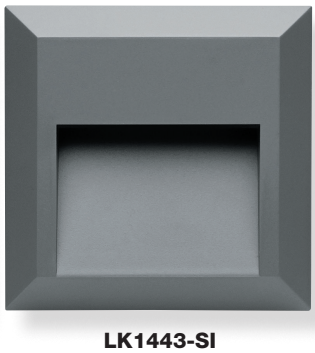

LK1443-SI



LK1443-WH

LK1443
• Cover only, place onto LKV12403

Surface Mount LED Brick Lights -12V

No Recessing required

• Ideal halogen replacements • Interchangeable covers simply click onto the main body • Covers supplied separately
• Covers available in 3 colours; charcoal, silver or white • Polycarbonate body and lens - covers made from ABS
• Indoor & outdoor use • Purchase control gear separately

RECTANGULAR PLAIN



LKV12301 (Body)



LK2331-CC



LK2331-SI

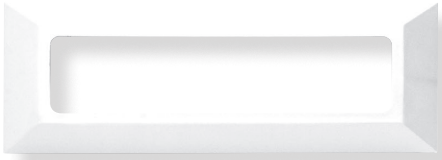

LK2331-WH

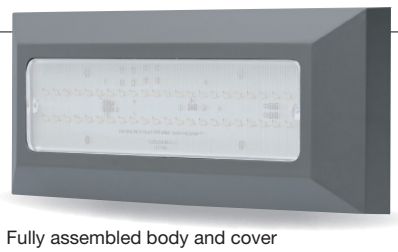

Fully assembled body and cover

HORIZONTAL DEFLECTOR



LKV12302 (Body)



LK2332-CC



LK2332-SI

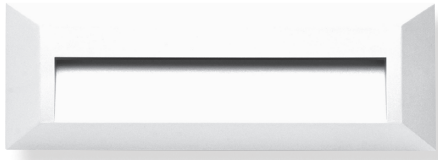

LK2332-WH

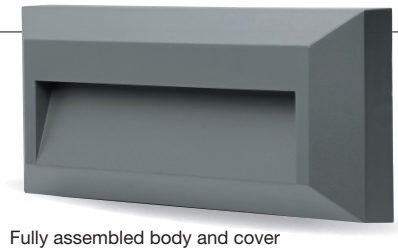

Fully assembled body and cover

INTEGRAL LED
• 200 total lm • 110° Beam
• 3.8 Watts • 3,000K • CRI>80

IP 65 | 12V AC/DC | III

LKV12301
• 3.8 Watt integral LED main body, wall or ceiling mount
• 230mmL x 80mmW x 22mm depth

LK2331
• Cover only, place onto LKV12301

INTEGRAL LED
• 70 total lm
• 1.8 Watts • 3,000K • CRI>80

IP 65 | 12V AC/DC | III | LIGHT CUT OFF

LKV12302
• 1.8 Watt integral LED main body
• 230mmL x 80mmW x 22mm depth
• ULOR = 0.9%

LK2332
• Cover only, place onto LKV12302

LED Surface Mount Lights

Pathway lighting in hi-grade die-cast aluminium
• Use constant voltage 12V AC 50Hz or DC power supply • Use Superlux GV-T60 or SLED-IPEC60 control gear



LLED3030-CC



LLED3030-SI

INTEGRAL LED
• 135 total lm
• 1.5 Watts • 3,000K • CRI>80

CV 12V | IP 54 | III

LLED3030
• 90mmW x 85mmH x 50mmD
• Easy installation no recess required



LLED3504-CC



LLED3504-SI

INTEGRAL LED
• 135 total lm
• 1.5 Watts • 3,000K • CRI>80

CV 12V | IP 55 | III

LLED3504
• 90mmØ x 50mmD
• Easy installation no recess required
• Can be shallow recessed if desired

Tube Outdoor Series

Replaceable lamp allows different beam angle and colour selection
• Use Superlux GV-T60 or SLED-IPEC60 control gear
• Outdoor fittings in hi-grade die-cast aluminium, with glass lenses

TUBE WALL LIGHTS



LL0123-CO



LL0123-SI



LL0113-CO



LL0113-SI



LL0113
Directional spotlight joined to surface mount transformer kit **LL-T70 kit**

MR16

LED
MR16-HPLED-WW



• 350 total lm • 38° Beam
• 5 Watts • 3,000K • CRI>80

MR16 | MAX. 35W | 12V | IP 55 | LED REPLACEABLE | III

LL0123
• Tube dual light
• 55mmØ x 190mmH tube
• 90mmØ mounting flange

MR16 | MAX. 50W | 12V | IP 55 | LED REPLACEABLE | III

LL0113
• Tube solo light
• 55mmØ x 110mmH
• 90mmØ mounting flange

Security Floodlights

Adjustable spot and flood lighting

BARRET SPOTLIGHTS



KSL210-BL

IP 54

KL10-BL

IP 54



KN20-BL

IP 65



KDU15-BL



KSL5-BL



INTEGRAL LED
• 1300 total lm • 90° Beam
• 2 x 10 Watts • 5,000K • CRI>80

KSL210-BL
Barret twin LED PIR security light
Can be eave or wall mounted
- Automatic PIR mode
  - Detection area 160° up to 12 metres
  - "On" time adjustable 7sec–10min
  - Lux adjustment 3 to 2000 Lux
- Has manual override ability
- Mounting base 120mmØ
- Durable die-cast aluminium head with polycarbonate sensor housing and base

INTEGRAL LED
• 650 total lm • 90° Beam
• 10 Watts • 5,000K • CRI>80

KL10-BL
Barret LED spotlight
Can be eave or wall mounted
- Mounting base 120mmØ
- Durable die-cast aluminium head with polycarbonate base

INTEGRAL LED
• 1800 total lm • 60° Beam
• 20 Watts • 4,000K • CRI>80

KN20-BL
- 20 Watt LED floodlight with Intense 60° narrow beam angle
- Supplied with pre-wired 500mm cable
- 170mmW x 155mmH x 40mmD

INTEGRAL LED
• 240 total lm • 60° Beam
• 5 Watts • 3,000K • CRI>80

IP 44

KSL5
- 5 Watt LED flood light similar light effect to 20W halogen
- PIR detection range is 130° & 12m depth
- 60mmW x 115mmD x 180mmH
- Mounting base 60mmW x 70mmH

E27

LED
SBL-8EWW
• 806 total lm
• 8 Watts • 3,000K • CRI>80 • 250° Beam

E27 | IP 44 | MAX. 15W | LED REPLACEABLE

KDU15-BL
- Adjustable head tilts 180°
- Flood head 200mmW x 80mmD x 80mmH
- Mounting base 90mmØ
- Fully extended arm with head 200mm

Economy Security Lights

Non-Corrosive mounting brackets, will not rust away

TWIN SENSOR FLOODLIGHTS



KS200-SI

LED INCLUDED



KS200-BL

2X R7s 78 | IP 33 | MAX. 100W

KS200

- Sensor light
- Contemporary design, powerful performance
- Uses passive infrared motion detection
- Mounting base 105mmØ
- 2 x LEDLIN78-6 lamps included

R7s 78mm

LED

LEDLIN78-6 ***2 x Included***



- 600 total lm
- 6 Watts • 3,000K • CRI>80 • 360° Beam

LINEAR HALOGEN FLOOD LIGHTS



LED INCLUDED

KS150-WH

R7s 78 | IP 44 | MAX. 150W

KS150

- Uses passive infrared motion detection
- Eave or wall mounting
- Powerful performance
- Adjustable dusk to dawn setting
- Adjustable on time duration
- Adjustable positioning direct the sensor & the light separately where you want them
- Stainless steel mounting bracket
- 1 x LEDLIN78-6 lamps included

R7s 78mm

LED

LEDLIN78-6 ***Included***



- 600 total lm
- 6 Watts • 3,000K • CRI>80 • 360° Beam



K150-WH

R7s 78 | IP 54 | MAX. 150W

K150

- Without sensor
- Eave or wall mounting
- Discreet design, powerful performance
- Stainless steel mounting bracket

R7s 78mm

LED

LEDLIN78-6



- 600 total lm
- 6 Watts • 3,000K • CRI>80 • 360° Beam



K500-WH

R7s 118 | IP 54 | MAX. 500W

K500

- Without sensor
- Eave or wall mounting
- Discreet design, powerful performance
- Stainless steel mounting bracket

R7s 118mm

LED

LEDLIN118-12



- 1000 total lm
- 12 Watts • 3,000K • CRI>80 • 360° Beam

PAR38 Flood Lights

Manual switching, PIR switching or daylight switching

PAR38 DURABLE FLOODLIGHTS



KP150-BL



KP300-BL



KPDS300-BL



DUSK TO DAWN SWITCHING

E27

LED

PAR38-15WLED-DL



• 1200 total lm • IP65 • Dimmable
• 15 Watts • 5,000K • CRI>80 • 40° Beam

E27 | MAX. 100W | IP 55 | LED REPLACEABLE

KP150-BL

- PAR 38, wall or eave mount
- Strong construction, ceramic lamp holder
- 230mmL floodlight, mounting base 86mmØ

2x E27 | MAX. 150W | IP 44 | LED REPLACEABLE

KP300-BL

- PAR 38, wall or eave mount
- Strong construction, ceramic lamp holder
- Mounting base 88mmØ

2X E27 | MAX. 150W | IP 44 | LED REPLACEABLE

KPDS300-BL

- PAR 38, wall or eave mount
- Strong construction, ceramic lamp holder
- Dusk to dawn photocell switch, ensures light is on at night for security yet turns off in the day, to ensure energy saving
- Mounting base 88mmØ

Freelite™ Solar Flood Lights

Easy to setup - 7 different light modes IP 65

NOX FLOOD LIGHTS



PVF127-BL



PVF130-BL

Freelite™ SolarLED
• 1700 total lm • Autonomy 1-2 days
• 6,500K • CRI>80 • 90° Beam

PVF127-BL
NOX PIR Sensor flood

- Solar powered flood light with PIR sensor
- Flood Light 210mmH x 255mmW
- PV panel 300mmH x 205mmW
- Connection cable included 2200mmL
- PIR sensor range 10 metres, 120°
- Made from UV stabilised ABS

Freelite™ SolarLED
• 3200 total lm • Autonomy 1-2 days
• 6,500K • CRI>80 • 90° Beam

PVF130-BL
NOX Flood light

- Solar powered flood light
- Flood Light 218mmH x 280mmW
- PV panel 390mmH x 360mmW
- Connection cable included 2200mmL
- Made from Die-cast aluminium

PVP100-EX2
Optional Extension Cable

- For PVF127-BL and PVF130-BL
- 2000mmL

LED Directional Floodlights

Shop Light Fitting

35 WATT



SSL35-BL

SSL35-WH

INTEGRAL LED
• 2805 total lm • 30° Beam
• 35 Watts • 4,200K • CRI>80

IP 40

SSL35
- 35 Watt integral LED
- Integral driver
- 260mmW x 398mmH x 286mmL

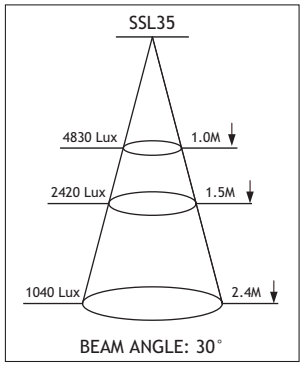

Alogeno Outdoor Lighting

All have tempered glass diffuser and aluminium body
- Choice of 300 Watt R7's halogen or 2 x 26 Watt fluorescent • Available in black and silver
- Optional extension arms and barn doors • Lamps are included

Manufactured in Italy

R7s OR FLUORESCENT

GT4631-SI
GT4633-SI



GT4633-BL



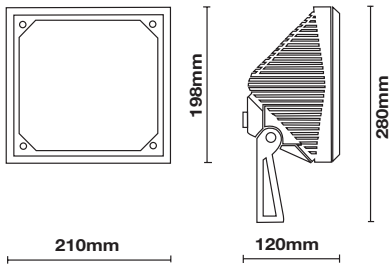

R7s 118mm

LED
LIN118-12WLED-CW



• 1200 total lm
• 12 Watts • 4,000K • CRI>75

R7s 118 | MAX. 300W | IP 55 | LED REPLACEABLE

GT4631
- Linear, 300 Watt halogen lamp included

G24q3

FLUORESCENT
PLCQ-26WW



• 1768 total lm
• 26 Watts • 2,700K • CRI>82

G24 q-3 | 2x 26W | IP 55

GT4633
- 2x 26 Watt PLC 4 Pin fluorescent
- Electronic ballast included

Display & Sign Lights

Quality die cast aluminium fixtures

LED



• Product warranty void when used for commercial rental

INTEGRAL LED
• 250 total lm • 65° Beam
• 4.5 Watts • 3,000K • CRI>80

IP 44

LSL142-BL
- Black aluminium LED spotlight
- Tiltable head
- Adjustable clamp, min 20mm max 35mm
- Supplied with 3 metre cord plug
- 700mmL
- LED driver Integral in body

INTEGRAL LED
• 850 total lm • 45° Beam
• 9 Watts • 3,000K • CRI>80

IP 65

LSL222-BL
- Black aluminium LED flood light
- Tiltable head
- 830mmL
- Head 180mmL X 125mmW
- Mounting base 110mm square
- Supplied asembled with cord
- 70 lux at 2 metres
- 35 lux at 3 metres
- LED driver Integral in body

LED Security Floodlights

Ideal for eave or wall mounting

- Die cast aluminium
- Quality integral long lasting Meanwell driver and high brightness, low light depreciation Bridgelux LED COB

IP 65





INTEGRAL LED
• 3750 total lm • 120° Beam
• 50 Watts • 4,000K • CRI>80

KR50-SI
- 290mmW x 125mmD x 240mmH

INTEGRAL LED
• 750 total lm • 120° Beam
• 10 Watts • 4,000K • CRI>80

KSR10
- PIR motion sensor detection range is 180º and 12 metres depth
- 140mmW x 100mmD x 180mmH

Exterior Sensors

Passive infrared and dusk to dawn automatic switching

IP 44 | 220V-240V

PIR SENSOR



ND180-WH

ND180

- 12 metre 180º exterior wall PIR motion detector
- Recommended mounting height 2.2m
- Adjustable sensor from left to right 120º, up and down 30º
- Adjustable time and lux settings
- Relay switched suitable for energy saver lamp technology
- 95mmH x 95mm Depth x 64mmW
- Max 1000 Watt incandescent
- Max 400 Watt fluorescent
- Max 300 Watt LED

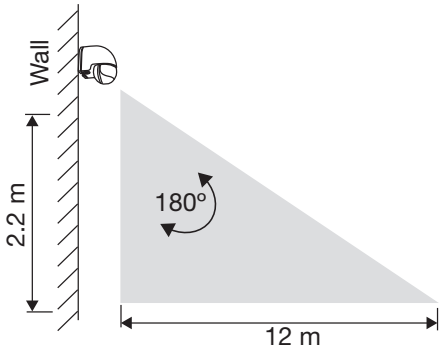

PHOTOCELL SENSOR



ND100-BL



ND100-WH

ND100

- Photocell dusk to dawn sensor
- Automatic security and safety
- Will automatically turn lights on at night time and will switch lights off during the day
- Adjustable sensitivity between 1-10 lux
- 10A relay
- 95mmH x 95mm Depth x 64mmW

PIR Motion Sensors

Passive infrared recessed or surface mount

230V-240V

INTERIOR PIR



ND360

IP 20

ND360

- 9 metre 360º ceiling PIR motion detector
- Surface mount
- Recommended mounting 2.8mH
- 140Ø x 40mm Depth
- Adjustable time delay and lux settings
- Max 1000 Watt incandescent
- Max 400 Watt fluorescent
- Max 300 Watt LED



Digital Occupancy Sensors

Medium and long range

IP 20 | 220V-240V

24 METRE 360°



ND463

ND463

- 24 metre 360º ceiling occupancy sensor
- Trio digital sensor technology for superior detection, this ensures its ability to detect at every angle
- Surface mount
- Recommended mounting height 2.8m
- 122Ø x 65mmD
- Adjustable time and lux settings
- Detection area can be adjusted from 180° to 360º using 18º segment cap supplied
- Max 2000 Watt incandescent
- Max 800 Watt fluorescent
- Max 600 Watt LED

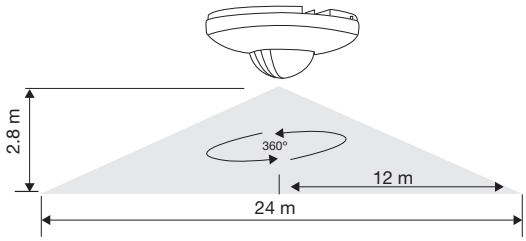

Electronic Switches

A selection of passive infra-red or 'proximity' cupboard electronic switches for easy and convenient automatic switching

PROXIMITY SWITCHES



1.5 METRE RANGE PIR

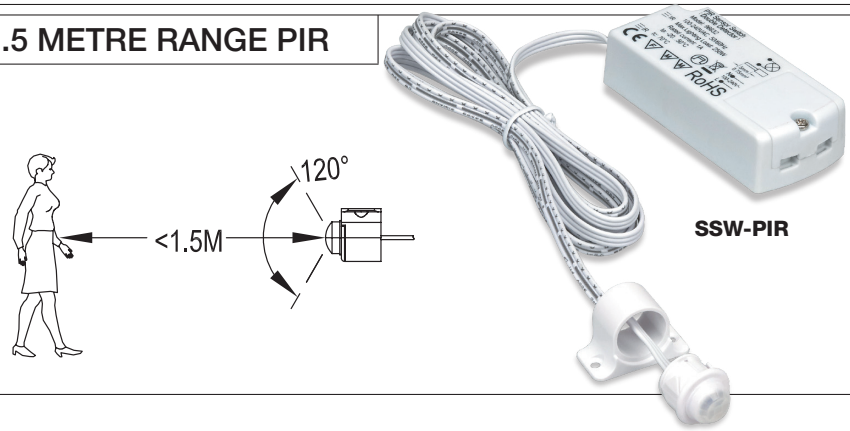

Cupboard / Door switches

SSW-PROX (Single)

Function: An object moved within the 10cm detection range (e.g. Door) will switch 'Off' the connected item until the object is removed. Switch is 'normally On'.

- PIR can be surface mounted or mounts in a 15mmØ hole
- Max load 250 Watt
- 230 – 240V 50HZ
- E.L.V PIR

SSW-PROX (Double)

Function: When an object moved within the 10cm detection range of both detectors (e.g. Door) will switch 'Off' the connected item (eg: Light) until the object is removed. If either of the doors is open the light will switch "On".

- PIR can be surface mounted or mounts in a 15mmØ hole
- Max load 250W
- 230 – 240V 50HZ
- E.L.V PIR

SSW-PIR

Function: When a person is detected within the 1.5 metre range of the PIR sensor the connected item (eg: light) will switch "on". After 45 seconds the light will switch "off" automatically. Funtions under any light level.

Fluoro Ballast with Lampholder

Easy lighting installation • Purchase lamp separately



PL-C 2 PIN | 18 Watt

L566

- For use with PLC 2 Pin 18 Watt Compact Fluorescent lamps

PL-C 2 PIN | 26 Watt

L200

- For use with PLC 2 Pin 26 Watt Compact Fluorescent lamps

Furniture Lighting 12V DC

Superlux SLED connection system, can be used with other SLED lights on the same driver

RECESSED LED



SLED-UC3-SI | SLED-UC3-BL | SLED-UC3-WH

INTEGRAL LED
• 260 total lm • 60° Beam
• 3 Watts • 3,000K • CRI>80

CV 12V DC | IC-F | III

SLED-UC3
- 3 Watt high power LED 370 lux at 600mm
- Silver
- 62mmØ x 10mmH
- Hole cut size 55mmØ
- Constant voltage DC
- Use SLED 12Volt DC control gear
- Supplied with 1500mm inputcable and plug
- Silver and white models directly linkable from one to another output cable 70mm

SURFACE MOUNT RING



SLED-DR-SI | SLED-DR-BL | SLED-DR-WH

SLED-DR
- Surface mount ring for SLED-UC3
- 62mmØ x 12mmH
- Purchase separately



EXAMPLE

SURFACE MOUNT LED



SLED-UCP-SI

INTEGRAL LED
• 260 total lm • 60° Beam
• 3 Watts • 3,000K • CRI>80

CV 12V DC | III

SLED-UCP-SI
- 3 Watt high power LED 370 lux at 600mm
- Silver
- 60mmW x 90mmL x 5mmH
- Constant voltage DC
- Use SLED 12Volt DC control gear
- Supplied with 1500mm cable and plug

15 WATT LED DRIVER

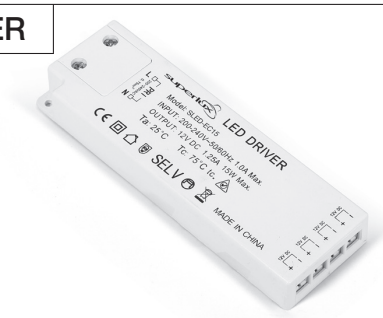

SLED-EC15

CV 12V DC | 15 Watt

SLED-EC15
- 130mmL x 46mmW x 15mmH min hole 48mmØ
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 1-15 Watts
- 12 Sockets

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
SLED-UC3	IC-F	Closed	No restrictions	Yes	55mm	15mm	N/A

Furniture Lights

All furniture lights have 400mm leads with AMP plugs
- Purchase 12V transformer or driver separately

MAX. 20W | 12V



SVU-13-WH



SVU-13-SC



SVU-DR-WH



SVU-DR-SC



SVU-21DR-WH



SVU-F11-WH



SVU-F11-SC



35mmØ MR11 lamp



SVU-365-BS

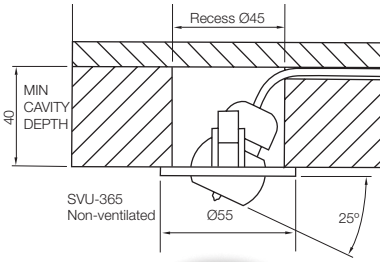



SVU-319-WH



SVU-319-BS



SVU-319-CH



SVU-05-BS



SVU-05-CH

G4.0

HALOGEN
HCAP-20
Included



- 200 total lm • Dimmable
- 20 Watts • 3,000K • CRI>100

G 4.0 | LED REPLACEABLE

SVU-13
- Flange 68mmØ, fits 58mmØ recess
- 25mm cavity depth

SVU-DR
- Surface rings for type SVU-13 and SVU 02
- 64mmØ x 26mmH

G 4.0 | LED REPLACEABLE

SVU-21DR
- 103mmØ x 35mmH
- Individually switched
- Surface mounted

MR11

SVU-F11
- Front face 55mmØ
- Fits 45mmØ hole

G 4.0

SVU-365
- Fits 45mmØ hole

G 4.0

SVU-319
- Flange 38mmØ, fits 25mmØ hole

G 4.0 | MAX. 10W

SVU-05
- Flange 41mmØ, fits 32mmØ hole

Cupboard Strip Lights

Task lighting for in and under cupboards

LED CUPBOARD LIGHT

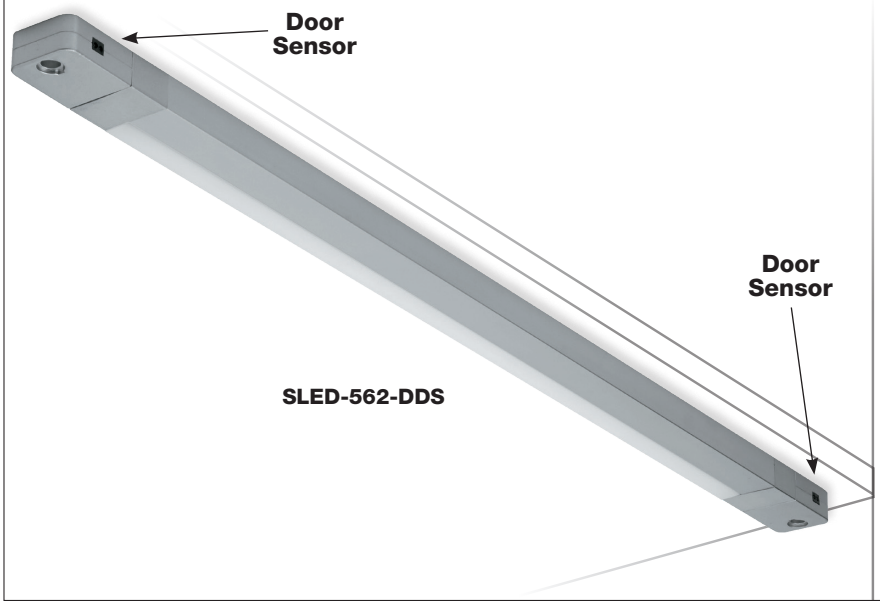

INTEGRAL LED
• 400 total lm
• 5.4 Watts • 3,000K • CRI>80

CV 12V DC III

SLED-562-DDS
- LED strip light with 2 door switches
- Can be installed in 1 or 2 door cupboards
- 562mmL x 15mmH x 30mmD
- Supplied with 1500mmL cables
- Purchase Superlux SLED-EC15 driver separately
- **Function:** When doors are within range of both detectors the light will switch 'off' until the door is opened. If Installed in a cupboard with double doors when either of the doors are opened the light will switch 'on'

UNDER CUPBOARD LIGHT



INTEGRAL LED
• 720 total lm • 120° Beam
• 9 Watts • 4,100K • CRI>80

220V-240V

SVULED-BAR3-SI
- 3 light under cupboard strip
- Sensor switch /no touch great in kitchens for wet or sticky hands turn On/Off by waving hand past sensor 80mm detection range
- 1500mmL cord and plug
- 750mmL x 68mmW

KICK BOARD LIGHTS



INTEGRAL LED
• 160 total lm
• 1.8 Watts • 3,000K • CRI>80

CV 12V DC III

SLED-W145-SI
- Can be installed in plaster board and kick boards
- Has both input and output cables for easy daisy chain
- Silver aluminium
- 145mmL x 40mmH x 15mmD
- Use Superlux 12V SLED-EC5 or SLED-EC15 drivers

SLED-PREWIRE
- Designed to make cabling quick and easy, its best that the cable is installed in the timber framed wall before the wall lining is installed.

LED Flexible Strip

High brightness 1080 lumens per metre
Slim joiner plugs allow continuous lighting effect at joins





Quick and easy to join connectors - no soldering required

CV 12V DC IP 65 LED

- 9.6Watts per metre
- Warm white 3,000K
- Available in 3 lengths 0.5m, 2m and 5m
- Directly linkable
- 12Volt DC
- Plug into DC power supply using SLED-FEEDF (see below) or 12Volt battery
- Flexible, sealed in clear silicon resin
- Water resistant to IP65 when joins are sealed
- Double sided tape on back for easy mounting
- Can be cut every 25mm where marked
- Dimmable

FLEXIBLE STRIP 9.6W PER METRE



SLED-F60-WW



SLED-F240-WW

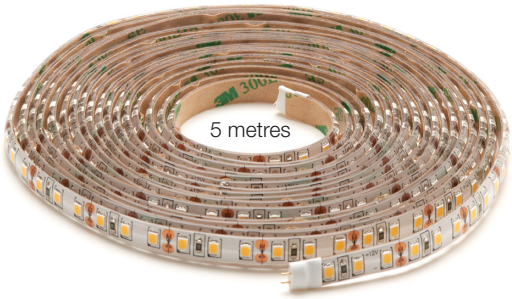

SLED-F600-WW

SLED-F60-WW	0.5M	4.8W	Warm white 3,000K	540 lm
SLED-F240-WW	2M	19.2W	Warm white	2160 lm
SLED-F600-WW	5M	48W	Warm white	5400 lm

FLEXIBLE STRIP ACCESSORIES



SLED-FEEDF



SLED-JOINF

SLED-FEEDF
- Power supply feed
- One is required between LED power supply and first run of LED strip
- 1.5 metres

SLED-JOINF
- For corner joins less than 25mm radius
- 50mm length

LED HOUSING 2 METRE 24MM PROFILE

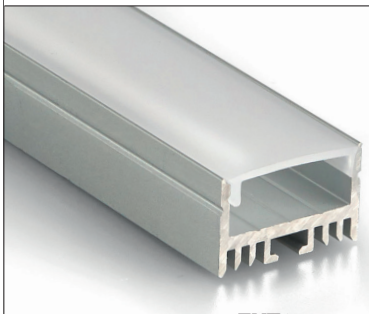

EXT25 + EXT25-DIF1

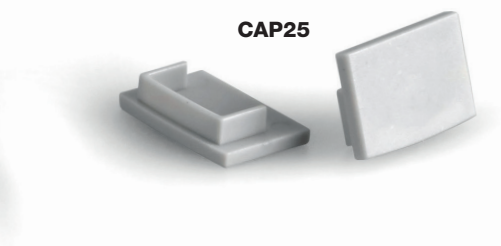

CAP25

EXT25 + EXT25-DIF1
- Aluminium base to house LED strips and acrylc opal matt lens
- 15mmH x 24mmW x 2000mmL

CAP25
- 2 x plastic end caps
- Silver



LED String Modules

LED modules for display signage and kick board lighting

DISPLAY AND SIGNAGE MODULES





SLED-M21-DL
(7 Modules)



SLED-M60-DL
(20 Modules)

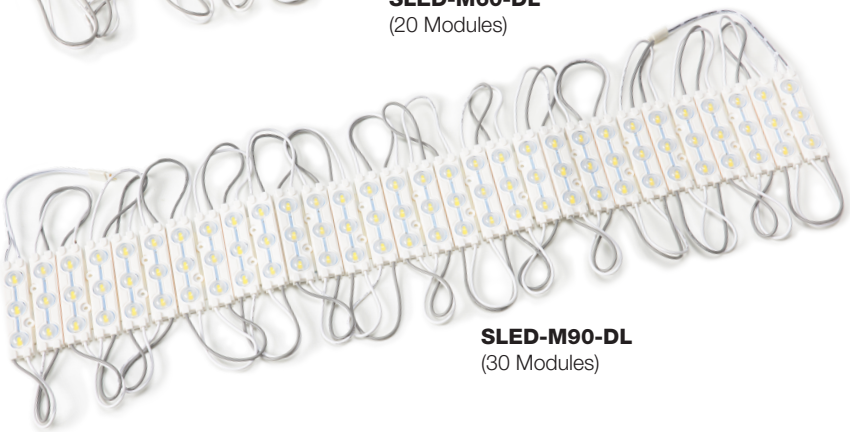

SLED-M90-DL
(30 Modules)

SLED-M21-DL	7 Module set	7 Watts	Daylight 5,000K	644 lm
SLED-M60-DL	20 Module set	20 Watts	Daylight 5,000K	1840 lm
SLED-M90-DL	30 Module set	30 Watts	Daylight 5,000K	2760 lm

CV 12V DC | IP 65 | LED

- Each module 1 Watt LED COB. 92 lumens
- Available in 7, 20, or 30 modules string sets
- 5,000K
- Sets can be easily connected together to make up your required combination
- Supplied with adhesive tape on the back of each module
- Module size 67mmL x 16mmW x 7mmH
- Length of cord between each module 100mm
- 160 Degree Lens



EXAMPLE OF LAYOUT

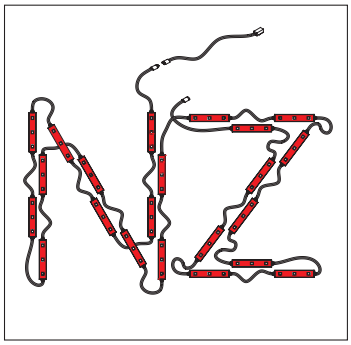

POWER SUPPLY AND FEED CABLE



SLED-FEEDF



SLED-EC15

SLED-FEEDF
- Power supply feed. One is required between LED power supply and first set of string modules

CV 12V DC | 15 Watt

SLED-EC15
- 130mmL x 46mmW x 15mmH min hole 48mmØ
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 1-15 Watts
- 12 Sockets

LED Drivers 12V Constant Voltage

12Volt DC power supplies and controllers

LED POWER SUPPLIES



SLED-EC5



SLED-EC15



SLED-EC30



SLED-EC60

CV 12V DC 5 Watt

SLED-EC5
- 89mmL x 45mmW x 23mmH min hole 50mmØ
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 0.5 - 5 Watts
- 4 Sockets

CV 12V DC 15 Watt

SLED-EC15
- 130mmL x 46mmW x 15mmH min hole 48mmØ
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 1-15 Watts
- 12 Sockets

CV 12V DC 30 Watt

SLED-EC30
- 150mmL x 40mmW x 31mmH
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 1-30 Watts
- 4 Sockets

CV 12V DC 60 Watt

SLED-EC60
- 185mmL x 60mmW x 31mmH
- Light Emitting Diode (LED) power supply
- Secondary 12Volts direct current
- 1-60 Watts
- 12 Sockets

AMPLIFIER



SLED-AMP-1C

SLED-AMP-1C
- Voltage drop can occur over a long length of LED run
- Amplifiers allow LED runs to exceed 7 metres with uniform illuminance

DIMMER & EFFECT CONTROLLER



SLED-RDIM

SLED-RDIM
- Remote dimmer and effects controller
- 15 metre range
- 10 Dimming levels
- 8 light effects such as: Fade & Blink modes speed can be decreased or increased on effects

LED DIMMER MODULE

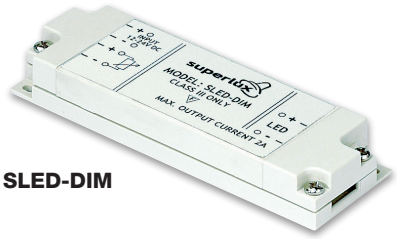

SLED-DIM

SLED-DIM
- Install between the ELV DC power supply and the Superlux DC LED lamps
- Suitable for dimming constant voltage 12/24V DC LED lighting
- Maximum output current 2A
- Use in conjunction with a potentiometer such as clipsal 500k OHM (30 POTFM)

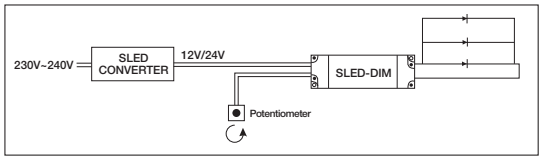

Electronic Ballasts

Metal halide and fluorescent power supplies

METAL HALIDE CONTROL GEAR



SDM-CG35



SDM-CG70



SDM-CG150

- For ceramic and HQI lamps
- ENEC safety certified and AS/NZS61347 tested and compliant
- EMC compliant
- Energy saving of more than 20%
- Extended lamp life
- Simple installation of cable with screwless terminals
- Compact size and light weight
- Short circuit and open circuit protection
- Over heat auto cut-off
- Automatic cut-off in case of defective or missing lamp

SDM-CG35
- 35 Watt
- 175mmL x 77mmW x 30mmH

SDM-CG70
- 70 Watt
- 123mmL x 75mmW x 30mmH

SDM-CG150
- 150 Watt
- 183mmL x 86mmW x 35mmH

FLUORESCENT CONTROL GEAR

BAL-T818
BAL-T830
BAL-T836



BAL-T922



BAL-T932

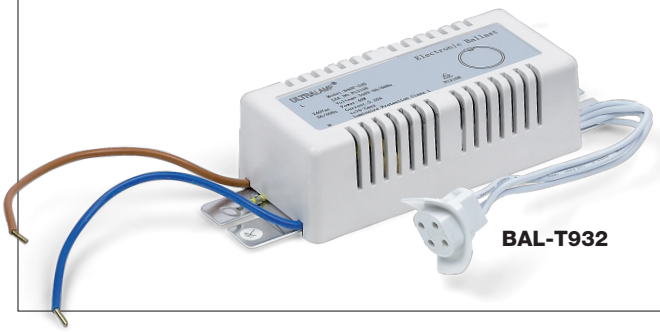

Ballasts for T8 fluorescent
BAL-T818 - 18 Watt
- 200mmL x 26mmW x 20mmH

BAL-T830 - 30 Watt
- 250mmL x 26mmW x 20mmH

BAL-T836 - 36 Watt
- 250mmL x 26mmW x 20mmH

Ballasts for circular fluorescent
BAL-T922 - 22 Watt
- 138mmL x 32mmW x 32mmH

BAL-T932 - 32 Watt
- 140mmL x 48mmW x 35mmH

Electronic Transformers

12Volt AC high frequency power supply

- All electronic transformers are laboratory tested in NZ and have electrical safety approval numbers
- Extra low voltage connections must be tight to avoid creation of excessive loads on transformers
- To reduce the effects of RFI ensure that the primary and secondary wires do not cross over each other
- If a dimmer is to be used ensure that it is a type that is recommended for use with an electronic transformer

CV 12V AC

ELECTRONIC DIMMABLE



SVE-T50
1-50 Watts
100 nanofarads

SVE-T50
- 1-50 Watts
- 119mmL x 52mmW x 35mmH
- Fits through opening 65mmØ



SVE-T80
20-80 Watts

SVE-T80
- 20-80 Watts
- 150mmL x 50mmW x 20mmH
- Thermal switch and overload protection with auto-reset

Magnetic Transformers

12Volt AC inductive power supply

- 50 Hz • Premium quality Magnetic - Inductive
- Suits feed to 12V garden cable SPT-3-15 or SPT-3-30 • IP44 protection
- Dimmable with switch recommended for magnetic transformers

IP 44 CV 12V AC

IP44 WEATHERPROOF TRANSFORMERS



GV-T60

GV-T60
- 60 Watts
- 5amps
- 65mm x 75mm x 87mm

LED Drivers 12V Constant Voltage

12Volt DC power supplies and controllers

LED POWER SUPPLIES



SLED-EC15

CV 12V DC 15 Watt



SLED-EC20

CV 12V DC 20 Watt

SLED-EC15
- 130mmL x 46mmW x 15mmH min hole 48mmØ
- LED power supply
- Secondary 12 Volts direct current
- 1-15 Watts
- 12 Sockets

SLED-EC20
- 67mmØ x 20mmH
- LED power supply
- Secondary 12 Volts direct current
- 1-20 Watts

IP66 POWER SUPPLIES

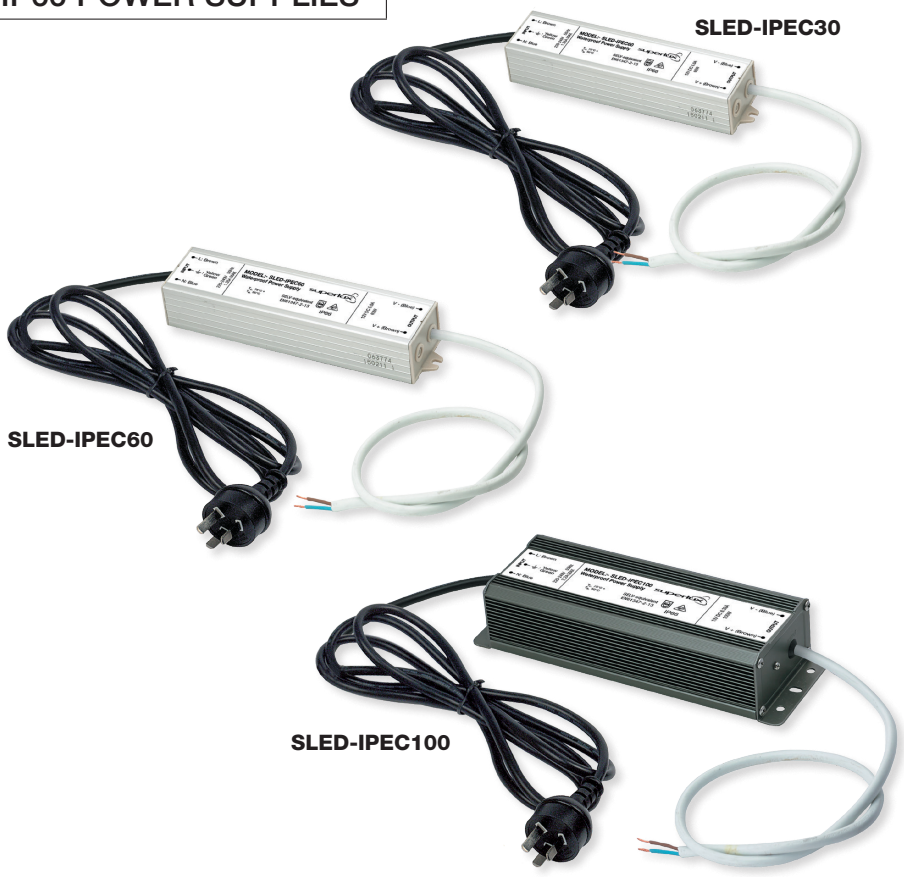

CV 12V DC 30 Watt IP 66

SLED-IPEC30
- Ideal for LED outdoor applications
- Maximum halogen load 30 Watts
- 150mmL x 40mmW x 24mmH
- 2.5A

CV 12V DC 60 Watt IP 66

SLED-IPEC60
- Ideal for LED outdoor applications
- Maximum halogen load 40 Watts
- 180mmL x 42mmW x 32mmH
- 5A

CV 12V DC 100 Watt IP 66

SLED-IPEC100
- Ideal for LED outdoor applications
- Maximum halogen load 80 Watts
- 212mmL x 72mmW x 47mmH
- 8.33A

Door Chime

Mains voltage installation



BC-M-WH



BC-M-WH



BP-BL BP-S

(purchase separately)



BP-BL BP-S

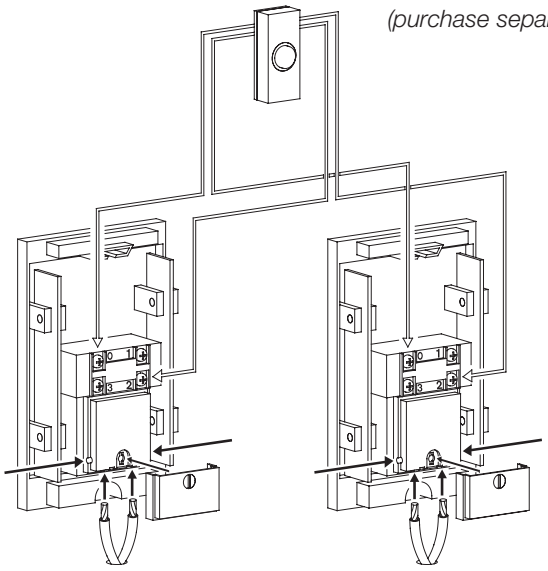

Example of how to wire 1x bell push to 2 x chimes

220V-240V

BC-M-WH

Mains powered bell chime

- Built-in transformer, 8Volt output for bell push
- Bell push ordered separately
- One ring chime sound
- 165mmH x 100mmW x 45mmD
- Bell chime “Ding Dong” sound 80 decibels at 1 metre

BP

Bell push

- Enclosed back
- 25mmW x 50mmH x 21mmD
- Available in white or black

Electrical Products

Quality product designed in New Zealand

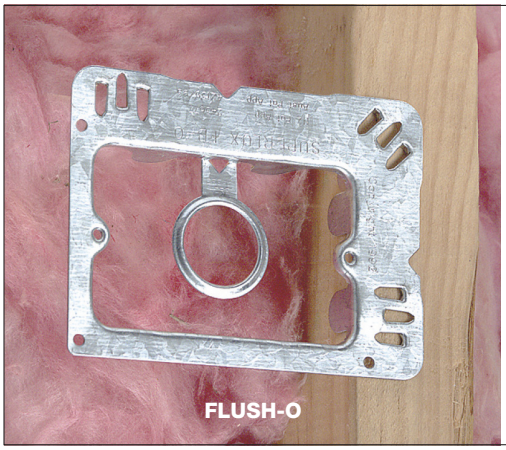

FLUSH-O



FLUSH-O

FLUSH-O

- Open back flush box
- Pre-nailed
- Very quick and accurate installation
- Optional screw fixing
- For both vertical and horizontal installation
- Economical
- 120mmL x 87mmW
- Opening 86mmL x 53mmW

Mains Voltage LED Lamps

Replaces traditional technology lamps

35° BEAM ANGLE



PAR30-LED-WW

E27 | 220V-240V | 11 Watt

PAR30-LED-WW

- 3,000K warm white
- Glass construction
- Bridgelux LED chip
- 94mmØ X 95mmH
- 900 lumens
- Indoor use only
- Triac Dimmable
- CRI 80



40° BEAM ANGLE



PAR38-15WLED-DL

E27 | 220V-240V | 15 Watt | IP 65

PAR38-15WLED-DL

- 5,000K day light
- 125mmØ X 134mmL
- 1200 lumens
- Indoor and Outdoor use
- Triac Dimmable
- CRI 80



40° BEAM ANGLE



PAR38-15WLED-WW

E27 | 220V-240V | 15 Watt | IP 65

PAR38-15WLED-WW

- 3,000K day light
- 125mmØ X 134mmL
- 1200 lumens
- Indoor and Outdoor use
- Triac Dimmable
- CRI 80



Mains Voltage LED Lamps

Replaces traditional technology lamps

GLS STANDARD



GLSD-6BWW

B22 | 220V-240V | 6 Watt

GLSD-6BWW
- Triac Dimmable
- 3,000K warm white
- 58mmØ
- 111mm overall length
- 270° degree beam angle
- CRI 81
- 450 lumens
- Aluminium



GLSW-8EWW

E27 | 220V-240V | 8 Watt

GLSW-8EWW
- 3,000K warm white
- Filament LED lamp
- 60mmØ
- 98mm overall length
- 270° degree beam angle
- CRI 80
- 1055 lumens



GLS-9EWW

E27 | 220V-240V | 9 Watt

GLS-9EWW
- 3,000K warm white
- 60mmØ
- 110mm overall length
- 240° degree beam angle
- CRI 80
- 820 lumens



GLSD-8EWW

E27 | 220V-240V | 8 Watt

GLSD-8EWW
- Triac Dimmable
- Resin encapsulated for extra durability & lamp life
- 3,000K warm white
- 60mmØ
- 120mm overall length
- 240° degree beam angle
- CRI 80
- 840 lumens



GLSD-8ECW

E27 | 220V-240V | 8 Watt

GLSD-8ECW
- Triac Dimmable
- Resin encapsulated for extra durability & lamp life
- 4,000K warm white
- 60mmØ
- 120mm overall length
- 240° degree beam angle
- CRI 80
- 840 lumens

SMALL GLOBES



SMR-5EWW

E27 | 220V-240V | 5 Watt

SMR-5EWW
- 3,000K warm white
- 45mmØ
- 80mm overall length
- 210° beam angle
- CRI 80
- 400 lumens



SMR-5BWW

B22 | 220V-240V | 5 Watt

SMR-5BWW
- 3,000K warm white
- 50mmØ
- 90mm overall length
- 210° beam angle
- CRI 80
- 425 lumens

R80 LAMP



R80D-12EWW

E27 | 220V-240V | 12 Watt

R80D-12EWW
- Triac Dimmable
- 3,000K warm white
- 80mmØ
- 114mm overall length
- 120° degree beam angle
- CRI 80
- 900 lumens

SLIM FIT



SBL-8EWW

E27 | 220V-240V | 8 Watt

SBL-8EWW
- 3,000K warm white
- 38mmØ
- 115mm overall length
- 280° degree beam angle
- CRI 80
- 800 lumens

Mains Voltage LED Lamps

Replaces traditional technology lamps

LARGE GLOBES



GLOBD-12EWW

Dimmable



GLOBD-12BWW

E27 | 220V-240V | 12 Watt

GLOBD-12EWW
- 3,000K warm white
- Dimmable 100%-25%
- Triac Dimmable
- 95mmØ
- 140mm overall length
- 300º beam angle
- CRI 80
- 1200 lumens

B22 | 220V-240V | 12 Watt

GLOBD-12BWW
- 3,000K warm white
- 95mmØ
- 140mm overall length
- 300º beam angle
- CRI 80
- 1200 lumens
- Triac Dimmable

HIGH WATTAGE



SBL-18EDL
SBL-18EWW

E27 | 220V-240V | 18 Watt

SBL-18EDL
(6,000K, 1870 lm)
SBL-18EWW
(3,000K, 1730 lm)
- 160° beam angle
- 80mmØ x 140mm overall length
- Plastic cover, aluminium construction



SBL-28EDL
SBL-28EWW

E27 | 220V-240V | 28 Watt

SBL-28EDL
(6,000K, 2600 lm)
SBL-28EWW
(3,000K, 2420 lm)
- 160° beam angle
- 100mmØ x 180mm overall length
- Plastic cover, aluminium construction



GLOBW-8E95

E27 | 220V-240V | 8 Watt

GLOBW-8E95
- 2,700K warm white
- 95mmØ
- 138mm overall length
- 360º beam angle
- CRI 90
- 640 lumens



GLOB-8E95

E27 | 220V-240V | 8 Watt

GLOB-8E95
- 2,700K warm white
- 95mmØ
- 138mm overall length
- 360º beam angle
- CRI 90
- 640 lumens

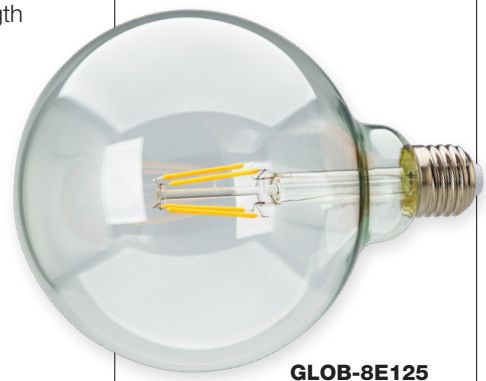

GLOB-8E125

E27 | 220V-240V | 8 Watt

GLOB-8E125
- 2,700K warm white
- 125mmØ
- 180mm overall length
- 360º beam angle
- CRI 90
- 640 lumens

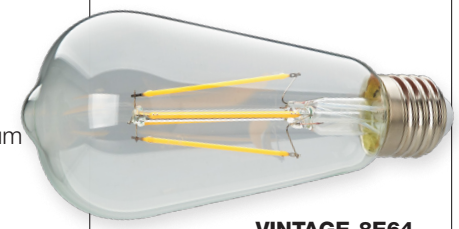

VINTAGE-8E64

E27 | 220V-240V | 8 Watt

VINTAGE-8E64
- 2,700K warm white
- 64mmØ
- 145mm overall length
- 360º beam angle
- CRI 90
- 640 lumens



TTUBE-4EWW

E27 | 220V-240V | 4 Watt

TTUBE-4EWW
Test Tube bulb
- 2,700K warm white
- 30mmØ
- 180mm overall length
- 360º beam angle
- CRI 80
- 380 lumens
- Amber tinted glass

Mains Voltage LED Lamps

Replaces traditional technology lamps



GU10-HPLED-WH

GU 10 | 220V-240V | 6 Watt

GU10-HPLED-WH
- 3,000K warm white
- 100 lux at 2.4metres
- 50mmØ
- 520 lumens
- 38° beam



GU10D-HPLED-CW

GU 10 | 220V-240V | 5 Watt

GU10D-HPLED-CW
- 4,000K neutral white
- 80 lux at 2.4metres
- 50mmØ
- 375 lumens
- 38° beam
- Dimmable



GU10-WBLED-WW

GU 10 | 220V-240V | 6 Watt

GU10-WBLED-WW
- 3,000K warm white
- 210 lux at 2.4metres
- 50mmØ
- 510 lumens
- 38° beam



GU10D-NBLED-WW

GU 10 | 220V-240V | 6.5 Watt

GU10D-NBLED-WW
- 2,700K warm white
- 270 lux at 2.4metres
- 50mmØ
- 580 lumens
- Magnesium die-casted
- See colour truer to life CRI90
- 24° beam
- Standard GU10 length
- Triac dimmable



GU10-LED-WH

GU 10 | 220V-240V | 1 Watt

GU10-LED-WH
- 4,000K natural white
- 40 lux at 2.4metres
- 50mmØ
- 51 lumens
- 15° beam

COLOURED LED



GU10-HPLED-BE

GU 10 | 220V-240V | 3 Watt

GU10-HPLED-BE
- Blue
- 1000 lux at 1metre
- 50mmØ X 53mmH
- 30° Beam



GU10-HPLED-GN

GU 10 | 220V-240V | 6 Watt

GU10-HPLED-GN
- Green
- 550 lux at 1metre
- 48mmØ X 51mmH
- 38° Beam

G9 LED



G9-3WLED-WW

G9 | 220V-240V | 3 Watt

G9-3WLED-WW
- 3,000K warm white
- 50mmH x 17mmØ
- 360° multi directional light effect
- 350 lumens

Mains Voltage LED Lamps

Replaces traditional technology lamps

CANDLE LED LAMPS



CANP-4BWW

B22 | 220V-240V | 4 Watt

- 3,000K warm white
- 37mmØ
- 100mm overall length
- 210° degree beam angle
- CRI 80
- 280 lumens



CANP-4SEWW

E14 | 220V-240V | 4 Watt

- 3,000K warm white
- 37mmØ
- 106mm overall length
- 210° degree beam angle
- CRI 80
- 280 lumens

NEW



CANC-4SEWW

E14 | 220V-240V | 4 Watt

- 3,000K warm white
- 35mmØ
- 98mm overall length
- 270° degree beam angle
- CRI 80
- 440 lumens

NEW



CANC-4BWW

B22 | 220V-240V | 4 Watt

- 3,000K warm white
- 35mmØ
- 92mm overall length
- 270° degree beam angle
- CRI 80
- 440 lumens



CANC-3EWW

E27 | 220V-240V | 3 Watt

- 3,000K warm white
- 35mmØ
- 92mm overall length
- 270° degree beam angle
- CRI 80
- 300 lumens

S14s LED LAMPS



S14S | 220V-240V | 5 Watt

TUBE300-LEDWW

- 2700K warm white
- 300mmL
- 520 lumens
- CRI 84
- 270° beam angle
- Non-dimmable

S14S | 220V-240V | 8 Watt

TUBE500-LEDWW

- 2700K warm white
- 500mmL
- 780 lumens
- CRI 84
- 270° beam angle
- Non-dimmable

DIRECTIONAL LINEAR



LIN78-6WLED-CW

R7s 78 | 220V-240V | 6 Watt

- 4,000K natural white
- 78mmL x 58mmH x 32mmD
- 600 lumens
- Similar light effect to a 60 Watt halogen

LINEAR LED LAMPS

NEW



LEDLIN78-6



LEDLIN118-12

Note: lamp will initially flicker until stabilised

R7s 78 | 6 Watt

LEDLIN78-6

- 78mmL x 16mmØ
- 3,000K warm white
- 360° beam angle
- CRI 80
- 600 lumens
- Not suitable to install on circuits with electronics or dimmers

R7s 118 | 12 Watt

LEDLIN118-12

- 118mmL x 16mmØ
- 3,000K warm white
- 360° beam angle
- CRI 80
- 1000 lumens
- Not suitable to install on circuits with electronics or dimmers

12V LED Lamps

Extreme Energy Efficiency
• Replaces halogen lamps • Constant voltage • 12Volt AC/DC, CCG, or ECG

LED

EXTRA LOW VOLTAGE

12V-24V



ELV-12EWW

E27 | 12V-24V | 12 Watt

ELV-12EWW
- 3,000K warm white
- 60mmØ
- 121mm overall length
- 200° beam angle
- CRI 80
- 1120 lumens
- **12Volt- 24Volt use Only**

Ideal to use with decorative lanterns where a 12V or 24V power suppy is available.

MR11 30° BEAM



MR11-HPLED-WH

MR11 | G 4.0 | CV 12V | 2 Watt

MR11-HPLED-WH
- 35mmØ
- 3,000K warm white
- 520 lux at 1metre
- 150 lumens

3 WATT CAPSULE



CAP-3WLED-WW

G 4.0 | 3 Watt | CV 12V

CAP-3WLED-WW
- 3,000K warm white
- 10mmØ
- 38mm overall length
- 360° beam angle
- CRI 80
- 180 lumens

- 12Volt LED lamps are compatible with most types of halogen transformers, best results with lower wattage transformers
- Some single lamp installations are not best supplied by AC, ECG
- Not suitable for some boat and motor home installations

12V LED Reflector Lamps

Extreme Energy Efficiency
• Replaces halogen lamps • Constant voltage • 12Volt AC/DC, CCG, or ECG

LED

26° BEAM



MR16-NBLED-WW

MR16 | CV 12V | 5 Watt | G 5.3

MR16-NBLED-WW
- 3,000K warm white
- 212 lux at 2.4metres
- 50mmØ
- 425 lumens
- CRI80

40° BEAM



MR16-8WLED-WW

MR16 | CV 12V | 8 Watt | G 5.3

MR16-8WLED-WW
- 3,000K warm white
- 50mmØ
- 130 lux at 2.4metres
- 4mm longer than a standard MR16 lamp
- 660 lumens
- Not recommended for use in enclosed fixtures

38° BEAM NEUTRAL WHITE

NEW 4,000K



MR16-HPLED-CW

MR16 | CV 12V | 5 Watt | G 5.3

MR16-HPLED-CW
- 4,000K neutral white
- 80 lux at 2.4metres
- 50mmØ
- Overall length 48mm
- 350 lumens
- CRI80

36° BEAM

DIMMABLE CRI90



MR16D-WBLED-WW

MR16 | CV 12V | 6.5 Watt | G 5.3

MR16D-WBLED-WW
- 3,000K warm white
- 50mmØ
- 186 lux at 2.4metres
- 580 lumens
- Colour truer to life CRI90
- Standard MR16 length
- Triac dimmable

38° BEAM WARM WHITE

NEW 3,000K



MR16-HPLED-WW

MR16 | CV 12V | 5 Watt | G 5.3

MR16-HPLED-WW
- 3,000K warm white
- 80 lux at 2.4metres
- 50mmØ
- Overall length 48mm
- 350 lumens
- CRI80

COLOURED LED



MR16-HPLED-GN

MR16 | CV 12V | 3 Watt | G 5.3

MR16-HPLED-GN
- Green
- 165 lux at 1metre
- 50mmØ
- 45° beam



MR16-HPLED-BE

MR16 | CV 12V | 3 Watt | G 5.3

MR16-HPLED-BE
- Blue
- 210 lux at 1metre
- 50mmØ
- 45° beam

- 12Volt LED lamps are compatible with most types of halogen transformers, best results with lower wattage transformers.
- Some single lamp installations are not best supplied by AC, ECG
- Not suitable for some boat and motor home installations

Halogen Lamps & Tubes

Halogen 100% colour rendering

10 lm/W

LINEAR HALOGEN MAINS VOLTAGE



HLIN118-150
HLIN118-300
HLIN118-500



HLIN78-100
HLIN78-150

R7s | 150 Watt | 300 Watt | 500 Watt

HLIN118-150
HLIN118-300
HLIN-118-500
- Halogen linear lamp, 240V ,118mm

R7s | 100 Watt | 150 Watt **1500 HOURS LIFE**

HLIN-78-100
HLIN-78-150
- Halogen linear lamp, 240V halogen,78mm

HALOGEN CAPSULES 12V



HCAP20
HCAP35
HCAP50
HCAP75

G 4.0 | 20 Watt

HCAP20 (20 Watt)

G 5.3 | 35 Watt | 50 Watt | 75 Watt

HCAP35 (35 Watt)
HCAP50 (50 Watt)
HCAP75 (75 Watt)
- 12V halogen capsule 3,000 hours life

HALOGEN CAPSULES MAINS VOLTAGE



G9-25F
G9-40F

G9 | 25W | 40 Watt

G9-25F (frosted 25 Watt)
G9-40F (frosted 40 Watt)
- 1500 hours life

LAMP HOLDERS



SV-GU5.3



SV-GU-TCO

NEW



LS-E27

G 4.0 | G 5.3 | G 6.35 | 12V

SV-GU5.3
Supplied with 250mm silicone leads
- GU 12V halogen lamp holder

SV-GU-TCO
- GU 12V lampholder with TCO thermal cut off included, for SVE-KIT SETS
- 550mm silicone leads

E27 | 220V-240V

LS-E27
- E27 lamp holder
- Suits equipoise BZ and hospital equipoise

Halogen Reflector Lamps

Halogen 100% colour rendering

10 lm/W

ALUMINISED MAINS VOLTAGE





2,500
Hours life

50 Watt | 36° | 220V-240V

GU10-50-A
• Aluminised, 50mmØ

35 Watt | 36° | 220V-240V

GU10-35-A
• Aluminised, 50mmØ

DICHROIC 12V



G 5.3 | 38° | 20 Watt | 35 Watt | 50 Watt | 12V

DICHROIC
MR16-50-D38 (50W)
MR16-35-D38 (35W)
MR16-20-D38 (20W)
• 50mmØ

ALUMINISED 12V





G 5.3 | 50 Watt | 38° | 12V

Long life with cover glass

ALUMINISED
MR16-50-A38
• 50mmØ

G 4.0 | 20 Watt | 20° | 12V

ALUMINISED
MR11-20-A20
• 35mmØ

Compact Fluorescent Lamps

Long life lamps

68 lm/W

2 PIN



PL-7CW



PL-9CW



PL-11CW

PL 2 PIN | 7 Watt | G23

PL-7CW
- 4,000K cool white
- Overall length 134mmL 31mmW

PL 2 PIN | 9 Watt | G23

PL-9CW
- 4,000K cool white
- Overall length 166mmL 31mmW

PL 2 PIN | 11 Watt | G23

PL-11CW
- 4,000K cool white
- Overall length 235mmL 31mmW

4 PIN



PLCQ-18WW

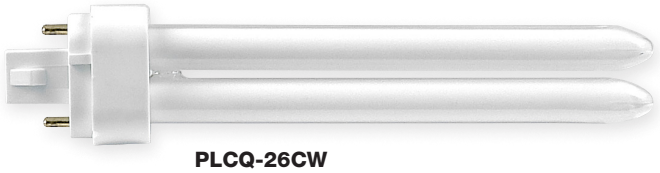

PLCQ-26CW

PL-C 4 PIN | 18 Watt | G24 q-2

PLCQ-18WW
- 2,700K warm white
- Overall length 146mmL 34mmW

PL-C 4 PIN | 26 Watt | G24 q-3

PLCQ-26CW
- 4,000K cool white
- Overall length 160mmL 34mmW

Fluorescent Lamps & Tubes

Energy saving long life lamps
- Lengths stated exclude pins

T5 MINIATURE FLUORESCENT LAMPS

84 lm/W

T5

SFT5-DL13 13 Watt Daylight (6,400K) 518mm

SFT5-WW14 14 Watt Warm White (3,000K) 549mm

SFT5-GN21 21 Watt Green 848mm



SFT5-DL21 21 Watt Daylight (6,400K) 848mm



SFT5-BLB21 21 Watt Blacklight Blue 848mm



21 Watt Blacklight

SFT5-DL28 28 Watt Daylight (6,400K) 1148mm

SFT4 MINIATURE FLUORESCENT LAMPS

T4

Wattages to match SFT4 series fittings

84 lm/W

SFT4-BE6 6 Watt Blue



SFT4-GN6 6 Watt Green



SFT4-RD6 6 Watt Red



SFT4-BE20 20 Watt Blue



SFT4-GN20 20 Watt Green



SFT4-RD20 20 Watt Red



SFM-T4 MINIATURE FLUORESCENT LAMPS

Wattages to match SFM series fittings

84 lm/W

SFM-T4-10-WW 10 Watt Warm White (3,450K) 292mm



SFM-T4-18-GN 18 Watt Green 470mm



CIRCULAR LAMPS

55 lm/W

T9

CIR10-40-TP x 10 Qty

CIR10-40-WW x 10 Qty

CIR-40-TP x 1
40 Watt Triphos
5,000K
daylight
400mmØ

CIR-40-WW x 1
40 Watt Triphos
3,500K
warm white
400mmØ

CIR20-32-TP x 20 Qty

CIR20-32-WW x 20 Qty

CIR-32-TP x 1 Qty
32 Watt Triphos
5,000K
daylight
300mmØ

CIR-32-WW x 1 Qty
32 Watt Triphos
3,500K
warm white
300mmØ

CIR20-22-WW x 20 Qty

CIR-22-WW x 1 Qty
22 Watt Triphos
3,500K warm white
210mmØ

PRODUCT	PAGE
720-LED24	44
725-12	44
727-12-SC	46
727-14-SC	46
777-12	43
787-14	46
AU14380	18
AU1533-CC	18
AU1533-CC-1	18
AU2111-CC	18
AU2112-CC	18
AU2812-RU	18
AU2813-RU	18
AU3573-CC	18
AU5430-AB	18
AU5430-CC	18
AU5430-SS	18
AU5481-GO	18
AU5481-SI	18
AU700186	18
AU700187	18
AU700405	18
AU8021-BK	18
AU8022-BK	18
AU8082-GY	18
AU8082-SS	18
BAFFLE-BL	38
BAFFLE-WH	38
BAL-T818	233
BAL-T830	233
BAL-T836	233
BAL-T922	233
BAL-T932	233
BB6-WH	134
BC-M-WH	236
BP-BL	236
BP-S	236
BZ-FLANGE	202
BZL-104L-BL	189
BZ-POLE1-BL	202
BZ-POLE2-BL	202
BZ-POLE60-1BL	203
BZ-POLE60-2BL	203
BZ-POLE60-3BL	203
C2942-BL	163
C3005-BL	145
C3005-WH	145
C3009-BL	145
C3009-WH	145
C4025L-BL	181
CAGE376	192, 202
CANC-3EWW	241
CANC-4BWW	241
CANC-4SEWW	241
CANP-4BWW	241
CANP-4SEWW	241
CAP25	230
CAP-3WLED-WW	242
CENT10	24
CENT10-CAGE	24
CGE-AB	117
CGE-BL	117
CGE-CO	117
CGE-SC	117
CGH-1P-BL	135, 141
CGH-1P-BS	135, 141
CGH-1P-CH	135, 141
CGH-1P-WH	135, 141
CGK-BL	133, 141
CGM-1P-SC	135, 141
CGS-BL	134, 141
CGS-CH	134, 141
CHAN-BL	141
CH-DATA-BL	12
CH-STD-IV	12
CIR10-40-TP	247
CIR10-40-WW	247
CIR20-22-WW	247
CIR20-32-TP	247
CIR20-32-WW	247
CIR-22-WW	247
CIR-32-TP	247
CIR-32-WW	247
CIR-40-TP	247
CIR-40-WW	247
CL2003-2	49
CL2005-2	49
CL2005-3	49
CL2021	47
CL2022	47
CL2030-1	49
CL205-12	45
CL205-24	45
CL207-12	45
CL207-24	45
CL2257-CH	48
CL420-24	47
CL420-36	47
CL430-SEN-WH	49
CL5003-8	48
CL8607-AB	106
CL8607-SC	106
CLL2171-CH	48
CLL8508-BS	50
CLL8508-SC	50
CLS8508-BS	50
CLS8508-SC	50
CLS8536-SC	50
CLS8536-WH	50
CLU200-CW	42
CLU250-DCW	42
CLU250-DWW	42
CLU250-SCW	42
CLU300-D3CCT	43
CLY326-WH	44
CORD-2C-TR	141
CP1029	126
CP1041-1P-CH	118
CP1041-5P-CH	118
CP110-CH	116
CP12483-BL	106
CP12483-GO	106
CP200-SC	126
CP2012-CH	130
CP2176-SC	122
CP226-L	119
CP226-R6	119
CP2484-BL	106
CP2484-GO	106
CP5020-20P	119
CP576-DB	96
CP7156-WH	122
CP8317-CH	120
CR2127-1P	122
CR4257-7P	122
CR4803-CH	120
CR5172-2B	124
CR5742	123
CRC-HALE-18P	124
CRC-HALE-2B	124
CRI-CASA-5P	125
CRI-CASA-9P	125
CRI-SPIR-2M	125
CRY-HALE-5P	124
D309-CL	200
D328-CL	200
D409-WH	200
D412-WH	201
D414-WH	201
D416-WH	201
D428-WH	200
D88065-WH	201
DFA-14	54
DFA-28	54
DFL-8	54
DFL-14	54
DFL-21	54
DFS-14	54
DFS-28	54
DFS-8	54
DFT-8	54
DFT-14	54
DFT-21	54
DF-WIRE	140
DLA-8	55
DLA-12	55
DLR-5	55
DLS-12	55
DLT-8	55
DLW-8-BL	52
DLW-8-GD	52
DLW-8-WH	52
DLW-12-BL	52
DLW-12-GD	52
DLW-12-WH	52
DLW-18-BL	52
DLW-18-WH	52
DLX-12-BL	53
DLX-12-CH	53
DLX-12-WH	53
DU10730-BL	190
DU324	190, 203
DU4510-BZ	186
DU5710-SI	186
DU6002-BZ	186
DU83023-BL	190
DUAW9002-BL	175
DUAW9005-GM	175
DUB80-BL	184
DUB80-SI	184
DUBMS80-BL	184
DUBMS80-SI	184
DUB-REF-BL	184
DUB-REF-SI	184
DUF80-BL	185
DUH377-BR	168
DUH8302-BL	169
DUP377-BR	168
DUP7010-BL	170
DUP7025-BL	171
DUP7030-BL	170
DUT1107-OP	199
DUT6002-BZ	186
DUT7025-BL	171
DUT8302-BL	169
DUW2000-SI	186
DUW377-BR	168
DUW4000-SI	186
DUW5028-BL	191
DUW577-BL	169
DUW700-WH	173
DUW7010-BL	170
DUW7016-BL	169
DUW7025-BL	171
DUW7030-BL	170
DUW8100-BL	173
DUW8100-WH	173
DUW8270-BL	158
DUW8270-SI	158
DUW8273-BL	158
DUW8273-SI	158
DUW8302-BL	169
ELV-12EWW	242
EXT25	230
EXT25-DIF1	230
F1016	185
F1051-BL	180
F1051-SS	180
F1060-SI	174
F1062	185
F1068	195
F1081-BL	189
F1303	199
F1305	199
F1600	195
F1642-SB	172
F240-GR	191
F259L-BL	174
F3291-BL	172
F3356-BL	175
F3398-BL	175
F5301L-BL	185
F587	197, 203
F6000-SM	196
F6000-WH	196
F6001-SM	196
F6001-WH	196
F6002-SM	196
F6002-WH	196
F6003-SM	196
F6003-WH	196
F6004-SM	196
F6004-WH	196
F60382-PED	194
F60382-R5	194
F60382-R8	194
F60382-SYM	194
F6601-SI	143
F6601-WH	143
F6602-WH	143
F6603-WH	143
F7060-SI	174
FB1060	194
FB1461	198,203
FB1480	203
FB1490	203
FB3003	203
FB5601	202,203
FB6931	203
FB6933	203
FLED29-BL	17
FLED29-WH	17
FLED36-BL	19
FLED36-WH	19
FLED6002-SM	199
FLED6002-WH	199
FLED6003-WH	199
FLUSH-O	236
FLX-250	140
FS124	180
FS2103	180
FS2168	178
FS21-GY	91
FS21-MM	91
FS410-BL	139
FS4997	178
FS6-DG	139
FS6-GY	139
FS6-IV	139
FS6-NA	139
FS6-PL	139
FS7502-BL	172
FSDS52	178
FSS52	178
G9-25F	244
G9-3WLED-WW	240
G9-40F	244
GD9106-SS	165
GD9130-SS	165
GD9136-SS	165
GJ2101	166
GJ2143	167
GJ2201	166
GJ2213-BL	166
GJ2213-SI	166
GJ2213-WH	166
GJ2214-BL	166
GJ2214-SI	166
GJ2215-BL	166
GJ2215-SI	166
GJ2216-BL	166
GJ2216-SI	166
GJ2217-BL	166
GJ2217-SI	166
GJ2241	167

PRODUCT	PAGE
GJ2263-BL	167
GJ2263-SI	167
GJ2263-WH	167
GJ2264-BL	167
GJ2264-SI	167
GJ2265-BL	167
GJ2265-SI	167
GJ2266-BL	167
GJ2266-SI	167
GJ2267-BL	167
GJ2267-SI	167
GK8190-SI	165
GK8690-SI	165
GK8695-SI	165
GK8790-SI	165
GK8890-SI	165
GLOB-8E125	239
GLOB-8E95	239
GLOBD-12BWW	239
GLOBD-12EWW	239
GLOBW-8E95	239
GLS-9EWW	238
GLSD-6BWW	238
GLSD-8ECW	238
GLSD-8EWW	238
GLSW-8EWW	238
GS-03	77
GT4631-SI	222
GT4633-BL	222
GT4633-SI	222
GT5080-BL	164
GT5080-SI	164
GT5223-BL	164
GT5608-BL	164
GT5608-SI	164
GT5614-BL	164
GT5621-BL	164
GT5621-SI	164
GT5627-BL	164
GT5627-SI	164
GT5638-BL	164
GU10-35-A	245
GU10-50-A	245
GU10D-HPLED-CW	240
GU10D-NBLED-WW	240
GU10-HPLED-BE	240
GU10-HPLED-GN	240
GU10-HPLED-WH	240
GU10-LED-WH	240
GU10-WBLED-WW	240
GV-T60	234
HCAP20	244
HCAP35	244
HCAP50	244
HCAP75	244
HLIN118-150	244
HLIN118-300	244
HLIN118-500	244
HLIN78-100	244
HLIN78-150	244
HOL5-LED-BB	51
HOL5-LED-WH	51
HPGU-1P-SC	126
JT13-512PE	215
JT23-6MM	214
JT24-512F	215
JT33-495F	215
JT33-4MM	214
JT35-517F	215
K150-WH	220
K500-WH	220
KDU15-BL	219
KL10-BL	219
KN20-BL	219
KP150-BL	221
KP300-BL	221
KPDS300-BL	221
KR50-SI	223
KS150-WH	220
KS200-BL	220
KS200-SI	220
KSL210-BL	219
KSL5-BL	219
KSR10-SI	223
L200	226
L238	152
L260	154
L564	39
L566	226
LDE90-BL	29
LDE90-GD	29
LDE90-SC	29
LDE90-WH	29
LDE90-LFL-WH	29
LDE90S-BL	28
LDE90S-GD	28
LDE90S-SC	28
LDE90S-WH	28
LDL125-WH	33
LDL160-WH	33
LDL175-WH	33
LDLB90-BL	40
LDLB90-GD	40
LDLB90-SC	40
LDLB90-WH	40
LDLB90-FIRE60	40
LDLB90S-GD	41
LDLB90S-SC	41
LDLB90S-WH	41
LDL-GIM1-SI	26
LDL-GIM1-WH	26
LDL-GIM2-SI	26
LDL-GIM2-WH	26
LDL-GIM3-SI	26
LDL-GIM3-WH	26
LDL-GIM4-SI	26
LDL-GIM4-WH	26
LDL-IP65-SI	36
LDL-IP65-WH	36
LDL-PLATE1-BL	27
LDL-PLATE1-GD	27
LDL-PLATE1-WH	27
LDL-PLATE2-BL	27
LDL-PLATE2-GD	27
LDL-PLATE2-WH	27
LDL-PLATE3-BL	27
LDL-PLATE3-GD	27
LDL-PLATE3-WH	27
LDL-PLATE4-BL	27
LDL-PLATE4-WH	27
LDLS115-BL	31
LDLS115-WH	31
LDLS120-BL	32
LDLS120-WH	32
LDLS-REF-GD	31
LDLS-REF-SI	31
LDLS-REF-WH	31
LDL-TLT-BL	27
LDL-TLT-GD	27
LDL-TLT-WH	27
LDU150-WH	34
LDU200-WH	34
LDUGR150-WH	35
LDUGR200-WH	35
LDUGR90-BL	30
LDUGR90-WH	30
LEDLIN118-12	241
LEDLIN78-6	241
LENS-207L	138
LENS-207S	138
LENS-LJ5000	139
LENS-LJ5050	139
LENS-LJ6000	139
LENS-LJ6050	139
LG201-BL	176
LG201-SS	176
LG202-SS	176
LG203-BL	176
LG203-SS	176
LG2182-SS	180
LG220-SS	176
LG8072-SS	178
LGS7008-BL	181
LGX53-R2-SG	172
LGX53-S2-SG	172
LH1701-BL	161
LH1701-WH	161
LH2300-BL	161
LH2300-WH	161
LH2845-CC	161
LH2850-CC	183
LH300-CC	183
LH3010-CC	183
LH4901-BL	179
LH5001-BL	179
LH5101-BL	179
LH5980-CC	181
LH7950-CC	183
LHG1580-BL	183
LHS5870-CC	181
LIN78-6WLED-CW	241
LJ1001-BL	162
LJ2003-BL	162
LJ2003-WH	162
LJ2026-BL	160
LJ2026-WH	160
LJ2080-BL	162
LJ2080-WH	162
LJ2081-CC	163
LJ6000-CON	152, 154
LJ6001-BL	153
LJ6001-CO	153
LJ6001-GR	153
LJ6001-SG	153
LJ6001-SS	151
LJ6001-WH	153
LJ6002-BL	153
LJ6002-CO	153
LJ6002-GR	153
LJ6002-SG	153
LJ6002-SS	151
LJ6002-WH	153
LJ6003-BL	153
LJ6003-CO	153
LJ6003-GR	153
LJ6003-SG	153
LJ6003-WH	153
LJ6004-BL	153
LJ6004-CO	153
LJ6004-GR	153
LJ6004-SG	153
LJ6004-WH	153
LJ6051-BL	155
LJ6051-SS	155
LJ6051-WH	155
LJ7001-WH	160
LJ7002-BL	160
LJ7003-BL	160
LJL6001-BL	153
LJL6001-CO	153
LJL6001-GR	153
LJL6001-SG	153
LJL6001-SS	151
LJL6001-WH	153
LJL6002-BL	153
LJL6002-CO	153
LJL6002-GR	153
LJL6002-SG	153
LJL6002-SS	151
LJL6002-WH	153
LJL6003-BL	153
LJL6003-CO	153
LJL6003-GR	153
LJL6003-SG	153
LJL6003-WH	153
LJL6004-BL	153
LJL6004-CO	153
LJL6004-GR	153
LJL6004-SG	153
LJL6004-WH	153
LJL6051-BL	155
LJL6051-SS	155
LJL6051-WH	155
LJS6003-BL	153
LJX8830-CC	157
LJY204-BL	160
LK1000	149
LK1001-CC	149
LK1001-SI	149
LK1001-WH	149
LK1200	149
LK1201-CC	149
LK1201-SI	149
LK1201-WH	149
LK1401	148
LK1403	148
LK1441-CC	148, 216
LK1441-SI	148, 216
LK1441-WH	148, 216
LK1443-CC	148,216
LK1443-SI	148,216
LK1443-WH	148,216
LK1501	150
LK1503	150
LK1551-CC	150
LK1551-SI	150
LK1551-WH	150
LK1553-CC	150
LK1553-SI	150
LK1553-WH	150
LK2240	159
LK2241-CC	159
LK2241-SI	159
LK2241-WH	159
LK2300	157
LK2301	147
LK2302	147
LK2303	147
LK2310-CC	157
LK2310-SI	157
LK2310-WH	157
LK2331-CC	147,217
LK2331-SI	147,217
LK2331-WH	147,217
LK2332-CC	147, 217
LK2332-SI	147, 217
LK2332-WH	147, 217
LK2333-CC	147
LK2333-SI	147
LK2333-WH	147
LK3050	156
LK3051-CC	156
LK3051-SI	156
LK3051-WH	156
LK3052-CC	156
LK3052-SI	156
LK3052-WH	156
LK3053-CC	156
LK3053-SI	156
LK3053-WH	156
LK3340	159
LK3341-BL	159
LK3341-WH	159
LKS3050	156
LKV12301	217
LKV12302	217
LKV12401	216
LKV12403	216
LL0011	207
LL0113-CO	218
LL0113-SI	218
LL0123-CO	218
LL0123-SI	218
LL015-BL	213
LL015-SI	213

PRODUCT	PAGE
LL0211-BL	213
LL0211-SI	213
LL030-BL	213
LL030-SI	213
LL0802-BL	208
LL0802-CO	208
LL0802-SI	208
LL0802-SS	208
LL1000	208
LL120-SS	209
LL12-15	209
LL12-30	209
LL20103-SI	142
LL5000-BL	207
LL5010-SS	207
LL6001	209
LL6003	209
LL7531-BL	212
LL8010	208
LL8200	146
LL8201	142, 145
LL9000	213
LLED10006-SS	210
LLED100-LENS	205
LLED1010-BL	208
LLED1010-SG	208
LLED1010-SS	208
LLED1011-SG	208
LLED1012-CO	208
LLED101-BL	205
LLED105-BL	205
LLED1-C1000	204
LLED1-C2000	204
LLED1-C5000	204
LLED1-IPEC20	204
LLED1-IPEC45	204
LLED1-KIT6	204
LLED1-L1	204
LLED1-SC101	205
LLED1-TEE	204
LLED2000-BL	146
LLED2000-WH	146
LLED2002-BL	146
LLED2002-WH	146
LLED20101-CC	145
LLED20101-SI	145
LLED20103-BL	145
LLED20103-WH	145
LLED271-BL	206
LLED3030-CC	218
LLED3030-SI	218
LLED3504-CC	218
LLED3504-SI	218
LLED400-SS	207, 212
LLED401-SS	212
LLED4001-BL	207
LLED4901-BL	207
LLED47111WW	206
LLED521-CO	210
LLED521-SS	210
LLED730-SS	210
LLED731-SS	211
LLED734-SS	211
LLED850-SS	207
LLEDF120-SS	212
LLEDT130-SS	212
LL-T70KIT-BL	213
LL-T70KIT-CO	213
LL-T70KIT-SI	213
LRD76-SI	144
LRL112-BL	143
LRL112-SS	143
LRL112-WH	143
LRL133-SC	142
LSA-BL	12
LSA-WH	12
LSB-BL	12
LSB-WH	12
LSD-WH	23
LS-E27	244
LSG-BL	14
LSG-WH	14
LSH13-231	21
LSH13-269	21
LSH13-363	21
LSH13-505	21
LSH14-228	21
LSH15-450	22
LSH15-451	22
LSH15-473	20
LSH15-758	20
LSH15-993	21
LSH16-110	21
LSL142-BL	223
LSL222-BL	223
LSLC-B2-CH	64
LSLC-B4-CH	64
LSLC-P1-CH	64
LSLN-B3-CH	62
LSLR-B2-SC	66
LSLR-B3-SC	66
LSLR-P1-SC	66
LSLS-B4-WH	63
LSLS-P1-WH	63
LSLS-P3-WH	63
LSLT-B3-CH	65
LSLT-P1-CH	65
LSLT-P4-CH	65
LSLX-B2-BL	61
LSLX-B2-GD	61
LSLX-B2-WH	61
LSLX-B3-BL	61
LSLX-B3-GD	61
LSLX-B3-WH	61
LSLX-P1-BL	61
LSLX-P1-GD	61
LSLX-P1-WH	61
LSM-10-BL	14
LSM-10-WH	13,14
LSM-11-CH	13
LSM-12-CH	13
LSM-14-WH	23
LSM-16-WH	23
LSM-1-BL	13
LSM-1-WH	13
LSM-2-BL	13
LSM-2-WH	13
LSM-3H-BL	13
LSM-3H-WH	13
LSM-4-BL	13
LSM-4-WH	13
LSM-7-BL	13
LSM-7-WH	13
LSM-8-CH	13
LSM-8-HOS	21
LSM-9ROD-BL	13
LSM-9ROD-WH	13
LSP-WH	23
LSS-WH	23
LST-BL	16
LST-WH	16
LSW-BL	92
LSW-BS	92
LSW-WH	92
LSX	15
LSY	15
LV731-SS	211
LV732-SS	211
LX162-CC	177
LX163-CC	177
LX164-CC	177
MAXIM10	25
MR11-20-A20	245
MR11-HPLED-WH	242
MR16-20-D38	245
MR16-35-D38	245
MR16-50-A38	245
MR16-50-D38	245
MR16-8WLED-WW	243
MR16D-WBLED-WW	243
MR16-HPLED-BE	243
MR16-HPLED-CW	243
MR16-HPLED-GN	243
MR16-HPLED-WW	243
MR16-NBLED-WW	243
MS1021-BA	115
MS1053-BA	114
MS125-BL	117
MS125-OR	117
MS125-RD	117
MS125-WH	117
MS150-GY	107
MS190-BL	134
MS190-SC	134
MS190-WH	134
MS20223-GD	108
MS2254-CH	114
MS2400-BLWH	111
MS2400-WHSI	111
MS250-NI	112
MS270-GY	107
MS29020-BA	115
MS29202-BA	115
MS300-LED-SC	114
MS320-BZ	112
MS320-CO	112
MS320-NI	112
MS335-BA	110
MS336-BA	110
MS341-BA	110
MS34202-BA	115
MS349-BA	110
MS350-BZ	112
MS350-NI	112
MS40-WH	114
MS400-BLWH	111
MS400-WHSI	111
MS420-GY	107
MS47402-BA	115
MS500-BLWH	111
MS500-WHSI	111
MS600-BLWH	111
MS600-WHSI	111
MS70357-CO	115
MS70358-CO	115
MS9250-WH	110
MS9411-BLBS	109
MS9412-BLBS	109
MS9413-BLBS	109
MS9450-BL	110
MSB-BB	134
MSB-BL	134
MSB-BS	134
MSB-CH	134
MSB-SC	134
MSC-BB	134
MSC-BL	134
MSC-CO	134
MSC-SC	134
MSC-WH	134
ND100-BL	224
ND100-WH	224
ND180-WH	224
ND360	225
ND463	225
P3008-AB	98
P5551-BB	55
P8005-AB	53
P8005-SC	53
P8008-AB	53
P8008-SC	53
PAR30-LED-WW	237
PAR38-15WLED-DL	237
PAR38-15WLED-WW	237
PD35-WH	90
PD8163-CH	90
PG-1P-AB	141
PG-1P-BL	141
PG-1P-BS	141
PG-1P-CH	141
PL-11CW	246
PL-7CW	246
PL-9CW	246
PLCQ-18WW	246
PLCQ-26WW	246
PS31-BS	90
PS31-WH	90
PVB207-BL	188
PVB300-BL	188
PVB700-BL	188
PVB800-BL	187
PVB850-BL	187
PVB900-BL	187
PVF127-BL	221
PVF130-BL	221
PVP200-BL	192
PVP600-CC	193
PVT200-BL	188
PVT300-BL	188
PVW207-BL	188
Q003	136
Q004	136
Q005	136
Q013	136
Q020	136
Q022	136
Q040	136
Q041	136
Q063	136
Q100	136
Q138	136
Q209	133
Q210	133
Q211	133
Q216	135
Q217	135
Q218	135
Q222	133
Q223	133
Q276	136
Q316	133
Q317	133
Q318	133
Q332	136
Q333	136
Q372	137
Q435	137
Q447	137
Q448	137
Q458	137
Q508	137
Q532-BE	137
Q532-GN	137
Q541-BE	137
Q541-GN	137
Q547-AC	137
Q547-BE	137
Q547-ME	137
Q573-CL	137
Q622	137
Q630	137
Q634	137
Q697	137
Q723	138
Q763	138
Q820-L	138
Q820-M	138
Q820-S	138
Q820-W	138
Q873	138
Q903	138
Q904	138
Q905	138
Q908	138
Q921-BS	140

PRODUCT	PAGE
Q922-BS	140
Q922-CH	140
Q922-WH	140
Q923-BS	140
Q923-WH	140
Q938	138
Q940	140
Q941	140
Q942	140
Q943	140
Q944	140
Q945	140
Q947	140
Q981	138
Q983	138
Q985	138
Q986	138
QC4025	139
QH1011	129
QH1621-AM	131
QH1632-AM	131
QH1632-CL	98
QH1632-SM	98
QH1635-AM	131
QH200	132
QH2123-1	129
QH2149-3S	127
QH2183	129
QH2193-WH	128
QH2198-WH	128
QH290	132
QH3228-AB	93
QH3228-BL	93
QH3228-SC	93
QH3749	131
QH3926	131
QH3993	131
QH400	132
QH4097-BL	128
QH4097-WH	128
QH4277-WH	129
QH4803	128
QH5016	129
QH6311-AC	127
QH6313-AC	127
QH690-BE	126
QH9020	129
QH9171-GO	129
QJ1000	139
QJ1050	139
QJ2000	139
QJ2050	139
QJ2080	139
QJ3000	139
QJ3050	139
R1041-1B-SC	99
R1043-3P-SC	99
R1044-1P-SC	99
R1051-1B-WH	105
R1055-5P-WH	105
R1481-AB	97
R1481-SC	97
R1502-2B-AB	95
R1505-5P-AB	95
R1508-8P-AB	95
R1571-CH	98
R1591-AB	97
R1591-SC	97
R1682-AB	92,98
R1682-SC	98
R1765-5C-CH	104
R1842-2B-BR	103
R1845-5P-BR	103
R1895-5P-BL	104
R2015-5C-CH	123
R2474-BL	108
R2476-BL	108
R24912-12P-CR	102
R2492-2B-BB	103
R2492-2B-CR	102
R2495-5P-BB	103
R2495-5P-CR	102
R2683-AB	97
R2683-SC	97
R2769-9P-CH	104
R4301-1P-AB	113
R4301-1P-BL	108
R4301-1P-SC	113
R4581-1P-AB	99
R4581-1P-BL	99
R4613-BL	98
R4614-BL	98
R5331-1B-AB	113
R5423-3P-AB	107
R5423-3P-BL	107
R5787-1P-AB	113
R5787-1P-SC	113
R6153-3B-CH	121
R6342-2B-AB	101
R6342-2B-BL	100
R6342-2B-SC	100
R6343-3P-AB	101
R6343-3P-BL	100
R6343-3P-SC	100
R6345-5P-AB	101
R6345-5P-BL	100
R6348-8P-AB	101
R6348-8P-BL	100
R6412-2B-BR	130
R6430-1B-BR	130
R6430-1B-SC	130
R6792-2B-PG	104
R6847-CH	108
R6847-CO	108
R7633-3P-CH	104
R80228-10C-SC	121
R80228-3B-SC	121
R8048-BLBS	109
R8071-1P-SC	95
R80D-12EWW	238
R81510-10C-CH	121
R8708-1B-SC	95
R8735-5P-DB	105
R888-8P	123
R9235-GY	102
R9351-1B-AB	96
R9352-2B-AB	96
R9353-3P-AB	96
R9355-5P-AB	96
R9926-BL	109
RS1015	77
RS2000	77
RS2001-1	76
RS2001-2	76
RS2001-3	76
RS2001-4	76
RS2001-50	76
RS2002	76
RS2003	76
RS2004	76
RS2005	76
RS2006	76
RS2007	77
RS2008	77
RS2009	77
RS2010	77
RS2200	77
RS-NUT10	77
S041-BL	201
S041-WH	201
S048-BL	200
S048-WH	200
S318-BL	202
S600-BL	201,202
S620-BL	202
S76	200, 201,
SA-B4-BS	70
SA-P1-CH	88
SB1610	163
SB1650	163
SB8204-AB	161
SBL-18EDL	239
SBL-18EWW	239
SBL-28EDL	239
SBL-28EWW	239
SBL-8EWW	238
SC616-BL	63
SC616-WH	63
SC705-BL	62
SC706-BL	62
SC706-WH	62
SC4005	62
SC4006	62
SCD30-TLT-BL	32
SCD30-TLT-WH	32
SC-P2-BS	71
SD100-BL	37
SD100-BS	37
SD100-SC	37
SD100-SI	37
SD100-WH	37
SD100L-WH	37
SD125L-BL	39
SD125-LFL-WH	38
SD125L-GD	39
SD125L-SC	39
SD125L-WH	39
SD-DIF	38
SD-FG-SC	38
SD-FG-WH	38
SDL235-SI	144
SDM-CG150	233
SDM-CG35	233
SDM-CG70	233
SD-TRIM-BL	38
SD-TRIM-WH	38
SDV76-SI	144
SFE-10CS	56
SFE-18	56
SFE-36	56
SFM-T4-10-WW	247
SFM-T4-18-GN	247
SFT4-BE20	247
SFT4-BE6	247
SFT4-C150	59
SFT4-C300	59
SFT4-C600	59
SFT4-C1600	59
SFT4-C1800	59
SFT4-GN20	247
SFT4-GN6	247
SFT4-RD20	247
SFT4-RD6	247
SFT5-BLB21	247
SFT5-C150	58
SFT5-C1800	58
SFT5-C300	58
SFT5-C600	58
SFT5-DL13	247
SFT5-DL21	247
SFT5-DL28	247
SFT5-GN21	247
SFT5-WW14	247
SGX53-4P-CH	114
SJ-B2-BL	68
SJ-B2-WH	68
SJ-B4-BL	68
SJ-B4-WH	68
SJ-P1-BL	68
SJ-P1-WH	68
SJ-P3-BL	68
SJ-P3-WH	68
SK-B1-BL	67
SK-B1-WH	67
SK-B2-BL	67
SK-B2-WH	67
SK-B3-BL	67
SK-B3-WH	67
SL-35	60
SL-35-BL	60
SL-35-DS	60
SL-60	60
SL-60-BL	60
SL-60-DS	60
SLD18-CW	57
SLED-562-DDS	229
SLED-AMP-1C	232
SLED-DIM	232
SLED-DR-BL	227
SLED-DR-SI	227
SLED-DR-WH	227
SLED-EC15	232,235
SLED-EC20	235
SLED-EC30	232
SLED-EC5	232
SLED-EC60	232
SLED-F60-WW	230
SLED-F240-WW	230
SLED-F600-WW	230
SLED-FEEDF	230,231
SLED-IPEC100	235
SLED-IPEC30	235
SLED-IPEC60	235
SLED-JOINF	230
SLED-M21-DL	231
SLED-M60-DL	231
SLED-M90-DL	231
SLED-PREWIRE	229
SLED-RDIM	232
SLED-RT2WH	209
SLED-UC3-BL	227
SLED-UC3-SI	227
SLED-UC3-WH	227
SLED-UCP-SI	227
SLED-W145-SI	229
SLED-WL16WH	206
SLT4-1200	59
SLT4-600	59
SLT4-900	59
SLT5WW-300	58
SLT5WW-600	58
SLT5WW-900	58
SLT5WW-1200	58
SLU40-CW	57
SLU50-CW	57
SLU-CLIPS	57
SM-B2-AL	71
SM-B2-BS	71
SM-B3-BS	71
SMR-5BWW	238
SMR-5EWW	238
SN-B2-CH	70
SPT-3-10	209
SPT-3-15	209
SPT-3-CON	209
SR-B2-BL	69
SR-B2-WH	69
SR-B3-BL	69
SR-B3-WH	69
SRD48-TLT-SI	32
SRD48-TLT-WH	32
SR-P1-BL	69
SR-P1-WH	69
SR-P3-BL	69
SR-P3-WH	69
SS-B2-CH	71
SSL35-BL	222
SSL35-WH	222
SS-P1-CH	71
SS-P4-CH	71
SSW-PIR	226
SSW-PROX	226
SSW-PROX2	226
ST-B1-CH	78
SV133-SC	142

PRODUCT	PAGE
SVE-T50	234
SVE-T80	234
SV-FLEXO-3	78
SV-GU5.3	244
SV-GU-TCO	244
SV-IP55-SS	36
SV-IP65-WH	36
SV-ROPE5-98	78
SVU-05-BS	228
SVU-05-CH	228
SVU-13-SC	228
SVU-13-WH	228
SVU-21DR-WH	228
SVU-319-BS	228
SVU-319-CH	228
SVU-319-WH	228
SVU-365-BS	228
SVU-DR-SC	228
SVU-DR-WH	228
SVU-F11-SC	228
SVU-F11-WH	228
SVULED-BAR3-SI	229
SX-B2-SC	70
SY-P3-SG	71
SZ-B2-SC	70
SZ-P3-BL	70
T300-BL	202
T308-BL	202
T376	202
TK-1000-BL	75
TK-1000-SI	75
TK-1000-WH	75
TK121-WH	72
TK123-SI	74
TK-2000-BL	75
TK-2000-SI	75
TK-2000-WH	75
TK21-BL	73
TK21-WH	72
TK391-SI-CH	74
TK-CORNER-BL	75
TK-CORNER-SI	75
TK-CORNER-WH	75
TK-CROSS-BL	75
TK-CROSS-WH	75
TK-END-BL	75
TK-END-SI	75
TK-END-WH	75
TK-JOIN-BL	75
TK-JOIN-SI	75
TK-JOIN-WH	75
TKL202-SI	74
TKL401-500-WH	72
TKL401-BL	73
TKL401-WH	72
TKL503-BL	73
TKL503-SI	74
TKL503-WH	72
TKL504-BL	73
TKL504-WH	72
TKL706-BL	73
TKL706-WH	72
TK-ROD1000	75

PRODUCT	PAGE
TK-TEE-BL	75
TK-TEE-SI	75
TK-TEE-WH	75
TL2143	18
TLED19-BL	17
TLED19-WH	17
TLED36-BL	19
TLED36-WH	19
TTUBE-4EWW	239
TUBE300-LEDWW	241
TUBE500-LEDWW	241
UL2149-CH	18
UL6021-AB	18
VINTAGE-8E64	239
WBF110	182
WBF145	182
WBP110	182
WBP145	182
WF-36-WH	56
WL1091-WH	82
WL1273-BL	81
WL1273-SC	81
WL1273-WH	81
WL1277-AB	93
WL1277-BL	93
WL1277-SC	93
WL1602	84
WL1606	84
WL1647	84
WL1669	84
WL1674-CH	81
WL1674-WH	81
WL167-WH	80
WL1686-WH	83
WL1687-WH	83
WL1688-WH	83
WL170-BL	80
WL170-WH	80
WL-201	84
WL2198	87
WL2252-WH	91
WL2671-AB	92
WL3259-AB	92
WL3259-CH	92
WL3361	87
WL3371	87
WL3413	87
WL362	87
WL3781-WH	82
WL3788-WH	79
WL3867-BL	79
WL3867-GD	79
WL3867-WH	79
WL4046-MX	86
WL4337	94
WL6010-BL	89
WL6010-WH	89
WL6261-BZ	94
WL6410-AB	88
WL6410-BL	88
WL6410-WH	88
WL6519-AB	91
WL6519-SC	91

PRODUCT	PAGE
WL7031-BL	89
WL7031-WH	89
WL8189	84
WL8339	85
WL8429	85
WL8436	85
WL8445	85
WL8446	85
WLC2163	94
WLL9287-BL	86
WLL9287-RD	86
WLS9287-RD	86
WLS9287-WH	86

NAME	PAGE
ABLE	181
ACENT	119
ADELINE	106
ADRA	112
AGATHA	95
AIDAN	55
ALDO	81
ALOGENO	222
ALVIE	109
AMARI	89
AMBROSIA	104
AMOR	108
ANNA	131
ARC	194
ARCHER	54
ARCO	185
ARLO	19
ARNO	175
ARTTICUS	160
ASTRA	57
ATOM	130
AURA	89
AVELLINO	169
BALTIMORE	185
BARRET	219
BEAUFORT	109
BERTLAND	146
BIRK	172
BUXTON	161
CAGE	24
CALI	188,192
CALLEN	64
CAMPANIA	173
CANTARA	82
CASCADE	125
CASTRA	173
CENTURION	24
CERCHIO	195
CHICAGO	186
CILINDRO	180
CLEMMIE	108
CLIFFORD	93
CLINICAL	23
COEN	181
COLUMBUS	157
CORBAN	55
CROYDON	170
DAVENPORT	172
DAWSON	91
DELLA	96
DEPOT	110
DEREX	190,191
DEVON	99
DOCKS	165
DOT	85
DOTTIE	85
ECHO	163
ECLIPSE	184
EDEN	189
EDISON	117
EDWIN	92,98
ELLIE	127
EMERSON	95
ENZO	183
EQUATOR	31
ERICA	79
ETTA	92
FERN	188
FISHERMAN	108,113
FLUX	92
FRAME	26
FRANKIE	161
FUNGO	189
GALAXY	120
GEO	183
GIRARE	195
GIRO	185
GLOW	122
GOTHIC	130
GUARD	108
HALE	124
HARLOW	183
HERITAGE	96
HOLLYWOOD	51
HYTHE	191
IGNACIA	105
INDUSTRY	110
INTENSE	219
ION	57
JACK	166,167
JASMINE	102,103
JESSIE	68
JOVI	193
KADE	67
KASKO	165
KEA	187
KIYO	88
KOLTON	80
KORA	17
LEON	54
LINDON	205
LOGAN	99
LOLITA	135
LOUISA	103
LOXLEY	52
LUCCA	168
LUNA	44
LYTTON	157
MADDOX	91
MAHINA	32
MARCO	156
MARTINA	107
MAVEN	109
MAXIM	25
MAYPOLE	100,101
MESA	186
MIDA	131
MILUN	79
MINIMALIST GRAND	86
MINIMALIST PETITE	86
MULTIFORM	27
NOJORD	131
NORDICA	81
NORVIN	183
NOVA	17
NOX	221
ODESSA	104
ORSON	53
OTTO	169
PARKER	183
PERCY	163
PINNACLE	207
PIPA	205
POLO	159
PROVADO	175
QUADE	85
QUINCY	102
REAGAN	69
RETHO	85
RETRO MODERN	111
RIBBON	139
ROHAN	82
ROSCOE	66
RUBEN	55
RYLAND	145
SANDWELL	170,171
SANSA	55
SASSA	107
SEGMENTO	117
SHOJI	161
SILO	63
SILOH	54
SOFIA	105
SOLO	16
SOPHIA	133
SPRUCE	207
STRING	123
SULLIVAN	63
SYBIL	106
SYLVIA	97
TABITHA	65
TALIA	54
TERRAN	207
TITAHA	32
TOBIAS	55
TRANSLUSIVE	120
TRIANGLE	164
TUI	187
TULIP	104
TURIN	169
TUSON	186
TWIRL	123
TWISTER	125
VELA	116
VELIA	30
VITA	187
VITTOTRIA	169
WILLOW	121
XANDRA	121
XANTHI	61
XAVIER	53
YARRA	129
ZELIG	175
ZEN	158
ZIA	192
ZURI	83

Can’t find a product in our Catalogue?

Not all of our extensive lighting range is published in this catalogue.
Try searching for the product on our website. If you have a product model code, type the exact code directly into the search box on the top left of the website.

Top Tip: To get the best results possible, be specific in your searches! If your searching for a specific product, then use the full product code, product name or specific key words such as ‘white LED spotlight’ – generic searches can lead to broad results, and may make it harder to find what you’re looking for.

Search Box on Home page

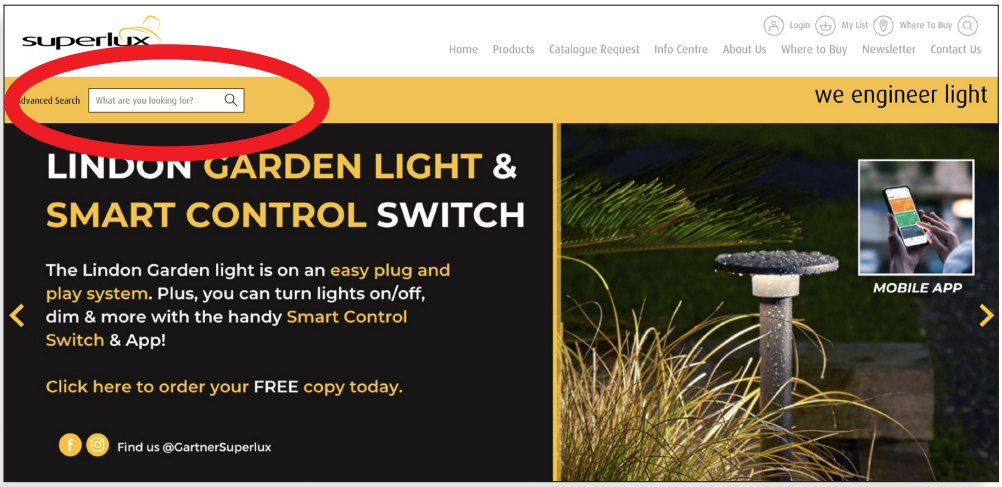

Search results for “White LED Spotlight”

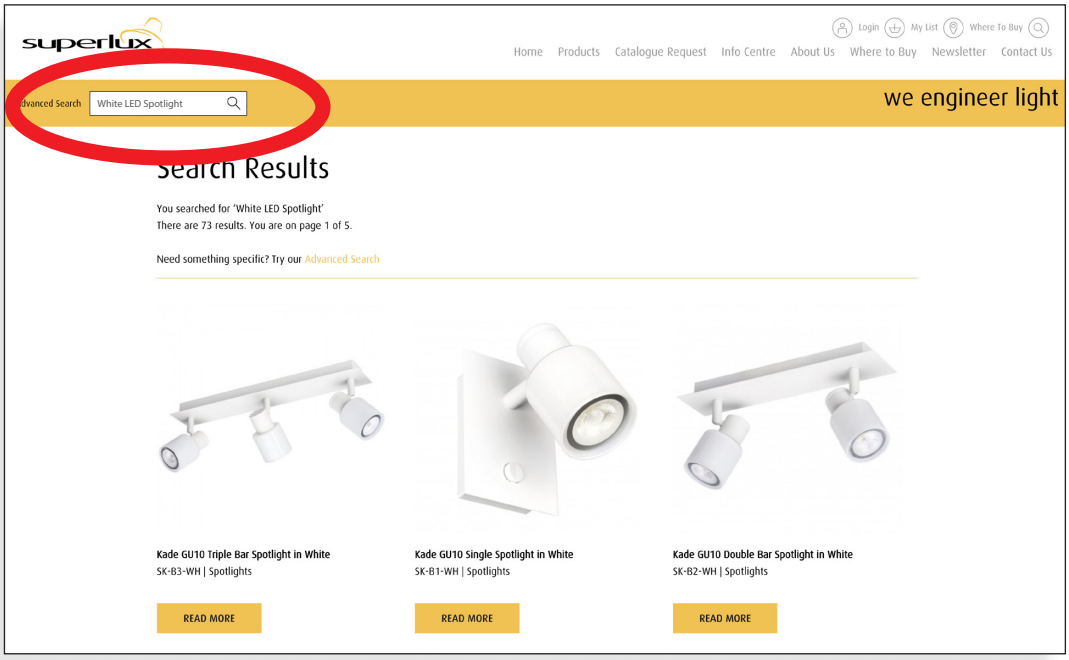

Superlux Website Search tips...

Know exactly what you are looking for?
We can help you find a specific product even quicker, through the 'Advance Search' filters on our website.

Cut through thousands of products in seconds. Simply click the 'Advance Search' button in the yellow banner of our website top left and use any of the 14 filters on the left side of the screen to narrow down your options.

You can narrow down your results by colour, mounting type, technology and more.

Want to start your search again? No problem simply click the 'Reset Filters' button and your free to start searching for the next product.

Advanced Search button

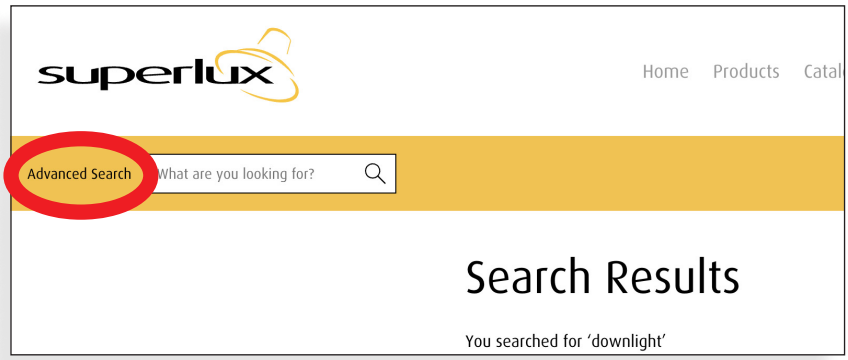

Multiple Advance Search Filters

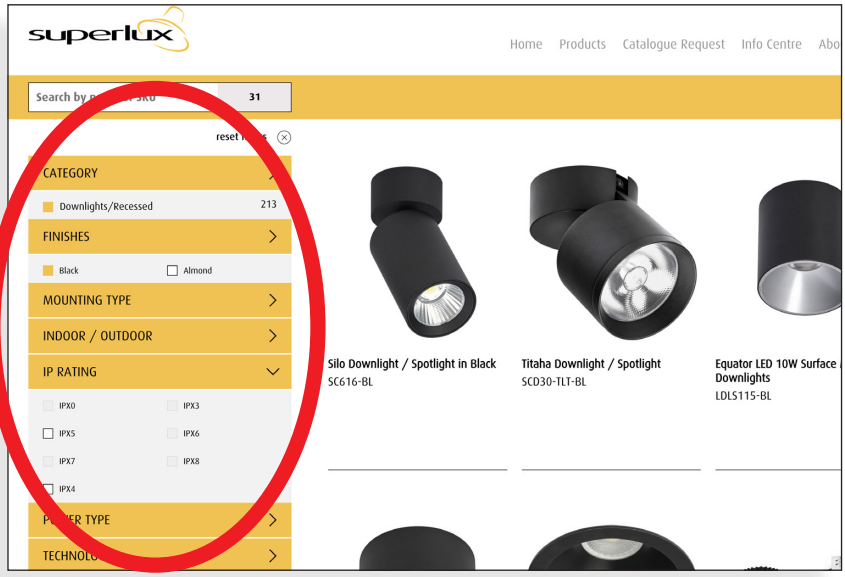

Is the product your looking for no longer available?
We understand it can be frustrating when the product your looking for is no longer available, that's why we've introduced a 'Similar Products' feature to our website.

If you're searching for a product, we have obsoleted / permanently removed from our website – where possible, we'll show you some suggested products below your search results.

These suggested products aim to make it easier for you to find a replacement or similar product, without having to start your search from the beginning.

Similar Products results for a code that is obsolete

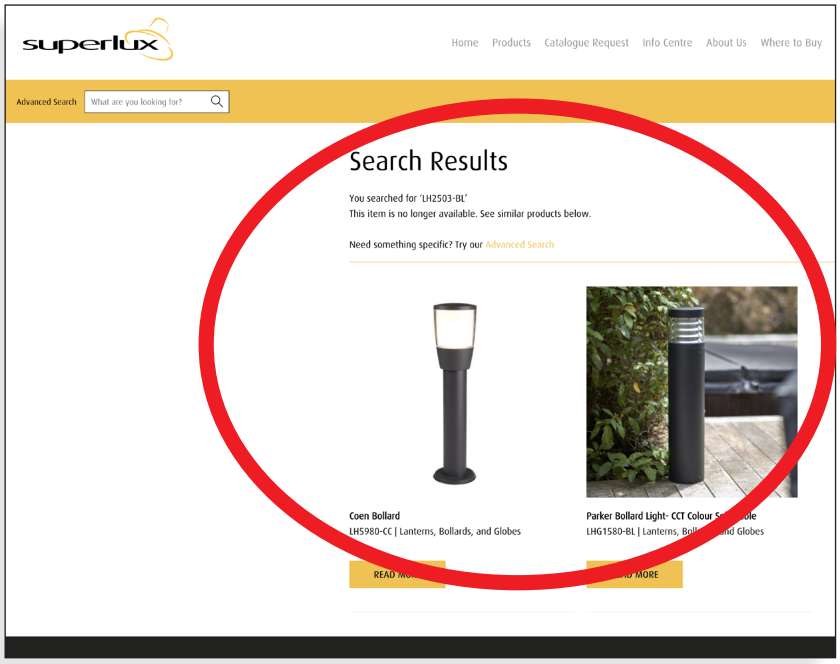

Icon Guide

	RMC - Regulatory Compliance Mark
	Operates within AS-NZ EMC limits
AS-NZ Approved	Has declared article approval
304 Stainless Steel	304 stainless not recommended for marine area
316 Stainless Steel	316 stainless steel suitable for marine area
ta 38°C Max	Max ambient temp 38°C
0.5M	Maintain min distance of lit items from lamp for standard fire safety
EEI Complies	Minimum performance energy standard
185 x 185mm	Hole cut dimensions
F	Suitable for mounting on normally flammable surfaces
60 MIN	Fire rated to 60 mins
CV 12V	Constant Voltage **xx** Voltage LED only use recommended power supply
CC 350mA	Constant current **xxx** mA LED only use recommended power supply
MAX. 100W	Maximum wattage per lamp holder
220V-240V	Mains voltage
	Earthed
	Double insulated class two construction
12V	Extra low voltage 12V power supply required
III	Extra low voltage SELV
ECG	Electronic control gear
CCG	Conventional control gear

DCM	Fitting can be directly ceiling mounted
LED	Integral LED lighting fixture
LIGHT CUT OFF	Dark Sky ULOR - Upward Light Output Ratio less than 5%
76mmØ	Fits 76mm external diameter pole
60mmØ	Fits 60mm external diameter pole
	Photocell automatic operation of light on between dusk & dawn
	The installation requires a drainage system of 30cm (gravel)
	Do not install in areas at risk of flooding

GU 10	Mains voltage lamp cap
R7s 78	Linear lamp 78mm length
RX7s 118	Linear Metal Halide Lamp 118mm length
G12	G12 metal halide cap
G 5.3	12V lamp cap pin spacing
G 4.0	12V lamp cap pin spacing
G 6.35	12V lamp cap pin spacing
G9	230V capsule lamp cap
MR11	35mm dia G4.0 reflector lamp
MR16	50mm dia G5.3 reflector lamp
RL111	111mmØ deflector lamp
LED REPLACEABLE	Fitting accepts replaceable LED lamps

COMPACT FLUORO LAMP CAPS			
PL 2 PIN	9W 11W	G23 G23	TC-S TC-S
PL-L 4 PIN	18W 24W 36W	2G11 2G11 2G11	TC-L TC-L TC-L
PL-C 2 PIN	18W 26W	G24d-2 G24d-3	TC-D TC-D
PL-C 4 PIN	18W 26W	G24q-2 G24q-3	TC-DEL TC-DEL
PL-T 4 PIN	26W	GX24q-3	TC-TEL
CIRC 4 PIN	22W 32W 40W	G10q G10q G10q	T-R T-R T-R

T4	Tube 4/8 inch dia
T5	Tube 5/8 inch dia
T8	Tube 8/8 inch dia
T9	Circular tube 1 .1/8 inch dia
Lamps Included	Product comes with bulbs
	Non dimmable

R50	50mm reflector lamp
R63	63mm reflector lamp
R80	80mm reflector lamp
GLS	General lighting service lamp
B15	15mm Bayonet lamp cap
B22	22mm Bayonet lamp cap
PAR 30	Parabolic reflector lamp 30/8inch dia
E14	14mm Edison screw lamp cap
E27	27mm Edison screw lamp cap

To order more catalogues go to the
'catalogue request' page on
our website or scan QR code below

Gartner Superlux Ltd

11 Mahunga Drive, Mangere Bridge
PO Box 13 441, Auckland 1643, New Zealand
t: +64 9 636 6092
sales@superlux.co.nz

www.superlux.co.nz

Superlux Pty Ltd

Level 2, 37 Stanley Street, Peakhurst,
NSW 2210, Australia
t: +61 2 8216 4676
sales@superlux.com.au

www.superlux.com.au

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C139317

