




TYPES OF INSTALLATION



DIMENSIONS	TECHNICAL DATA	FEATURES	SPECIFICATIONS
<ul style="list-style-type: none"> • 260mmØ • Post supplied in two segments use one or two for a height of 700mmH or 1160mmH (460mmL extension post available to purchase separately - PV300-POST) • 114mmØ mounting base 	<p>Total lumens: 200</p> <p>Colour temp: 3,000K</p> <p>Power supply: Solar</p> <p>Wattage: 5</p> <p>Beam angle: 120°</p>	<ul style="list-style-type: none"> • Part of our Freelite™ Solar Lighting range • A simple 'install and forget' solution to outdoor lighting • Lens and light distribution designed for highlighting gardens and foliage • Post supplied in two segments use one or two for a height of 700mmH or 1160mmH, Optional Accessory 460mmL extension post available to purchase separately - PV300-POST • Can be mounted with supplied base or post can be cast directly into concrete • Autonomously lights from dusk till dawn • Smart Energy Management System gradually steps down light output overnight to provide all-night lighting over 2 to 3 days of cloud • Made with quality Aluminium and UV stabilised Polycarbonate • Solar lighting offers a much cheaper, hassle-free installation compared with traditional lighting. With no trenching, cables, or conduits required, these costs are eliminated • 3 year warranty with expected battery life of 5 to 10 years when well situated - view warranty info here. • Battery replaceable • Find out more about our Freelite™ Solar range here 	<p>Material: Aluminium, UV Stabilised Polycarbonate</p> <p>Lamp included: Yes</p> <p>IP Rating: IP65</p> <p>Technology field: LED</p> <p>Indoor / Outdoor: Outdoor</p> <p>Mounting type: In-Ground, Post Lights</p>

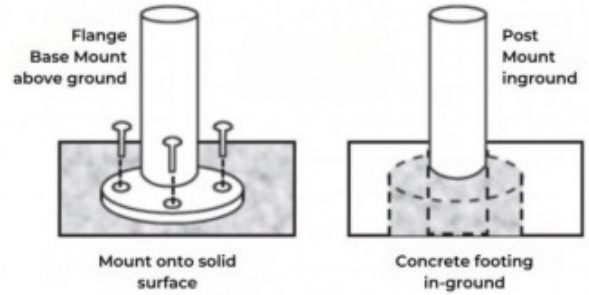