

Installation Instructions


Aluminium Lantern Series




Safety- General Notes

Before commencing installation

- Isolate all cables at the point of installation from the building supply/mains.
- Do not use lamps of a greater wattage than the maximum wattage stated/allowed in the units.

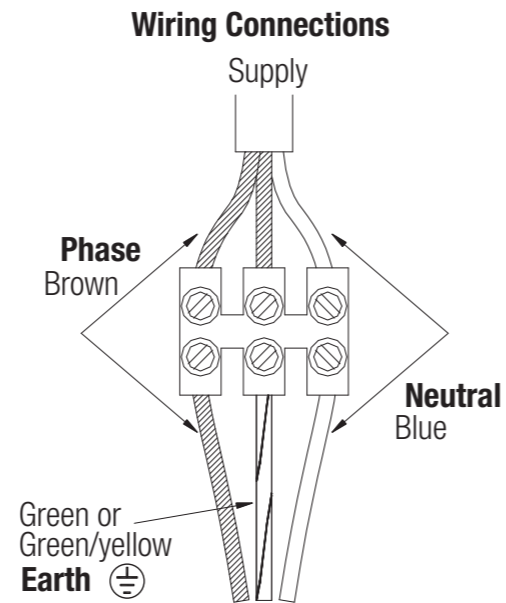

1 Wall Mount Lanterns

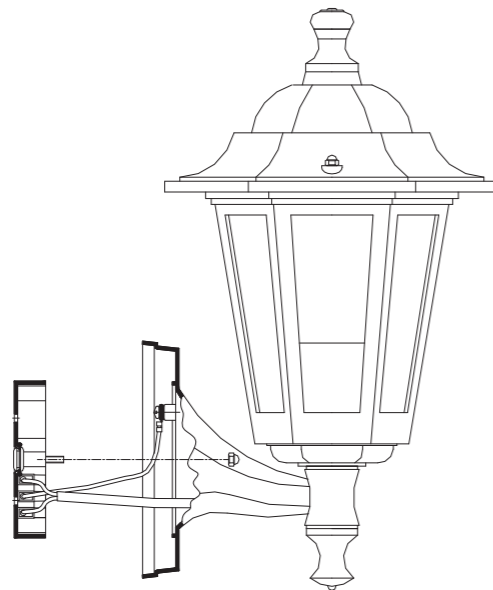


- Affix wiring/mounting box to mounting surface, feeding incoming cable through centre grommet (screws not provided).
- Connect wiring to terminal block, as per general notes (see above).

For IP53

- Caulk top 90% min. of units seating face to surface, and apply small amount under retaining nuts.
- Remove roof retaining nuts or 'Finiale' to gain access to lamp. Insert Edison Screw lamp of appropriate wattage and re-assemble.

2 Post Mount Lanterns

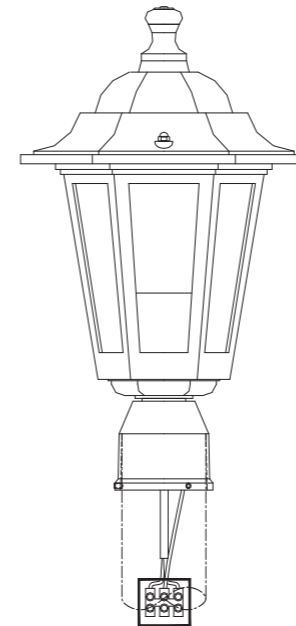

- Mount unit onto Tubular post, connecting wiring as per general notes diagram. (2m maximum post height)
- Tighten all three grub screws equally to keep unit vertical.
- Remove roof retaining nuts or 'Finiale' to gain access to lamp. Insert Edison Screw lamp of appropriate wattage and re-assemble.

3 Maintenance

Metal is prone to some corrosion over time. You can expect this to occur on outdoor lighting, which is exposed to weather continuously. This product is not guaranteed against corrosion, however there are measures you can take to prevent corrosion.

Using a damp cloth wipe the lantern clean on a regular basis especially in areas with salt atmosphere.

Use a car wax on the metal at least once a year to provide a protective coating to the paint.

